

ENVIRONMENT CLEARANCE COMPLIANCE REPORT (October 2024 - March 2025)

For
GRANITE BUILDING STONE QUARRY
Of
Shri. George Kochuparambil
Extent: 12.2987 Ha.

Located at

Sy Nos. : 354/4, 354/5, 355/1pt,
 : 351/1pt, 350, 352/1pt
Village : Manakkad
Taluk : Thodupuzha
District : Idukki
State : Kerala

EC No.1137/EC/SEIAA/KL/2017 Dated: 17/03/2018
EC Revalidated on 02/03/2023.

To,

The Deputy Director of Forests (c)

MoEF, Inetgrated Regional office Kedriya Sadan,
4th Floor, E&F Wings, 17th Main Road,
Koramangala II Block, Bangalore - 560034

Sub: Environmental Clearance Compliance Report for the period October 2024 – March 2025 pertaining to ‘Granite Building Stone Quarry of ‘Shri. George Kochuparambil’

Ref: Environmental Clearance No: 1137/EC/SEIAA/KL/2017, Dated 17/03/2018,

EC Revalidated on 02/03/2023.

Respected Sir,

For Granite Building Stone Quarry of ‘Shri. George Kochuparambil’ EC was obtained vide No. 1137/EC/SEIAA/KL/2017, dated 17.03.2018 and the same was renewed on 02.03.2023 under same file No. with some additional specific conditions.

As per the conditions of above referred Environmental Clearance (EC), please find enclosed compliance report for the period from October-2024 to March-2025 for ‘Granite Building Stone Quarry of Shri. George Kochuparambil’. Also enclosed relevant Annexures in Support of the compliance report for your perusal and record please. A soft copy of the same is sent by email for your record and perusal.

We hope you will find the attached Status Report in Order.

Thanking you,

Yours truly,

For ‘Granite Building Stone Quarry of Shri. George Kochuparambil’



**George Kochuparambil
(Managing Director)**

Encl: as above

Cc: The Member Secretary

State Environment Impact Assessment Authority SEIAA)
Directorate of Environment & Climate Change
4th Floor, KSRTC Bus Terminal, Thampanoor,
Kerala-01

Introduction

Sri. George Kochuparambil, Kochuparambil house, Vazhithala Post, Thodupuzha Taluk, Idukki District, Kerala-685583 has been granted for a mining lease to quarry Granite Building Stone over an area of 12.2987 Ha. in Re-Sy Block No.11, Re-Sy. Nos: 354/4, 354/5, 355/1pt, 351/1pt, 350 & 352/1pt of Manakkad Village, Thodupuzha Taluk, Idukki District, Kerala State vide order No: 451/2018-19/890/M3/2017/DMG dated 01.10.2018 for a period of 12 years from 04.10.2018 to 03.10.2030.

The Environmental clearance is also obtained for this mining lease vide letter no 1137/EC/SEIAA/KL/2017, Dated: 17/03/2018, for 05years with a maximum production of 4,00,000 MTPA. Then, the validity of EC is extended for the project life of 16 years from the date of original EC (i.e.17.03.2018) Vide letter no. 1137/EC/SEIAA/KL/2017 dated 02.03.2023.

The lease is located on the slope of the area gently dipping towards NE. The highest elevation in this area is 145m above MSL and the lowest elevation is 35m above MSL. This granite building stone quarry is located at 6.0 Kms from Manakkad Village in Thodupuzha Taluk. It is at a distance of 10.6 Kms by road from Thodupuzha town. It can be reached from Vazhithala - Parakkadavu Road.

Description of the project

File No.	1137/EC/SEIAA/KL/2017
Name of the project	Granite Building Stone Quarry (Minor Mineral) of Mr. George Kochuparambil
District and state	: Idukki, Kerala
Taluk / Mandal	: Thodupuzha
Village	: Manakkad
Category & Schedule	B2 & Schedule 1(a)
Khasara No. / Plot No. / Block / Gate No. etc.,	: Re-Sy Block No.11, Re-Sy. Nos: 354/4, 354/5, 355/1pt, 351/1pt, 350 & 352/1pt.
Extent of Area	12.2987 Ha
Ownership / Occupancy	: Private Land
Existence of public road/railway line, if any, nearby and approximate distance Nearest Port / Airport	: The nearest railhead – Piravam Road (30 Kms) and Nearest airport – Cochin International Airport (48 Kms) from the mine.
Latitude & Longitude	: N - 09°53'32.72" to N - 09°53'48.09" E - 76°38'21.51" to E - 76°38'36.07"
Address of Registered office	Sri. George Kochuparambil, Kochuparambil house, Vazhithala-Post, Thodupuzha Taluk, Idukki District Pincode: 685 583. E-mail: - unitedgranitesandmetals@gmail.com Website: - www.unitedgranitesandmetals.in

Compliance Status of the Specific & General Conditions for this Project Laid down by the State Level Environment Impact Assessment Authority, Kerala vide

Environment Clearance No.56/2018, Dated:17/03/2018 & EC Revalidation Order No. 1137/EC/SEIAA/KL/2017, dated on. 02-03-2023.

Specific Condition as per letter No. 1137/EC/SEIAA/KL/2017, Dated: 17.03.2018

Sl. No.	Condition	Status of Compliance
1	If any rare, endemic and threatened plant species are noticed, they shall be properly protected insitu or transplanted to a suitable site inside the lease area.	The identified endemic species have been safeguarded and relocated to a designated area selected for their continued growth and protection.

Additional Specific Conditions as per letter No. 1137/EC/SEIAA/KL/2017,

Dated: 02.03.2023

Sl. No.	Condition	Status of Compliance
1	The buffer zone should be maintained with a uniform width of 7.5m and it should be used for developing and maintaining thick green belt.	A uniform 7.5-meter-wide buffer zone has been established around the lease boundary, where a dense green belt has been successfully developed and is being consistently maintained.
2	The garland canal, silt traps and overflow channel should be maintained periodically by cleaning and desilting and geo-tagged photographs of the process should be included in the half yearly compliance report.	The garland canal, silt traps, and overflow channel are regularly cleaned and desilted as needed. Geo-tagged photographs are attached as Annexure- 01.
3	The impact of vibration due to blasting on the nearest houses and other built structures should monitored in terms of	The impact of vibration due to blasting on the nearest houses and other structures is regularly monitored in

	Peak Particle Velocity and amplitude for a maximum charge per delay and included in the Half Yearly Compliance Report.	terms of Peak Particle Velocity and amplitude for the maximum charge per delay. The Blast Induced Ground Vibration Study report is enclosed as Annexure – 24 .
4	NONEL short delay detonator may be used for initiation.	In blasting operations, initiation was carried out using only NONEL short delay detonators.
5	Blasts should be conducted by a blasters or mining mate certificate holder	Blasting operations are conducted exclusively by personnel with statutory certification.
6	To restrict fly rock within 10m, muffling arrangements should be made.	Muffling arrangements, including the use of blast mats, have been made to restrict fly rock within 10 meters.
7	In wake of occurrence of large-scale landslides in the state, as per the information provided by the Department of Mining and Geology, it is directed to use only NONEL for blasting to reduce the vibration of the ground, which is one of the causative factors that triggers landslides, formation of cracks in the surrounding buildings and disturbance to human and wild life.	Only NONEL detonators were used for blasting purposes to minimize ground vibrations and reduce the risk of triggering landslides, formation of cracks in surrounding buildings, and disturbance to both human and wildlife.
8	Blasting mats should be used during rock blasting to contain the blast, prevent fly rocks and suppress dust.	Blasting mats are utilized during rock blasting to control the blast, minimize fly rock, and reduce dust generation. The photograph of the blasting mat is attached as Annexure – 02 .
9	The violation of EC condition may lead to cancellation of EC and action under The Environment (Protection) Act, 1986.	Agreed.

General Conditions

Sl. No.	Condition	Status of Compliance
1	Rainwater harvesting facility should be installed as per prevailing provisions of KMBR/KPBR, unless otherwise specified.	The rainwater harvesting facility has been set up in accordance with the prevailing provisions of KMBR/KPBR. Photographs of the rainwater harvesting ponds are provided in Annexure-03 .
2	Environment Monitoring Cell as agreed under the affidavit filed by the proponent should be formed and made functional.	The Environment Monitoring Cell has been constituted and is actively functioning. Recent Meeting minutes are enclosed as Annexure-04 .
3	Suitable avenue trees should be planted along either side of the tarred road and open parking areas, if any, including approach roads and internal roads.	Suitable avenue trees have been planted along both sides of the tarred road, including approach and internal roads, as well as in open parking areas, wherever applicable. Geo-tagged photographs of the avenue plantation are enclosed as Annexure – 05 .
4	Maximum possible solar energy generation and utilization shall be ensured as an essential part of the project.	The project has adopted solar energy generation and utilization to the maximum extent possible. Photographs of installed solar lights are provided in Annexure – 06 .
5	Sprinklers shall be installed and used in the Project Site to contain dust emissions.	To control dust emissions, sprinklers have been installed and are in regular use at the project site. Additionally, a water tanker fitted with sprinklers is deployed along the haulage roads for effective dust suppression. Photos of the water sprinklers and water tanker with sprinkler are attached as Annexure-07 .
6	Eco-restoration, including the Mine Closure Plan shall be done at the own cost of the Project Proponent.	Agreed.
7	At least 10 per cent of total excavated Pit area should be retained as water storage area and the remaining area should be reclaimed	During the closure of the mine, at least 10 percent of the total excavated pit area will be retained as a water storage area, while

	with stacked dumping and overburden and planted with indigenous plant species that are eco-friendly, if no other specific condition on reclamation of the Pit is stipulated in the EC.	the remaining area will be reclaimed using stacked dumping and overburden, followed by planting indigenous and eco-friendly plant species.
8	Corporate Social Responsibility (CSR) agreed upon by the Proponent should be implemented.	Various Corporate Social Responsibility (CSR) activities have been undertaken, and the list of these activities carried out during this period, along with photos and receipts, is attached as Annexure – 22 .
9	The Lease area shall be fenced off with barbed wires to a minimum height of 4 ft around, before starting of Mining. All the boundary indicators (boards, stores, markings, etc.) shall be protected at all times and shall be conspicuous.	Barbed wire fencing has been erected along the entire lease boundary. Sign boards have been installed at prominent locations. Photos of the fencing and sign boards are attached as Annexure-08 .
10	Warning alarms indicating the time of Blasting(to be done at specific timings) has to be arranged as per stipulations of the Explosives department.	A warning siren is sounded before and after blasting to indicate the scheduled blasting times. Blasting timing boards have been installed at prominent locations. Photographs of the warning siren and safety board displaying blasting timings are attached as Annexure - 09 .
11	Control measures on noise and vibrations prescribed by KSPCB should be implemented.	<p>The following control measures have been implemented to control noise and vibrations as prescribed by KSPCB:</p> <ul style="list-style-type: none"> ➤ Use of controlled blasting techniques, including the use of NONELs. ➤ Utilization of sharp drilling bits, optimal delivery of compressed air, and proper maintenance of compressors, excavators, jackhammers, and tipper trucks. ➤ Regular monitoring of noise levels in both the core zone and the buffer zone of the mining lease area.
12	Quarrying activities should be limited to daytime as per KSPCB guidelines/specific conditions.	Quarrying activities are restricted to daytime only, in accordance with KSPCB guidelines.

13	Blasting should be done in a controlled manner as specified by the regulations of the Explosives department or any other concerned agency.	Controlled blasting techniques, such as the use of NONELs and blast mats, have been implemented as per the regulations of the Explosives Department and other concerned agencies.
14	A licensed person should supervise/control the Blasting Operations	Blasting operations are supervised and controlled by personnel holding a statutory certificate issued by DGMS.
15	Access roads to the quarry shall be tarred to contain dust emission that may arise during the transportation of material.	Access roads to the quarry have been tarred to control dust emissions during material transportation. In addition, regular water sprinkling is carried out to further suppress dust. Photos of access road is attached as Annexure- 11 .
16	Overburden materials should be managed within the site and used for reclamation of Mine Pit as per Mine closure Plan/specific conditions	Overburden material excavated is stacked at a designated location near the quarry lease area and will be utilized for mine pit reclamation as per the Mine Closure Plan, as required.
17	Height of Benches should not exceed 5 M and width should not be less than 5 M, if there is no mention in the Mining Plan/specific conditions	Benches are maintained in a safe manner. Photographs of the site are attached as Annexure – 19 .
18	Mats to reduce fly rock blast to a maximum of 10 PPV should be provided	Mats have been provided to reduce fly rock and minimize the impact of blasting.
19	Maximum depth of mining and general ground level at site shall not exceed 10m	Mining operations were carried out as per the approved mining plan. The maximum depth of mining and the general ground level at the site will be restricted to 10m.
20	No mining operation should be carried out at place having a slope greater than 45°	No mining operations will be carried out in areas with a slope greater than 45°.
21	Acoustic enclosures should have been provided to reduce sound amplifications in addition to the provisions of green belt and hollow bricks envelop for crushers so that the noise level is kept within prescribed standards given by CPCB/KSPCB.	Acoustic enclosures have been provided to reduce sound amplifications.
22	The workers on the site should be provided with the required protective equipment such as ear muffs helmet, etc.	Personal Protective Equipment (PPE), including ear muffs, helmets, and other necessary safety gear, has been provided to

		all workers on the site.
23	Garland drains with clarifiers to be provided in the lower slopes around the core area to channelize storm water.	Garland drains with clarifiers have been provided to channelize stormwater. Photograph of the garland drain is attached as Annexure-01 .
24	The transportation of minerals should be done in covered trucks to contain dust emissions.	The transportation of minerals is carried out in covered trucks to contain dust emissions.
25	The proponent should plant trees at least 5 times the loss that has been occurred while clearing the land for the project.	Afforestation is being carried out to compensate for the loss of trees, with a planting ratio of 5 times the number of trees cleared for the project. Photographs of the plantation activities are attached as Annexure – 18 .
26	Disposal of spent oil from diesel engines should be as specified under relevant Rules/Regulations.	Spent oil is being re-used as a lubricant for drilling purposes.
27	Explosives should be stored in magazines in isolated place specified and approved by the Explosive Department.	Explosives are stored in magazines that are specified and approved by the Explosive Department. The Magazine license is attached as Annexure-12 , and photos of the magazines are provided in Annexure-20 .
28	A minimum buffer distance of 100 M from the boundary of the quarry to the nearest dwelling unit or other structures, not being any facility for mining shall be provided.	There are no dwelling units or other structures situated within 100m of the quarry boundary.
29	100 M buffer distance should be maintained from forest boundaries	The mining area is not located near any forest boundaries.
30	Consent from Kerala State Pollution Control Board under Water and Air Act(s) should be obtained before initiating mining activity.	Consent from the Kerala State Pollution Control Board under the Water and Air Act(s) has been obtained prior to the initiation of mining activities. A copy of the KSPCB consent is attached as Annexure-13 .
31	All other statutory clearances should be obtained, as applicable, by project proponents from the respective competitive authorities including that for blasting and storage of explosives.	All other statutory clearances, including the Panchayat license, have been obtained as required for the project. Copy of the Panchayath License is attached as Annexure – 14 .

32	<p>In the case of any change(s) in the scope of the Project, extent, quantity, process of mining technology involved or in any way affecting the environment parameters/impacts as assessed, based on which only the EC is issued, the project would require a fresh appraisal by this Authority, for which the proponent shall apply and get the approval of this Authority.</p>	<p>There is no change in the scope of the project.</p>
33	<p>The Authority reserves the right to add additional safeguard measures subsequently, if found necessary, and to take action including revoking of the Environmental Clearance under provisions of the Environment (Protection) Act,1986, to ensure effective implementation of the suggested safeguard measures in a time bound and satisfactory manner.</p>	<p>Agreed</p>
34	<p>The stipulations by the Statutory Authorities under different Acts and Notifications should be complied with including the provisions of the Water (Prevention and control of Pollution) Act,1974, the Air (Prevention and control of Pollution) Act1981, the Environment (Protection) Act,1986, the Public Liability (Insurance) Act,1991 and EIA Notification,2006</p>	<p>Agreed</p>
35	<p>The project proponent should advertise in at least 2 newspapers widely circulated in the region, one of which (both the advertisement and the newspaper) shall be in the vernacular language informing that the Project has been accorded Environment Clearance and the copies of the Clearance letters are available with the State Environment Impact Assessment Authority (SEIAA) office and may also be seen on the website of the Authority at www.seiaakerala.org. The advertisement should be made within 10 days from the date of receipt of the clearance letter and a</p>	<p>Advertisements were published in two newspapers:</p> <ol style="list-style-type: none"> 1. The Hindu Daily (English) on 12/04/2018 2. Kerala Kaumudy (Malayalam) on 12/04/2018 <p>Copies of the published advertisements are attached as Annexure-15.</p>

	copy of the same signed in all the pages should be forwarded to the Office of this Authority as confirmation	
36	A copy of the clearance letter shall be sent by the proponent to the concerned Gram Panchayat/District Panchayat/Municipality/Corporation/Urban local Body and also to the Local NGO, if any from whom suggestions/representations, if any were received while processing the proposal. The Environmental Clearance shall also be put on the website of the company by the proponent.	A copy of the Environmental Clearance letter has been provided to the concerned Panchayat. Copy of Panchayat license attached as Annexure-14 .
37	The proponent shall submit half yearly reports on the status of compliance of the stipulated EC conditions including results of monitored data (both in hard copies as well as by e-mail) and upload the status of compliance of the stipulated EC conditions, including results of monitored data on their website and shall update the same periodically. It shall simultaneously be sent to the respective regional office of the MOEF, Govt. of India and also to the State Environment Impact Assessment Authority (SEIAA) office	The half-yearly compliance report, including the results of monitored data, has been submitted to the State Environmental Impact Assessment Authority and the Regional Office of MoEF&CC, Bangalore, as required. Photographs of monitoring activities are included in Annexure-16 , and the monitored data results for Air, Noise, and Water are provided in Annexure-17 .
38	The details of Environment Clearance should be prominently displayed in a metallic board of 3 ft x 3 ft with green background and yellow letters of Times Roman font of size not less than 40. Sign board with extent of Lease area and boundaries shall be depicted at the entrance of the quarry, visible to the public	The details of the Environmental Clearance are prominently displayed on a board as stipulated. Photo of the board displaying EC details are provided in Annexure-10
39	The proponent should provide notarized affidavit (indicating the number and date of Environmental Clearance proceedings) that all the conditions stipulated in the EC shall be scrupulously followed.	Notarized affidavit confirming adherence to all EC conditions has been submitted; copy attached as Annexure – 21 .

40	No change in mining technology and scope of working should be made without prior approval of the SEIAA. No further expansion or modifications in the mine shall be carried out without prior approval of the SEIAA, as applicable.	Prior approval from the SEIAA will be sought in case of change of mining technology or scope of working.
41	The Project proponent shall ensure that no natural water course and/or water resources shall be obstructed due to any mining operations. Necessary safeguard measures to protect the first order streams, if any, originating from the mine lease shall be taken.	There are no natural water courses or first order streams within the mining lease area; thus, no obstruction has occurred due to mining operations.
42	Monitoring of Ambient Air Quality to be carried out based on the Notification 2009, as amended from time to time by the Central Pollution Control Board. Water sprinkling should be increased at places loading and unloading points & transfer point to reduce fugitive emissions.	Monitoring of Ambient Air Quality is carried out periodically as per CPCB norms. Monitoring photos are attached as Annexure – 16 and monitoring reports are enclosed as Annexure – 17 . Regular water sprinkling is undertaken at key locations to control fugitive dust emissions.
43	The top soil, if any, shall be temporarily be stored at earmarked site(s) only for the topsoil shall be used for land reclamation and plantation. The Over burden (OB) generated during the mining operations shall be stacked at earmarked dump site(s) only. The maximum height of the dumps shall not exceed 8 m and the width 20 m and overall slope of the dumps shall be maintained to 45°. The OB dumps should be scientifically vegetated with suitable native species to prevent erosion and surface run off. In critical areas, use of geo-textiles shall be undertaken for stabilization of the dump. The entire excavated area should continue until the vegetation becomes self-sustaining	Topsoil generated is stored in the designated area and will be used for afforestation and greenbelt development. Overburden is separately stacked and stabilized by planting locally available shrubs and grasses to prevent erosion and surface runoff.
44	Catch drains and siltation ponds of appropriate size shall be constructed around the mine working, mineral and OB dumps to prevent run off of water and flow of	Catch drains have been constructed around the mining workings, and the runoff water is directed to siltation ponds and subsequently to the Rainwater Harvesting

	<p>sediments directly into the river and other water bodies. The water so collected should be utilized for watering the mine area, roads, green belt development, etc. The drains shall be regularly de silted particularly after monsoons and maintained properly</p>	<p>Pond. Water from the RWHP is utilized for dust suppression, road maintenance, and green belt development. Drains are regularly de-silted, especially post-monsoon, and are properly maintained. Photos of Garland Drains and RWHP are attached as Annexure – 01 and Annexure – 03.</p>
45	<p>Effective safeguard measures such as regular water sprinkling shall be carried out in critical areas prone to air pollution and having high levels of PM10 and PM2.5 such as haul road, loading and unloading points and transfer points-it shall be ensured that the Ambient Air Quality parameters conform to the norms prescribed by the Central Pollution Control Board in this regard.</p>	<p>Regular water sprinkling is carried out in critical areas prone to air pollution, such as haul roads, loading and unloading points, and transfer points, using water tankers and sprinklers. Photos of water sprinklers and water tanker with sprinkler are attached as Annexure – 07.</p> <p>Ambient air quality is monitored regularly to ensure conformity with the norms prescribed by the Central Pollution Control Board.</p> <p>Ambient air quality Monitoring photos are attached as Annexure – 16 and monitoring reports are enclosed as Annexure – 17.</p>
46	<p>Fugitive dust emissions from all sources should be controlled regularly. Water spraying arrangements on haul roads, loading and unloading and transfer points should be provided and properly maintained.</p>	<p>Water sprinkling arrangements have been made on haul roads, loading and unloading points, and transfer points, and are being properly maintained to control fugitive dust emissions.</p>
47	<p>Measures should be taken for control of noise levels below 85 dB (A) in the work environment.</p>	<p>Adequate measures for noise control, such as the use of PPEs and proper maintenance of machinery, have been adopted to ensure noise levels remain below 85 dB (A) in the work environment.</p>
48	<p>A separate environmental management cell with suitable qualified personnel should be set up under the control of a senior executive, who will report directly to the head of the Organization.</p>	<p>An Environmental Management Cell has been established and is fully functional. The details of the Environmental Monitoring Cell and meeting minutes are attached as Annexure – 4.</p>
49	<p>The funds earmarked for environment protection measures and CSR activities should be kept in a separate account and</p>	<p>The funds earmarked for environmental protection measures and CSR activities are</p>

	should not be diverted for other purpose. Year wise expenditure should be reported to the State Environment Impact Assessment Authority (SEIAA) office.	kept in a separate account and are not diverted for any other purpose.
50	The Regional Office of MOEF and CC located in Bangalore shall monitor compliance of the stipulated conditions. The Project authorities should extend full cooperation to the Officer(s) if the Regional Office by furnishing the requisite data/information/monitoring reports	Agreed
51	Any appeal against the Environment Clearance shall lie with the National Green Tribunal, if preferred, within a period of 30 days as prescribed under Section 16 of the National Green Tribunal Act, 2010	Agreed
52	Concealing the factual data or submission of false/fabricated data and failure to comply with any of the conditions mentioned above may result in withdrawal of this clearance and attract action under provisions of the Environment (Protection) Act, 1986.	Agreed
53	The Regional Office of MOEF and CC located in Bangalore shall monitor compliance of the stipulated conditions. The Project authorities should extend full cooperation to the Officer(s) if the Regional Office by furnishing the requisite data/information/monitoring reports	Agreed
54	The above conditions shall prevail notwithstanding anything to the contrary, inconsistent or simplified, contained in any other permit, license or consent given by any other authority for the same project.	Agreed
55	The order is valid for a period of 5 years of the expiry date of Mine lease period issued by the Government of Kerala, whichever is earlier	Noted
56	The Environment Clearance will be subject to the final order of the courts in any	Agreed

	pending litigation related to the land or the project, in any court of law.	
57	The Mining operations shall be restricted to above ground water table and it should not intersect ground water table.	Mining operations will be carried out above the ground water table and will not intersect the Ground water table.
58	All vehicles used for transportation and within the mines shall have 'PUC' certificate from authorized pollution checking center. Washing of all vehicles shall be inside the Lease area	All vehicles used for transportation within the mine and for other operations have valid PUC certificates from authorized pollution checking centers. Vehicle washing is carried out within the lease area.
59	Project proponent should obtain necessary prior permission of the competent authorities for drawl of necessary quantity of surface and ground water for the project.	No surface or ground water will be extracted for dust suppression or any other activities. The primary water source for the project will be the Rainwater Harvesting Pond located within the mining lease area. Photos of the Rainwater Harvesting Pond are attached as Annexure – 03 .
60	Regular monitoring of flow rates and water quality upstream and downstream of the springs and perennial nallahs flowing in and around the mine lease area shall be carried out and reported in the six-monthly reports to SEIAA	No perennial nallah flows through the lease or exist around the Mine Lease.
61	Occupational health surveillance program of the workers should be undertaken periodically to observe any contractions due to exposure to dust and take corrective measures, if needed.	All employees are covered under health insurance. Copy attached as Annexure 23 .

For Granite Building Stone Quarry of Sri. George Kochuparambil


 George Kochuparambil.
 Managing Director
 Date: 13-05-2025.

Annexure-1

GARLAND DRAINS & SILT SETTLING TANKS



Unnamed Road, Manakkad, Kerala 685583, India


Lat 9° 53' 46.16639" N Long 76° 38' 26.80991" E

Local 11:11:56 AM

Altitude 65 meters

GMT 05:41:56 AM

Date Fri, 07 Mar 2025

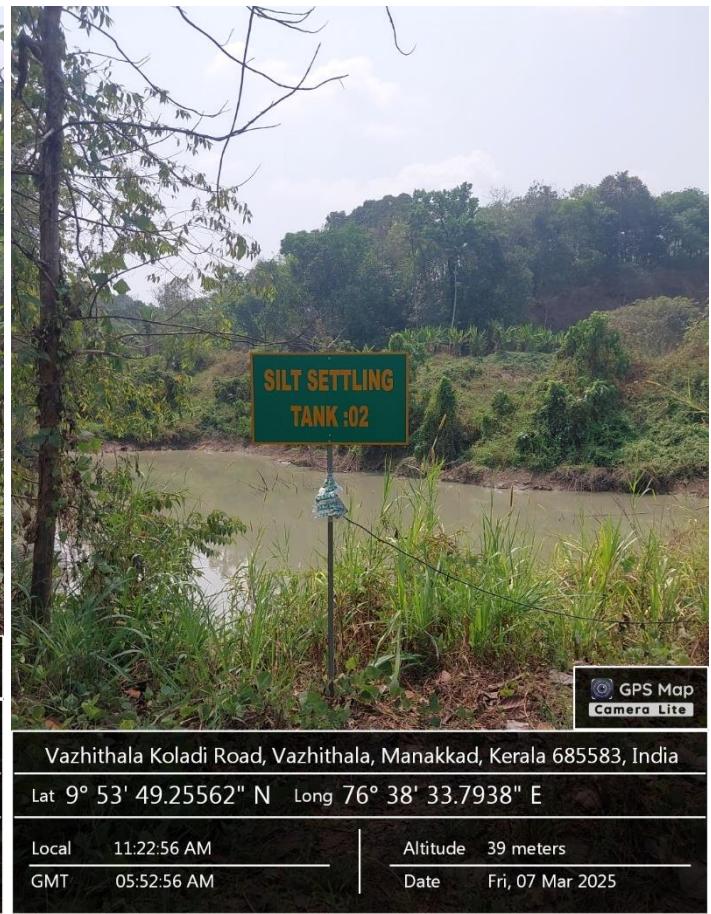

Annexure-2
BLASTING MATS



GPS Map
Camera Lite

Unnamed Road, Manakkad, Vazhithala, Kerala 685583, India

Latitude

9° 53' 40.74256" N

Local 12:26:05 PM
GMT 06:56:05 AM

Longitude

76° 38' 25.72667" E

Altitude 93 meters
Friday, 07.03.2025

Annexure-3

RAINWATER HARVESTING PONDS



GPS Map
Camera Lite

Unnamed Road, Manakkad, Kerala 685583, India

Lat 9° 53' 46.80308" N Long 76° 38' 26.35346" E

Local 11:09:42 AM
GMT 05:39:42 AM

Altitude 65 meters
Date Fri, 07 Mar 2025



GPS Map
Camera Lite

Unnamed Road, Manakkad, Kerala 685583, India

Lat 9° 53' 44.49962" N Long 76° 38' 30.73337" E

Local 11:14:27 AM
GMT 05:44:27 AM

Altitude 57 meters
Date Fri, 07 Mar 2025

Annexure-4

EMC MEETING MINUTES

Minutes of the 31st meeting of the Environment Monitoring Committee held on 11.01.2025 at 3.30 PM.

Minutes of 30th meeting is reviewed.

1. The volleyball court is ready to use
2. Solar light in front of canteen is to be ~~done~~ installed.

New Points

1. Road work

a) Vazhithala — Koladi Road. We have concreted both side shoulders of this road for a distance of 2 kms helping the residents / villagers using this road.

b) Vazhithala — Parakkadavu road. We purchased about 6 cents of land adjacent to this road and handed over to P.W.D. They have widened this road and thus the Sharp bend is reduced.

2. Due to seasonal changes, the leaves from most of the trees are falling. 3 persons are engaged daily for sweeping the ~~roads~~ internal tarm and tiled roads.

3. Rain Water Harvesting Pond at Eastern side has to be modified before next rainy season.

4. The 'U' sections casted in concrete are to be fixed by the side of new road for the continuity of gulland drain.

5. Manakkad Panchayat constructed a Gym for public use. We contributed to this cause by building the roof of ~~the~~ at a cost of Rs 6000/-

6. Pilgrims to SABARIMALA temple, a famous temple in Kerala is frequented by lakhs of devotees. Road Sign boards

are fixed at conspicuous places giving proper direction.

7. Plastic eradication.





As part of this drive, we have supplied 9000 bags for storing plastic items. Each house is given 1 bag which are later emptied by Panchayat authorities. Total cost is about Rs 5 lakhs.


8. Water mist arrangement is made in front of weighbridge, crusher, main office. The whole area is sprinkled with water to suppress dust. A static water tank of 40,000 litres capacity is fabricated with steel to store water and automatically sprinkle during the day.

9. Readings of rain water gauge are noted daily.

10. Similarly wind direction is also monitored and recorded. Wind direction indication flags are installed for this.

Members.

1. Mr. Balu P. Ponlose 
2. Mr. Joseph K.Y 
3. Mr. Prasanth P.P. 
4. Mr. Joony Joy 
5. Mr. John Peter. 


(Sonu Jose)
Head of Committee.

Minutes of the 38th meeting of the Environment Monitoring Committee held on 27th March at 3:00 PM.

Minutes of the 31st meeting is reviewed

1. 'u' sections casted are to be fixed. Road height has to be increased for this.


2. The modification of the rain water harvesting pond is in progress. The water ~~at~~ from top at Northern side are to be diverted to the above pond. So a water trap is under construction.

3.

New Points

1. Summer is at its peak. Water spraying in the mine and also Vazhithala road is increased.
2. Watering of trees planted this year and last year ~~and~~ are done regularly.
3. As per the decision of the Govt of India Electric detonators are banned from 1st April 2025. Suitable alternatives are not commercially available. For the time being we will be using OD with ~~the~~ safety fuse for fixing N.O.E.L.
4. Vazhithala Service Co-operative bank is celebrating its 100th year. They are constructing 6 houses to be donated to needy public. We are providing all aggregates and sand for this.

Members

1. Mr. Baby P. Panise ~~Hari~~ 2. Mr. Joseph K.Y 
3. Mr. Poosanth P.P. ~~Pratik~~ 4. Mr. Jeany Joy 
5. Mr. John Peter. 

Mr. Sam Jose
(Head of Committee)

Annexure-5

AVENUE PLANTATION



GPS Map
Camera Lite

Vazhithala To Parakkadavu Road, Kolady, Manakkad, Vazhithala, Kerala 685583, India

Latitude
9° 53' 39.43111" N
Local 10:51:41 AM
GMT 05:21:41 AM

Longitude
76° 38' 15.49579" E
Altitude 46 meters
Friday, 07.03.2025



GPS Map
Camera Lite

VJWP+7V4, Vazhithala To Parakkadavu Road, Kolady, Manakkad, Vazhithala, Kerala 685583, India


Lat 9° 53' 41.11742" N Long 76° 38' 19.54262" E

Local 10:47:56 AM
GMT 05:17:56 AM

Altitude 61 meters
Date Fri, 07 Mar 2025

Annexure-06

SOLAR LIGHTS

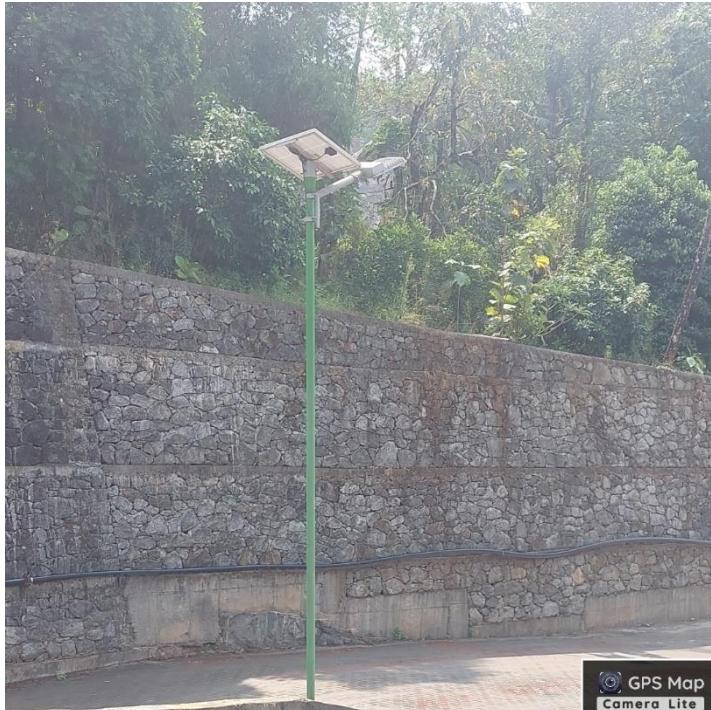

GPS Map
Camera Lite

VJWP+7V4, Vazhithala To Parakkadavu Road, Kolady, Manakkad,
Vazhithala, Kerala 685583, India

Lat 9° 53' 41.31348" N Long 76° 38' 20.7168" E

Local 11:02:18 AM

GMT 05:32:18 AM

Altitude 62 meters

Date Fri, 07 Mar 2025



GPS Map
Camera Lite

VJWP+7V4, Vazhithala To Parakkadavu Road, Kolady, Manakkad,
Vazhithala, Kerala 685583, India

Latitude
9° 53' 39.55142" N

Local 10:50:44 AM
GMT 05:20:44 AM

Longitude
76° 38' 15.55008" E

Altitude 46 meters
Friday, 07.03.2025

Annexure-07

**WATER SPRINKLERS & WATER
TANKERS**



VJWP+7V4, Vazhithala To Parakkadavu Road, Kolady, Manakkad,
Vazhithala, Kerala 685583, India

Latitude
9° 53' 40.29115" N

Longitude
76° 38' 20.29333" E

Local 10:59:45 AM
GMT 05:29:45 AM

Altitude 61 meters
Friday, 07.03.2025



Unnamed Road, Manakkad, Vazhithala, Kerala 685583, India

Lat 9° 53' 38.54602" N Long 76° 38' 27.68914" E

Local 08:54:35 AM
GMT 03:24:35 AM

Altitude 126 meters
Date Fri, 07 Mar 2025



Annexure-08


FENCING & SIGN BOARDS



Vazhithala To Parakkadavu Road, Kolady, Manakkad, Vazhithala, Kerala 685583, India

Latitude
9° 53' 37.40564" N
Local 01:37:23 PM
GMT 08:07:23 AM

Longitude
76° 38' 26.53742" E
Altitude 107 meters
Friday, 07.03.2025

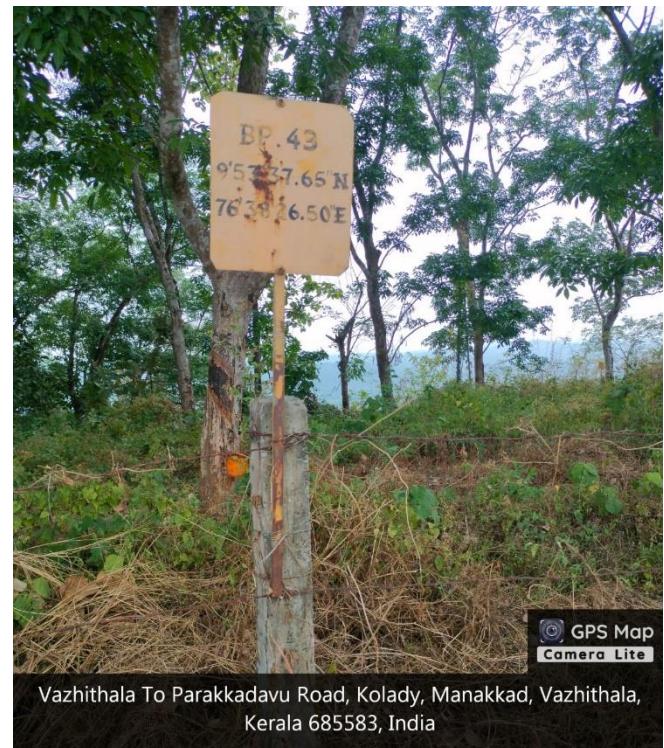

Vazhithala To Parakkadavu Road, Kolady, Manakkad, Vazhithala, Kerala 685583, India

Latitude
9° 53' 37.5918" N
Local 01:36:56 PM
GMT 08:06:56 AM

Longitude
76° 38' 26.45873" E
Altitude 107 meters
Friday, 07.03.2025



Vazhithala To Parakkadavu Road, Kolady, Manakkad, Vazhithala, Kerala 685583, India

Latitude
9° 53' 37.42847" N
Local 01:36:36 PM
GMT 08:06:36 AM

Longitude
76° 38' 26.54012" E
Altitude 107 meters
Friday, 07.03.2025




GPS Map
Camera Lite

VJWP+7V4, Vazhithala To Parakkadavu Road, Kolady, Manakkad, Vazhithala, Kerala 685583, India

Lat 9° 53' 43.957" N Long 76° 38' 22.29151" E

Local 10:44:36 AM
GMT 05:14:36 AM

Altitude 77 meters
Date Fri, 07 Mar 2025

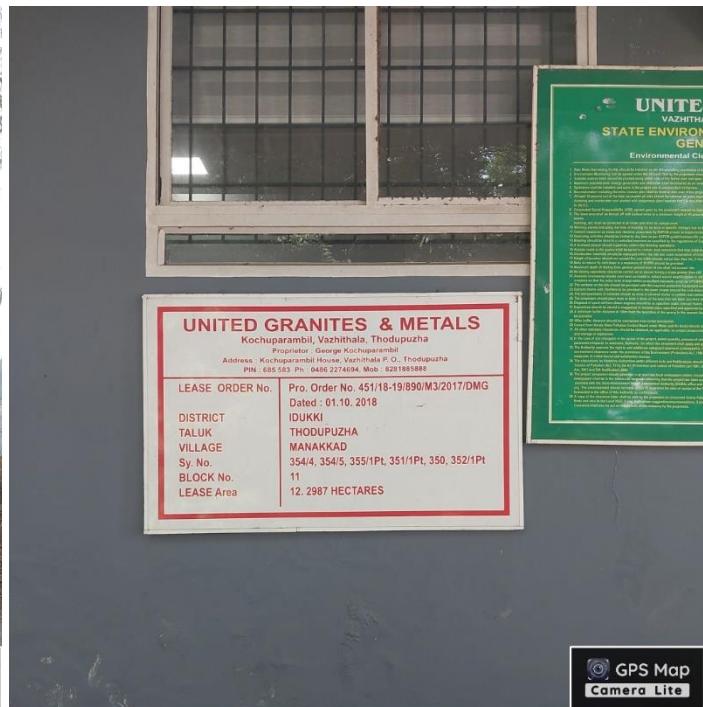

GPS Map
Camera Lite

VJWP+7V4, Vazhithala To Parakkadavu Road, Kolady, Manakkad, Vazhithala, Kerala 685583, India

Lat 9° 53' 39.94022" N Long 76° 38' 19.90208" E

Local 10:54:39 AM
GMT 05:24:39 AM

Altitude 61 meters
Date Fri, 07 Mar 2025



GPS Map
Camera Lite

Vazhithala To Parakkadavu Road, Kolady, Manakkad, Vazhithala, Kerala 685583, India

Latitude 9° 53' 35.46398" N
9° 53' 35.46398" N
Longitude 76° 38' 26.68092" E
76° 38' 26.68092" E
Local 01:34:34 PM
GMT 08:04:34 AM
Altitude 129 meters
Friday, 07.03.2025



GPS Map
Camera Lite

Unnamed Road, Manakkad, Kerala 685583, India


Latitude 9° 53' 51.91188" N
9° 53' 51.91188" N
Longitude 76° 38' 27.92652" E
76° 38' 27.92652" E
Local 01:18:21 PM
GMT 07:48:21 AM
Altitude 77 meters
Friday, 07.03.2025



VJWP+7V4, Vazhithala To Parakkadavu Road, Kolady, Manakkad, Vazhithala, Kerala 685583, India


Latitude
9° 53' 40.62757" N
Local 10:55:44 AM
GMT 05:25:44 AM

Longitude
76° 38' 20.57744" E
Altitude 61 meters
Friday, 07.03.2025

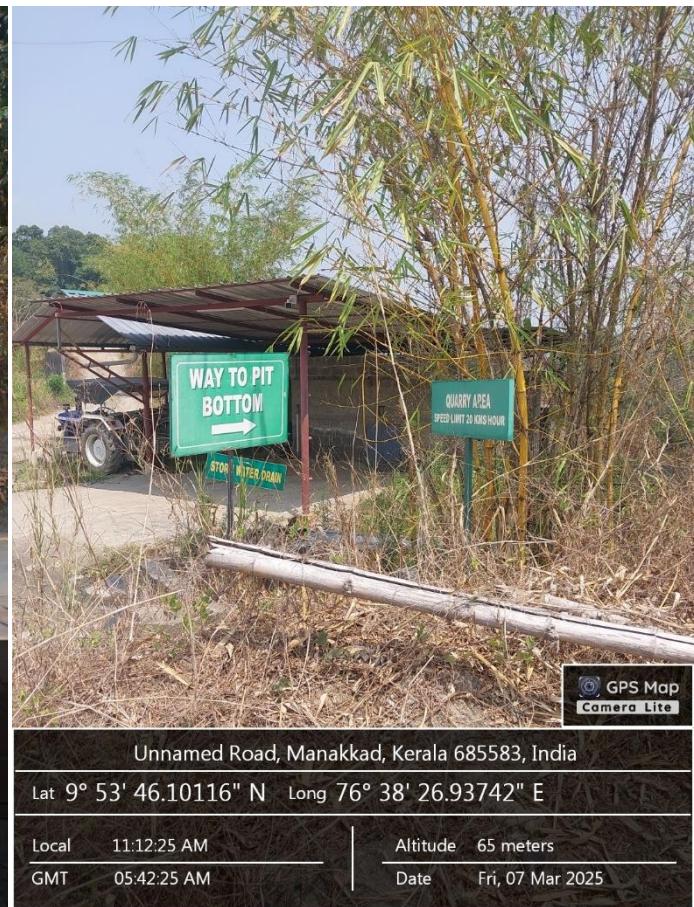

Unnamed Road, Manakkad, Kerala 685583, India

Lat 9° 53' 46.10116" N	Long 76° 38' 26.93742" E
Local 11:12:25 AM	Altitude 65 meters
GMT 05:42:25 AM	Date Fri, 07 Mar 2025

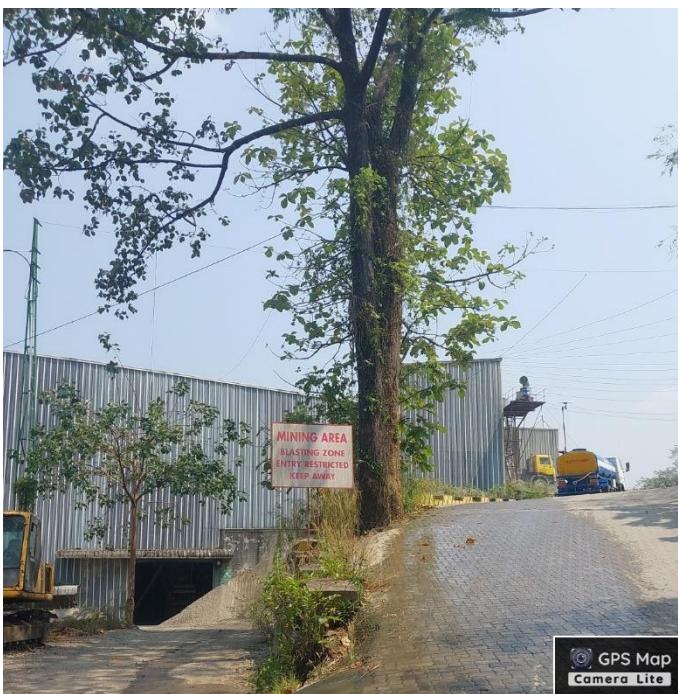


VJWP+7V4, Vazhithala To Parakkadavu Road, Kolady, Manakkad, Vazhithala, Kerala 685583, India

Lat 9° 53' 43.51081" N Long 76° 38' 21.2766" E

Local 11:04:54 AM
GMT 05:34:54 AM

Altitude 77 meters
Date Fri, 07 Mar 2025

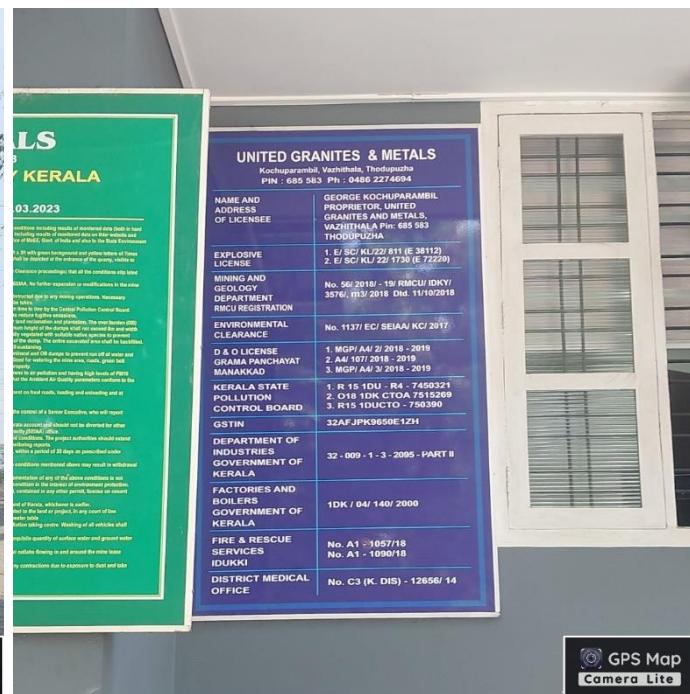

VJWP+7V4, Vazhithala To Parakkadavu Road, Kolady, Manakkad, Vazhithala, Kerala 685583, India

Lat 9° 53' 39.86081" N Long 76° 38' 19.82594" E

Local 10:55:00 AM
GMT 05:25:00 AM

Altitude 61 meters
Date Fri, 07 Mar 2025



VJWP+7V4, Vazhithala To Parakkadavu Road, Kolady, Manakkad,
Vazhithala, Kerala 685583, India

Lat 9° 53' 42.60131" N Long 76° 38' 21.36581" E

Local 11:04:12 AM	Altitude 77 meters
GMT 05:34:12 AM	Date Fri, 07 Mar 2025



Unnamed Road, Manakkad, Vazhithala, Kerala 685583, India

Latitude 9° 53' 44.86312" N Longitude 76° 38' 26.35055" E

Local 11:06:27 AM Altitude 81 meters

GMT 05:36:27 AM Date Friday, 07.03.2025



VJWP+7V4, Vazhithala To Parakkadavu Road, Kolady, Manakkad,
Vazhithala, Kerala 685583, India

Latitude 9° 53' 39.31012" N Longitude 76° 38' 18.31326" E

Local 10:53:20 AM Altitude 61 meters

GMT 05:23:20 AM Date Friday, 07.03.2025

Annexure-09

WARNING SIREN & BOARD

INDICATING BLASTING TIMINGS



Annexure-10

BOARD INDICATING EC DETAILS



VJWP+7V4, Vazhithala To Parakkadavu Road, Kolady, Manakkad,
Vazhithala, Kerala 685583, India

Lat 9° 53' 39.86236" N Long 76° 38' 19.78188" E

Local 10:54:51 AM


Altitude 61 meters

GMT 05:24:51 AM

Date Fri, 07 Mar 2025

Annexure-11

ACCESS ROAD

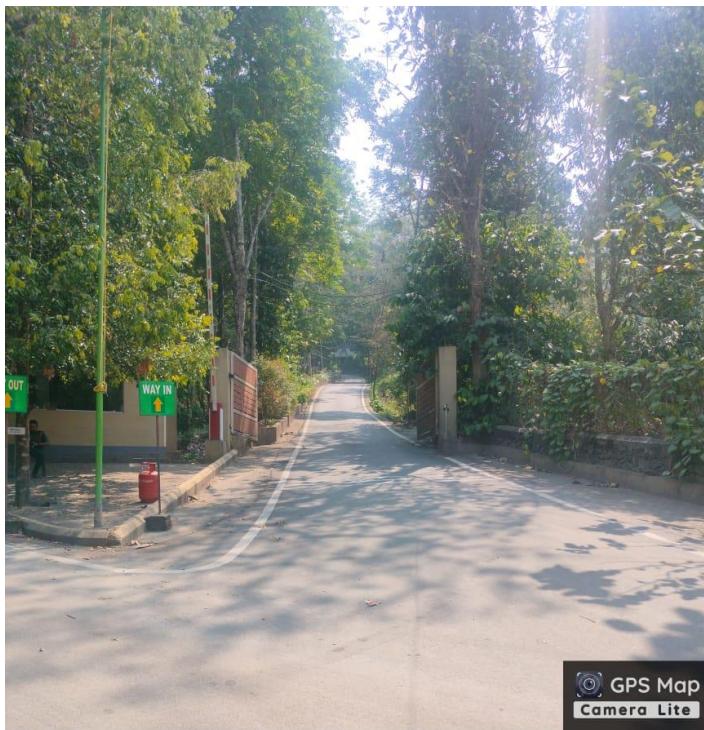

Vazhithala To Parakkadavu Road, Kolady, Manakkad, Vazhithala, Kerala 685583, India

Latitude
9° 53' 39.37625" N

Local 10:51:31 AM
GMT 05:21:31 AM

Longitude
76° 38' 15.47167" E

Altitude 49 meters
Friday, 07.03.2025




Vazhithala To Parakkadavu Road, Kolady, Manakkad, Vazhithala, Kerala 685583, India

Latitude
9° 53' 39.4395" N

Local 10:50:54 AM
GMT 05:20:54 AM

Longitude
76° 38' 15.55386" E

Altitude 49 meters
Friday, 07.03.2025

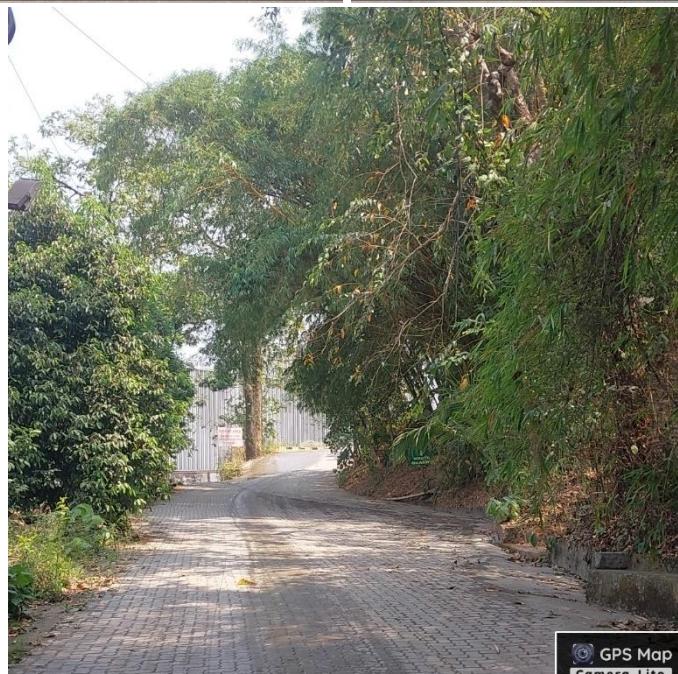

VJWP+7V4, Vazhithala To Parakkadavu Road, Kolady, Manakkad, Vazhithala, Kerala 685583, India

Lat 9° 53' 41.58125" N Long 76° 38' 21.12425" E

Local 11:03:48 AM
GMT 05:33:48 AM

Altitude 77 meters
Date Fri, 07 Mar 2025

Annexure-12

MAGAZINE LICENSE



भारत सरकार | Government of India

वाणिज्य और उद्योग मंत्रालय | Ministry of Commerce & Industry
 पेट्रोलियम तथा विस्फोटक संस्थान (पीएओ) | Petroleum & Explosives Safety Organisation (PESO)
 पूर्व नाम: विस्फोटक विभाग | Formerly- Department of Explosives
 A और D . विंग, ब्लॉक 1-5, दूसरा तला, शास्त्री भवन। A & D - Wing, Block 1-5, 2nd Floor, Shastri Bhawan
 26 हनुमानगढ़ रोड, नूगम्बलम चेन्नई। 26 Hannoan Road, Nungambakkam Chennai 600066
 फोन (Phone): 28284023 | फैक्स (Fax): 28284848

संख्या (No.): E/SC/KL/22/1730(E72220)

दिनांक (Date): 11/06/2024

सेवा में | To,

Shri GEORGE KOCHUPARAMBIL,
 KOCHUPARAMBIL HOUSE, VAZHITHAL, P.O. THODUPUZHA, IDUKKI DISTRICT, Town/Village - VAZHITHAL,
 District-IDUKKI, State-Kerala, Pincode - 685583

विषय: Survey No.359, Block No. 11, Manakkadu (v), Thodupuzha Taluk, Idukki District, Kerala में मेलर्स Shri GEORGE KOCHUPARAMBIL द्वारा विस्फोटक के लिए नियमित रूप से 2008 के अंतर्गत LE-3 में जारी अनुमति से E/SC/KL/22/1730(E72220) के संदर्भ में।
 (प्राधिकृत अधिकारी/अधिकारी में परिवर्तन)

Subject: Possession for Use of Explosives from magazine situated at Survey No.:359, Block No. 11, Manakkadu (v), Thodupuzha Taluk, Dist. Idukki, Kerala - Licence No.: E/SC/KL/22/1730(E72220) granted in Form LE-3 of Explosives Rules, 2008 -
 (Change in Authorized Signatory/Occupier).

महोदय | ०२,

आपका उपर्युक्त लिखा पर का संख्या 123213 दिनांक 11/06/2024 का संदर्भ प्रकाश करो।
 Please refer to your letter no. 123213 dated 11/06/2024.

अनुमति संख्या E/SC/KL/22/1730(E72220) प्राधिकृत अधिकारी/अधिकारी ने परिवर्तन के संदर्भ में याद संबोधित कर भेजी जा रही है।
 The Licence No.: E/SC/KL/22/1730(E72220) is forwarded herewith duly amended in respect of following :

Charge is Authorized Signatory/Occupier

लाइसेंस रिकॉर्ड में प्राधिकृत अधिकारी/अधिकारी के नाम इस प्रकार है।
 The following are the names of the Authorized Signatory/Occupier in the licensee records:

क्र. सं. No	नाम Name
1)	Sri.GEORGE KOCHUPARAMBIL (Authorized Signatory)
2)	Sri.GEORGE KOCHUPARAMBIL (Occupier)

किसी भी एक समय में साइडले क्षमता नियमिति का तथा मात्रा से अधिक नहीं होगी।
 The licence capacity at any one time shall not exceed the kinds and quantities mentioned below :

संख्या No	विस्फोटक Explosives	वर्ग Class	प्रभाव Div	उप-प्रभाव Sub Div	क्षमता Capacity	इकाई Unit
1	Ordnance/Electric/Non-Electric Detonators	6	3	0	10000	Nos.
2	Safety Fuse	6	1	0	3000	Mtrs.
3	Nitrate Mixture	2	0	0	400	Kg.

किसी एक कॉलेंडर मास में छारी जाने वाले विस्फोटक की मात्रा (अनुच्छेद 3 (ए) और (ए) के अधीन अनुमति के लिए लग) : 20 गुना
 Quantity of explosives to be purchased in a calendar month/applicable for licence under article 3(b) and (c) : 20 times as above.

यह अनुमति दिनांक 31 मार्च 2027 तक प्रतुष होगी।
 This Licence shall remain valid till 31st day of March 2027.

अनुमति के आगामी नवीकरण हेतु कृपया विस्फोटक नियम, 2008 के नियम 112 के अंतर्गत प्रक्रिया का पालन करें। कृपया पालती दें।
 For further re-validation(if required), please follow the procedure under Rule 112 of Explosives Rules, 2008. Receipt of this letter may please be acknowledged.

100% द्वारा | Your's faithfully

(डॉ. ए. ए. थानुलिङ्गम | Dr. T. L. THANULINGAM
 अनुकूल पुरुष विस्फोटक नियंत्रक | Joint Chief Controller of Explosives

दक्षिणांचल, चेन्नई | South Circle, Chennai

प्राप्तिक्रिया प्राप्ति | Copy Forwarded to:

- उप मुख्य विस्फोटक नियंत्रक कोची।
 The Dy. Chief Controller of Explosives, Kochi
- दिस्ट्रीक्ट मैगिस्ट्रेट, Idukki, Kerala with reference to his No. No: E2.50676/12/K.Dia Dated: 30/11/2013
- सुप्रीमिंटेंट ऑफ पोलीस, Idukki, Kerala.

संयुक्त मुख्य विस्फोटक नियंत्रक | Joint Chief Controller of Explosives
 दक्षिणांचल, चेन्नई | South Circle, Chennai

(अधिक जानकारी जैसे अविदेन की सिलेंस, शुल्क अदि के लिए हमारी वेबसाइट <http://peso.gov.in> देखें।
 (For more information regarding status, fees and other details please visit our website <http://peso.gov.in>)

Note :- This is system generated document does not require physical signature. Applicant may take printout for their

records.

अनुमति प्राप्त दस्ता F-3 | LICENCE FORM LE-3
(विस्कोटक नियम, 2008 की अनुसूची 4 के भाग । के अनुसूचित (क) से (८) देखिए।)

(ग) उपयोग के लिए एक समय वर्ग 1,2,3,4,5 वा वर्ग 7 के विस्कोटक या किसी मैटल में वर्ग 6 के विस्कोटक रखने के लिए अनुमति
Licence to possess : (e) for use, explosives of class 1, 2,3,4,5 or 7 in a magazine

अनुमति सं. (Licence No.) : E/SC/KL/22/1730(E72220)
वार्षिक फीस रुपय (Annual Fee Rs): 2400/-



1. Licence is hereby granted to

Shri GEORGE KOCHUPARAMBIL (प्रेसिपोरी / Occupier : Sri GEORGE KOCHUPARAMBIL), KOCHUPARAMBIL
HOUSE, VAZHITHALA P.O, THODUPUZHA, IDUKKI DISTRICT, Town/Village - VAZHITHALA, District-IDUKKI, State-Kerala,
Pincode - 685583

को अनुमति अनुदात की जाती है।

2. अनुमतिदाती की प्राप्तिकी | Status of licensee : Proprietorship Firm

3. अनुमति नियमिति विद्युत प्रवेशन के लिए विधिमान्य है।
Licence is valid only for the following purpose.

4. अनुमति विस्कोटकों के नियमिति किसी प्रकार और मात्रा के लिए विधिमान्य है।

Licence is valid for the following kinds and quantity of explosives: - (क) (a)

क्र. No.	नाम और विवरण Name and Description	वर्ग और प्रभाग Class & Division	उप-प्रभाग Sub-division	मात्रा किसी एक रामण में Quantity at any one time
1.	Nitrate Mixture	2.0	0	400 Kg.
2.	Ordinary/Electric/Non Electric Detonators	6.3	0	10000 Nos.
3.	Safety Fuse	6.1	0	3000 Mtrs.

(क) किसी एक कोर्डर मास में हल्काएं जाने वाले विस्कोटक की मात्रा (अनुसूचि 3(क)) और (ग) के अधीन अनुमति के लिए

(b) Quantity of explosives to be purchased in a calendar month/applicable for licence under article 3(b) and (c) :

5. नियमिति विद्युत रेक्षावित्र (रेक्षावित्र) से अनुमति प्राप्त की गई होती है।

The licensed premises shall conform to the following drawing(s) :-

6. अनुमति प्राप्ति पारित नियमिति को पार रखता है। The licensed premises are situated at following address:

Survey No. 359, Block No. 11, ग्राम (Town/Village) : Manakkadavu, Thodupuzha, तालुक पुलिस पार्टी (Police Station) : Thodupuzha

प्रिल (District) : IDUKKI राज्य (State) : Kerala पिनकोड (Pincode) : 685583
दूरभाष (Phone) : ई. मेल (E-Mail) : [\[Redacted\]](mailto:)

7. अनुमति प्राप्ति में नियमिति विद्युत रेक्षावित्र अंतर्भूत है।

The licensed premises consist of following facilities.

8. अनुमति समय - समय पर यात्रावाहित विस्कोटक अधिनियम, 1884 और उनके अधीन विराजित विस्कोटक नियम, 2004 के उपर्योग, शर्तों और अतिरिक्त शर्तों और नियमिति उपायदण्डों के अधीन रहते हुए अनुदात की जाती है।

The licence is granted subject to the provision of Explosives Act 1884 as amended from time to time and the Explosives Rules, 2008 framed there under and the conditions, additional conditions and the following Annexures.

1. उपर्युक्त क्रम सं. 5 में यथ कथित रेक्षावित्र (स्थान, सत्रियां संख्या और अन्य विवरण दर्शात करते हुए)।

Drawings (showing site, constructional and other details) as stated in serial No. 5 above.

2. अनुमति प्राप्तिकारी व्यावहारिक इकान की शर्तों और अतिरिक्त शर्तों।

Conditions and Additional Conditions of this licence signed by the licensing authority.

3. दूरी प्राप्ति DE-2 | Distance Form DE-2.

9. यह अनुमति तारीख 31 मार्च 2019 तक विधिमान्य रहेगी। This licence shall remain valid till 31st day of March 2019.

यह अनुमति, अधिनियम या उसके अधीन विरचित नियमों या अनुसूची V के भाग 4 के प्रति निर्दिष्ट टेट-VII के अधीन तथा उपवर्जित इस अनुमति की शर्तों का अधिकाम करने या पदि

अनुमति प्राप्ति प्राप्ति की शर्तों का उत्तरोत्तर उपराप्त में दर्शात विवरण के अनुसूची नामी पार जाने पर नियमिति या प्रतिसंहित की जानकारी है, जहां वह ताया हो।

This licence is liable to be suspended or revoked for any violation of the Act or Rules framed there under or the conditions of this licence as set forth under Set VIII, wherever applicable, referred to in Part 4 of Schedule V or if the licensed premises are not found conforming to the description shown in the plans and Annexure attached hereto.

तारीख | The Date - 01/04/2015

संयुक्त मुख्य विस्कोटक नियंत्रक | Joint Chief Controller of Explosives
South Circle, Chennai

Amendments :

- Amendment of Quantity of Explosives/Monthly Purchase Limit dated : 29/06/2018
- Change in Postal Address dated : 10/06/2024
- Amendment in Drawings/Facilities/Premises dated : 10/06/2024
- Amendment of Quantity of Explosives/Monthly Purchase Limit dated : 10/06/2024
- Change in Authorized Signatory/Occupier/Partners/Directors dated : 11/06/2024

Transfers :

- Change in Licensee Name/Address/Status dated : 10/06/2024
- Change in Licensee Name/Address/Status dated : 10/06/2024

नवीकरण के प्रमाणकन के लिए स्थान
Space for Endorsement of Renewal

नवीकरण की तारीख Date of Renewal	समाप्ति की तारीख Date of Expiry	अनुमति प्राप्तिकारी के हस्ताक्षर और स्टैम्प Signature of licensing authority and stamp
31/01/2022	31/03/2027	Sd/- Dy. Chief Controller of Explosives, Ernakulam

कानूनी दोषावधी : विस्कोटकों की गलत ढंग से घाताने या उनका दुरुपयोग विधि के अधीन गंभीर दायिक अपराध होगा।
Statutory Warning : Mishandling and misuse of explosives shall constitute serious criminal offence under the law.

Note :- This is system generated document does not require physical signature. Applicant may take printout for their records.

Digitally signed by Dr T L THANULINGAM
Reason: Licence No. : E/SC/KL/22/1730
Location: Chennai (E7220)

सेट VIII | Set VIII

मैगजीन में वर्ग 1,2,3,4,5,6, और 7 के विस्टोटों को बिल्कुल या प्रयोग हेतु रखने के लिए प्रवृत्त प्रति. 3 (ख) से (ग) में मुख्य विस्टोटक नियंत्रक या विस्टोटक नियंत्रक द्वारा प्रदान किए जाने वाले अनुच्छेद से E/SC/KL/22/1730(E72220) की शर्त नियमितिहास है।
 The following are the conditions of licence number E/SC/KL/22/1730(E72220) to possess for sale or use, explosives of Class 1,2,3, 4, 5, 6 and 7 in a magazine in Form LE-3 (article 3(b) to (e)) granted by Chief controller of Explosives or Controller of Explosives.

- परिसर में किसी भी समय विस्फोटकों की मात्रा अनुचापन योग्य सामर्थ्य से अधिक नहीं होगी ।
The quantity of explosives on the premises at any one time shall not exceed the licensable capacity.
- विस्फोटकों के भंडारण के लिए प्रयुक्त कार होने वाली मैगजीन अनुशासी III और अनुशासि के उपायांथ में विनिर्दिष्ट सुरक्षा दूरी बनाए रखना होगा।
The magazine for storage of explosives shall maintain safety distance specified in Schedule III and annexure to the licence.
- मैगजीन का प्रयोग उन सभी विस्फोटकों के, जो इस अनुशासी में विनिर्दिष्ट है, रखे जाने के लिए और ऐसे रखे जाने से संबंध आधार या औजार या उपकरणों के रखे जाने के लिए ही किया जाएगा; अन्यथा नहीं ।
The magazine shall be used only for keeping all explosives specified in this licence and of receptacles for, or tools or implements for work connected with the keeping of such explosives.
- पैकजों को खोलने का कार्य और विस्फोटकों को खोलने तथा पैक करने का कार्य मैगजीन में नहीं किया जाएगा ।
The opening of packages and the weighing and packing of explosives shall not be carried on in the magazine.
- दो या दो से अधिक वर्षन के विस्फोटकों को, जिन्हें मैगजीन में रखे जाने की अनुमती दी जा सकती है, मैगजीन में तभी रखे जाएंगे जब उनमें से प्रत्येक को, ऐसे पदार्थ या स्वरूप का कोई मध्यवर्ती विभाजक लगाकर या उनके बीच ऐसा मध्यवर्ती स्थान छोड़कर, परस्पर प्रपक कर दिया जाए कि किसी कवर से विस्फोटक में लगाने वाली भाग या होने वाला विस्फोटक किसी अन्य वर्षन के विस्फोटक तक न पहुँच सके : परतु -
(अ) 2 (नाइट्रो मिश्रण), वर्ग 3 (नाइट्रो योगिक) के विभिन्न विस्फोटक, वर्ग 6 प्रथम प्रभाग के अंतर्गत आनेवाले विस्फोटक प्रेरक पलीते, जिनमें कोई सुल्ता लोहा या इस्पात नहीं है, एक दूसरे के साथ बिना किसी मध्यवर्ती विभाजक या स्वरूप के रखे जा सकते हैं ।
(अ) वर्ग 6 प्रथम 3 के अंतर्गत आनेवाले विस्फोटक प्रेरक अलग रखे जाएंगा ।
(ब) वर्ग 1 के अंतर्गत आने वाले बालूद को अलग रखा जाएगा ।
- Two or more description of explosives which may be permitted to be kept in the magazine shall be kept only if they are separated from each other by an intervening partition of such substance or character, or by such intervening space, as will effectively prevent explosion or fire in the one communicating with the other; Provided that—
(d) the various explosives of Class 2 (nitrate-mixture), Class 3 (nitro-compound), safety fuses belonging to Class 6 Division 1 and detonating fuses belonging to Class 6 Division 2 as do not contain any exposed iron or steel, may be kept with each other without any intervening partition or space ;
(e) Detonators belonging to Class 6 Division 3 shall be kept separately.
(f) Gun powder belonging to Class 1 shall be kept separately.
- वर्ग 3 (नाइट्रो योगिक) के विस्फोटकों को, उनके विनिर्माण की तारीख से एक वर्ष बीत जाने के पश्चात सिवाय अनुचापन प्राधिकारी की विशेष मंजूरी के मैगजीन में नहीं रखा जाएगा ।
Explosives of Class 3 (nitro compound) shall not be kept in the magazine after the expiration of one year from the date of their manufacture except with the special sanction of licensing authority.
- वर्ग 3 (नाइट्रो योगिक) के विस्फोटकों को, उनके विनिर्माण की तारीख से एक वर्ष बीत जाने के पश्चात मैगजीन में तभी रखा जाएगा जब कि किसी विस्फोटक नियंत्रक ने इसके लिए विशेष मंजूरी दे दी हो ।
(i) जब ऐसी मंजूरी दे दी गई हो तो प्रत्येक नियंत्रक पर किसी विस्फोटक नियंत्रक से ऐसा लिखित प्रमाणपत्र अभिप्राप्त कर लिया जाए जिसमें दी गई मंजूरी के अंतर्गत आनेवाली अवधि दर्शित की गई हो और ऐसे प्रमाणपत्र के अनुशासितारी अपने पास रखेंगा और माग की जाने पर प्रस्तुत करेंगा ।
(ii) जब विस्फोटक मानक शुद्धता का न रह जाने के कारण या द्रव्यकीरण या नाइट्रो लीटीसरीन या द्रव नाइट्रो योगिक के निकट जाने के लिए प्रकट होने के कारण मैगजीन में भाउरिट किए जाने के उपयुक्त नहीं रह जाता है तो अनुशासितारी अपने ही व्यय पर ऐसे विस्फोटक के निपाटरे के लिए ऐसे निदेशों का अनुचापन करेंगा जो मुख्य नियंत्रक या विस्फोटक नियंत्रक जारी करे ।
Explosives of Class 3 (nitro compound) shall not be kept in the magazine after the expiration of one year from the date of their manufacture except with the special sanction of the Controller of Explosives.
(i) When such sanction has been given, a written certificate showing the period covered by the sanction shall be obtained from the Controller of Explosives at each inspection, and shall be kept by the licensee and produced on demand.
(ii) When an explosive owing to its being no longer of standard purity or owing to signs of liquefaction or of exuded nitro-glycerin or liquid nitro-glycerin or liquid nitrocompound is no longer fit for storage in the magazine or store house the licensee shall comply, at his own expense, with such directions as to its disposal as the Chief Controller or Controller of Explosives may issue.
- मैगजीन के भीतरी भाग या उसमें लगी बैचों, शैल्कों और उसकी किटिंग का इस प्रकार संत्रिमांश किया जाएगा या उन्हें इस प्रकार अंतरित या अवरित किया जाएगा कि विस्फोटक का किसी लोहे या इस्पात के साथ संपर्क रोका जा सके । भीतरी भाग में लगी बैचों, शैल्कों और किटिंग या प्रायोगिक यित्र से मुक्त एवं साफ रखे जाएंगे तथा ऐसे विस्फोटक, जो जल से सुखानाम करूप में प्राप्तवित हो सकते हैं, इस बाबत सम्भक सावधानी बरती जाएगी कि वहाँ कोई जल मौजूद न रहे । परंतु किसी लोहे या इस्पात के खुले होने के लियाँ दाव या सावधानी से संबंधित इस शर्त का वह भाग ऐसे में भवन में बायोकर नहीं होगा जिसमें वर्ग 6 (गोला बालूद) के प्रथम के विस्फोटक से जितन कोई विस्फोटक रखा गया है ।
The interior of the magazine and the benches, shelves and fittings therein shall be so constructed or so lined or covered as to prevent the exposure of any iron or steel contact with the explosives. Such interior, benches, shelves and fittings shall so far as is reasonably practicable, be kept free from grit and shall otherwise be clean; and in the case of any explosives liable to be dangerously affected by water, due precautions shall be taken to exclude water there from;
Provided that so much of this condition as relates to precautions against the exposure of any iron or steel shall not be obligatory in a building in which no explosive other than explosive of the 1st Division 6th (Ammunition) Class is kept.
- यदि ताउट चालक का परीक्षण विस्फोटक नियंत्रक करता है तो अनुशासितारी ऐसे परीक्षण के लिए विहित फीस का संदाय करेगा यदि परीक्षण असमाधानकारी सांवित होता है तो उतनी ही फीस अनुशासितारी परीक्षण प्राप्तात्मक प्रत्येक परीक्षण के लिए फीस ऐसी किसी फीस से अधिक नहीं होगी जो किसी एक ताउट चालक के परीक्षण के लिए हर स्थिति में विहित की गई है ।
If the lighting conductor is tested by the Controller of Explosives, the licensee shall pay the fees prescribed for test. In the event of the test proving unsatisfactory, the same fees shall be payable by the licensee for each subsequent test until the lighting conductor is

passed by the testing officer as satisfactory:

Provided that the fees payable for a single test shall be charged for all tests made on a conductor during any one day:

Provided further that where two or more lighting conductors are attached to one and the same magazine, the fee for the testing of all such conductors shall not exceed the fee prescribed in this condition for testing a single lighting conductor.

10. उपयुक्त तथा जेब रहित कार्पेकरण वस्तों। उपयुक्त जूतों के प्रयोग व्यारा तथा तत्त्वात्मक लेकर या अन्यथा अपवा ऐसे किन्तु साधनों व्यारा इस बाबत सम्पर्क उपचार किया जाएगा कि फैब्रिन पारिसर में अधीरे दिग्गजताई अपवा ऐसी कोई वस्तुओं या पदार्थ जिससे विस्फोट हो सकता है या आग लग सकती हो, किन्तु इस शर्त के कारण ऐसी संरचना, स्थिति या स्वरूप में किसी कृतिम बर्ती का प्रवेश वर्जित नहीं है जिससे आग लगने या विस्फोट होने का खतरा न हो।
परन्तु इस शर्त का वह भाग जो लाहे या इस्पात के अपकर्जन को लागू होता है, ऐसे किसी भवन के संबंध में बाध्य कर नहीं होगा जिससे भिन्न कोई विस्फोटक नहीं रखा जाया है।

Due provisions shall be made, by the use of suitable working clothes without pockets, suitable shoes and by searching or otherwise or by such means, for preventing the introduction into danger area of the factory premises of fire, Lucifer matches or any substance or article likely to cause explosion or fire, but this condition shall not prevent the introduction of an artificial light of such construction, position or character as not to cause any danger of fire or explosion:

Provided that so much of this condition as applies to the exclusion of iron or steel, shall not be obligatory in a building in which no explosive other than an explosive of the 1st Division of the 6th (Ammunition) Class is kept.

11. अनुशासितारी प्रूफ्यू आर.ई.-3 और आर.ई.-4 या आर.ई.-5, जैसी स्थिति हो, में सभी विस्फोटकों का अभिलेख और लेखा रखेगा और विस्फोटक नियम, 2008 के अधीन प्राधिकृत किसी भी अधिकारी के समक्ष उसके व्यारा ऐसा करने की मांग की जाने पर स्टाक पुस्तक और अभिलेख प्रस्तुत करेगा। स्टाक पुस्तक विलिंग्रोफार्म में पृष्ठ संख्यांकित होगी।

The licensee shall keep records and accounts of all explosives in Forms RE-3 and RE-4 or RE-5, as the case may be, and exhibit the stock books and records to any of the officers authorised under the Explosives Rules, 2008 whenever such officer may call upon him to do so. The stock books in the prescribed proforma shall be page numbered.

12. पारिसरों में कोई परिवर्तन या तबदीली अनुशासित ग्राहिकारी के प्रूफ्यूमादन बिना नहीं की जाएगी और अनुशासितारी ऐसी किसी शर्त का अनुपालन करेगा जो इस नियमित अनुशासित प्राधिकारी विनियोगी करेगा।

No changes or alterations shall be carried out to the premises without prior approval of the licensing authority and the licensee shall comply with any condition that may be specified by the licensing authority in this behalf.

13. मैगजीन सभी सम्पर्क पर अच्छी मरम्मत की स्थिति में बनाई रखी जाएगी (या अच्छी हालत में बनाई रखी जाएगी) इधर किसी कारणवश किसी विस्फोटक के भूषणराज के लिए मैगजीन अनुपयुक्त हो जाती है तो अनुशासितारी इस बात की सूचना अनुशासित प्राधिकारी को तुरंत देगा।

Magazine shall at all times be kept in state of good repair (or maintained in good condition). The licensee shall report to licensing authority forthwith, if the magazine becomes unfit for storage of any explosives for any reason whatsoever.

मैगजीन का अनुशासितारी इन नियमों के नियम 24 के उपनियम 3 के अनुसार ट्रैमासिक विवरणी प्रस्तुत करेगा।

14. पर्याय सुरक्षा दूरी का कोई अधिकारण नहीं होता है तो उसकी सूचना अनुशासित प्राधिकारी को आवश्यक सालाह और कार्यवाही के लिए तुरंत दी जाएगी।

Any encroachment of the safety distance shall be immediately communicated to the licensing authority for necessary advice and action.

15. पर्याय कोई विस्फोटक विनष्ट हुआ अपवा अनुपयोगी जाया जाता है तो उसकी सूचना अनुशासित प्राधिकारी को, सलाह प्राप्त करने के लिए, तुरंत दी जाएगी।

The licensing authority shall be immediately informed for advice if any explosive is found deteriorated or unserviceable.

16. विस्फोटकों के पैकेटों के चारे दूस प्रकार लगाए जाएं कि कम से कम एक व्यक्ति भवित्वात किए गए सभी पैकेटों की हालत की जांच करने और प्रत्येक पैकेट की विनिर्माण विशेषितियों को पढ़ने के लिए उनके बीच से होकर अब जा सके।

The explosive packages shall be stocked in such a way so as to allow movement of at least one person to check the condition of all packages stored and to read the manufacture particulars of each package.

तुरंत चालकों की भूमि के लिए प्रतिरोध यांत्रिक भवन न्यूनतम होगा और किसी भी दूरी में 10 ओम्स से अधिक नहीं होगा।

The resistance of the lightning conductor to earth shall be as low as possible and in no case be more than 10 ohms.

17. मैगजीन के बारों और 15 मीटर की दूरी के अंदरांत कोई युक्त यांत्रिक धारा या छांड़ी या जलननीय सामग्री नहीं रहने दी जाएगी।

A distance of 15 meters surrounding the magazine or store house shall be kept clear of dried grass or bush or flammable materials.

18. विस्फोटकों के प्रत्येक पैकेट की, जब उसे मैगजीन के भीतर लिया जा रहा हो, ठीक दृश्य जानने के लिए परीक्षा की जाएगी।

Every package of explosive at the time of bringing inside the magazine shall be examined for its sound condition.

19. किसी मैगजीन / भंडारणगृह में किसी एक समय में चार व्यक्तियों से अधिक को नहीं रहने दिया जाएगा।

Not more than 4 persons shall be allowed inside the magazine or store house at any one time.

20. विस्फोटकों के खाली पैकेटों की शैशविशीघ्र वर्तन से अवगत होना चाहिए।

Empty packages of the explosives shall be removed at the earliest and destroyed.

21. अनुशासितारी और कर्मचारीयों को पारिसर के भीतर आपातकाल के दौरान की जाने वाली प्रक्रियाओं से अवगत होना चाहिए।

The licensee and the employee shall be conversant with procedure to be taken during the emergency within the premises.

22. निरीक्षण या नमूना अधिकारी को सभी युक्तियुक्त सम्पर्कों पर अनुबंध पारिसर में अवधि रूप से पूर्णचाने दिया जाएगा और यह सुनिश्चित करने के लिए कि अधिनियम और इन नियमों के उपर्योगी और सुरक्षा स्थितियों की सम्पर्कता, अनुपालन किया जा रहा है, अधिकारी को प्रत्येक सुविधा प्रदान की जाएगी।

Free access to the licensed premises shall be given at all reasonable times to any inspecting or sampling officer and every facility shall be afforded to the officer for ascertaining that the provisions of the Act and these rules and the safety conditions are duly observed.

23. पर्याय अनुशासित प्राधिकारी या विस्फोटक नियंत्रक अनुशासितारक को अनुशासित पारिसरों या भूमियों पर अवधि रूप से परिवर्तन करने या सिफारिशों को लाग करने को लिखित रूप में सुनित करता है जो पारिसर के अंदर या बाहर या अवक्तियों की सुरक्षा के लिए आवश्यक है, अनुशासितारक सिफारिशों को निष्पादित करेगा और विनियोगी अवधि के भीतर अनुशासित रिपोर्ट ऐसे प्राधिकारी को देगा।

If the licensing authority or a Controller of Explosives informs in writing, the holder of the licence to execute any repairs or to make any additions or alterations to the licensed premises or machinery, tools or apparatus or carry out recommendations, which are in the opinion of such authority may pose unacceptable risk and so necessary for the safety of either on-site or off-site of the premises or persons, the holder of the license shall execute the recommendations and report compliance within the period specified by such authority.

24. अनुशासितारी मैगजीन में रखने और विकी के लिए प्राधिकृत विस्फोटक सूची में उल्लिखित अनुबंध फैक्टरी या कंपनी से प्राधिकृत विस्फोटक आतिशबाजी या सुरक्षा परीक्षा लियी जाएगी।

कृपया यह नुस्खा प्राधिकारी विस्फोटक विनियोगी को दें।


The licensee shall purchase authorised explosives/ fireworks or safety fuse as mentioned in the list authorised explosives from a licensed factory or company for possession and sale from the magazine.

25. निम्न से अधिक धनि सार उत्पादित करने वाले आतिशबाजियों पटाखों की विक्री और रखने के लिए -
(क) जो फटने की जगह से चार मीटर की दूरी पर है, 125 डी.बी.(ए) या 145 डी.बी.(सी)पी.के. प्रतिवर्षित होगी;
(ख) शूलुला (जुड़े हुए पटाखे) को गठन करने वाले व्यक्तिगत पटाखों के लिए उपर्युक्त उल्लिखित सीमा 5 लॉग10(N) डी.बी. (सी)पी.के.प्रतिवर्षित होगी;
The possession and sale of fire-crackers generating noise level exceeding:
a) 125 dB(A) or 145 dB(C)pk at 4 meters distance from the point of bursting shall be prohibited;
b) For individual fire-cracker constituting the series (joined fire-crackers), the above mentioned limit be reduced by $5 \log_{10}(N)$ dB, where N = number of crackers joined together.


26. आग या विस्फोट ब्दारा दुर्घटना या नुकसान पटाखों की कमी या चोरी, तुरंत पास के पुलिस धाने और अनुज्ञापन प्राप्तिकारी और अनुज्ञापन Accidents by fire or explosion and losses, shortage or theft of explosives shall be immediately reported to the nearest police station and the licensing authority and local office of the licensing authority.

आतिरिक्त शर्तें / Additional Conditions :

1. अनुज्ञाप्तीधारी विदेशी भूल के आतिशबाजी को ना प्रदर्शित करेगा, ना रखेगा और ना ही उसकी विक्री करेगा। The licensee shall not exhibit, possess and sell fireworks of foreign origin.


कृते संयुक्त मुख्य विस्फोटक नियंत्रक
For Joint Chief Controller of Explosives
दक्षिणाचल, देवै | South Circle, Chennai

Note :- This is system generated document does not require physical signature. Applicant may take printout for their records.



कृते उप मुख्य विस्फोटक नियंत्रक
For Deputy Chief Controller of Explosives
एरनाकुलम, Ernakulam


Form DE-2
(See rule 113 of the Explosives Rules, 2008)
(Distance Form to be attached to the licence)

Safety distances required to be kept clear around magazine for high explosives or fire works or factory licence number E/SC/KL/22/1734(E72220) in form LE-3 granted to George Kohuparambil,Proprietor, M/s. United Granites & Metals, Vazhithala P.O., Thodupuzha, Kerala-685588.

Type of Structure(s)		Safety distances meters	
Inside Safety Distances(USD)			
1	Room or Workshop used in Connection with the Magazine	M	U/M
2	Any other Explosives Magazine or store House or Factory of the Applicant	16	24
3	Magazine Office		
Middle Safety Distances(MSD)			
4	Magazine Keeper's or Chowkidar's Dwelling house		
5	Railway including Minerals and Private Railways		
6	Canal (in active use) or other navigable water		
7	Dock or Pier or Jetty		
8	Public Highway or Public Road		
9	Private Road which is PRINCIPAL means of access to a Temple, Mosque, Church, Gurudwara or other places of worship, Hospital, College, School or Factory		
10	River Embankment or Sea Embankment or Public Well		
11	Reservoir or Bounded tank/ope way		
12	Windmill or Solar panel for Power Generation		45
Outside Safety Distances(OSD)			
13	Dwelling House		
14	Govt. and Public Building		
15	Temple, Mosque, Church or Gurudwara or other Places of Worships		
16	Shops, Market place, Public recreation and Sports Ground, College, School, Hospital, Theater, Cinema or other Building where the public are accustomed to assemble		
17	Factory		
18	Buildings or Works used for the Storage in Bulk of Petroleum, Spirit, gas, or other inflammable or hazardous substances		
19	Building or Works used for Storage and Manufacture of Explosives or of articles which contain Explosives		68
20	Aerodrome		
21	Furnace, Kiln or Chimney		
22	Quarry or mine pit head		
23	Power House or Electric Substation		
24	Wireless Station		
25	Warehouse or other Storage Building		
26	Any other Protected works		
Overhead Electric lines			
27	Electric Power over head Transmission Lines above 440V	68	
28	Electric Power over head Transmission Lines upto 440V	15	

The Date : 01/04/2015


For Joint Chief Controller of Explosives
South Circle, Chennai


For Deputy Chief Controller of Explosives
Ernakulam

Amendments :

- Amendment of Quantity of Explosives/Monthly Purchase Limit dated : 25/09/2017
- Amendment of Quantity of Explosives/Monthly Purchase Limit dated : 09/11/2017
- Amendment of Quantity of Explosives/Monthly Purchase Limit dated : 20/03/2018
- Amendment of Quantity of Explosives/Monthly Purchase Limit dated : 23/03/2018
- Amendment of Quantity of Explosives/Monthly Purchase Limit dated : 29/06/2018

Note :- This is system generated document does not require physical signature. Applicant may take printout for their records.



भारत सरकार | Government of India
 वाणिज्य एवं उद्योग मंत्रालय | Ministry of Commerce & Industry
ऐतरीफी तथा विस्तृत सुरक्षा बोर्ड (पीएसो) | Petroleum & Explosives Safety Organisation (PESO)
 वृक्ष-वाणिज्य मंत्रालय | Ministry of Petroleum & Explosives
 अधीक्षण नं. विवरण | Form No. : PESO/DR/2017/01/001
 28 अक्टूबर २०१८ | २८ October 2018
 विवरण नं. | Application No. : 28/Mod/DR/2018/000000
 विवरण नं. | Application No. : 28/Mod/DR/2018/000000
 विवरण नं. | Application No. : 28/Mod/DR/2018/000000

અધ્યક્ષ વિભાગ | લિસ્ટનંબર: A/SC/2023/03/04/2264

प्रियकाश | Date: 10/06/2024

मीट नं १८
सं. GEORGE EDICAL PARISH
KOCCHUMMALLI HOUSE, KIZHAKKAL P.O. THODUKKU/PGODUKKU DISTRICT
DIST. ERnakulam, S. Karthik. Phone: 485331

विषय / Subject: अमेरिकन निस्टिक नियम, 2012 के प्रत्य २-३ विविध कार्यकारी नियमों (एनएनी) के बुल गोदाम में, अमेरिकन निस्टिक के उपरी के लिए, रजो है अनुमति -
Approval of Quality of American Nistic
Approval of Quality of American Nistic
Approval in Different Facilities/Premises
Licence to possess for use of American Nistic from a store house attached to engineers manufacturing oil (ANFO) grain as per Part २-३ of American Nistic, 2012
Approval of Quality of American Nistic
Change in Postal Address
Approval in Different Facilities/Premises

2002-150

कृतित दूरध्वांश विषय पर आपके दिनांक 14/06/2004 के पत्र संख्या 123121 का संग्रह लगा करें।
Please refer to your letter No. 123121 dated 14/06/2004 on the subject cited above.

एन्सीसी लाइसेन्स नं. A5C6L3914(A2264) विविध संस्करण की तरह।
The License No. A5C6L3914(A2264) is duly extended in respect of

and forwarded herewith.

Quantity of Ammonium Nitrate
उत्तरीक वे अम्मोनियम नायट्रायट जो ही प्रयोग
Change in Postal Address as above
प्रतिक्रिया तथा लिपिबद्ध विवर

पद्धति Series None Explosives	प्रतिमात्रा की मात्रा Capacity Per Batch	इकाई Unit
1. Ammonium Nitrate (500g)	10000	Kg

२५ अप्रृष्ट अनुमति अवधि तारीख तक वैधी :
This license shall remain valid till 31st day of March 2017

कागज अनुमति के लिए अपनी नीकनां हुए अधिकारी नामांकन प्राप्त करें। अधिकारी नामांकन प्राप्त करने की प्रक्रिया का विवरन निम्नांकित है।

कृपया इस पर्याप्ति की पालनी की ।

WILSON / Echolotins

क्रांती एवं कानूनी गम । १। Dr. T. L. THANEINGAM
संसद एवं राजनीतिक विषय । १। शास्त्रीय चौक चौक चौक चौक चौक

1. ദുർ മുൻ റിക്വിസിറി നിരീക്ഷ കോർട്ട് | The Dy. Chief Controller of Explosives, Kochi.
2. ദിക്ഷ മാസ്റ്റർ, IDCR33, Kerala കു മുൻ കാര്യാലയം | E2.59676/12/K.Dh.3011/2011 | District Magistrate, IDCR33, Kerala with reference to his Stat No: E2.59676/12/K.Dh.3011/2011.
3. ദിക്ഷ മാസ്റ്റർ, IDCR33, Kerala | Government of Kerala, Office, IDCR33, Kochi.

कृति शुभा युवा विद्यालय | Local Child Council of Exposition
पर्यावरण, बैठी | Sohna Circle, Gurgaon

Note :- This is system generated document does not require physical signature. Applicant may take printout for their reference.

Digitally signed by Dr T L THANH LINH GAM
Reason: Licence No.: A/SC/KL/P3/14

अनुमति प्राप्ति P-3
(अमोनियम नाइट्रेट नियम, 2012 की अनुसूची 1 की क्रम संख्या-3 और नियम 35 देखें)

LICENCE FORM P-3
(See Sr.No.-3 of Schedule I and rule 35
of Ammonium Nitrate Rules,2012)

विस्कोटक विनिर्माण इकाई (एनएफओ) से जुड़े गोदाम से, अमोनियम नाइट्रेट के उपयोग के लिए, रखने हेतु अनुमति
Licence to possess for use of Ammonium Nitrate from a store house attached to explosives manufacturing unit (ANFO)

अनुमती संख्या | Licence No. : A/SC/KL/P3/14(A2264)
वार्षिक अनुमती शुल्क | Annual licence Fee Rs : 100/-



अनुमति संख्या | Licence No. : A/SC/KL/P3/14(A2264)
वार्षिक अनुमती शुल्क | Annual licence Fee Rs : 100/-

Shri GEORGE KOCHUPARAMBIL (अधिकारी : GEORGE KOCHUPARAMBIL)
KOCHUPARAMBIL HOUSE, VAZHITHALA P.O, THODUPUZHA
काश्यकारी संचयन संस्थान | KASHERI SANCHAYAN SANGHAYAN
क्षेत्र : IDUKKI, राज्य : Kerala, पिन कोड : 685583
फोन : -, Email : unitedgranitesandmetals@gmail.com, फैक्स : -

1. अनुमतिप्राप्ति का स्तर: Proprietorship Firm

Status of licence holder: Proprietorship Firm

2. अनुमति केवल विनिर्माण इकाई (एनएफओ) से जुड़े गोदाम से, अमोनियम नाइट्रेट के उपयोग के लिए, रखने हेतु अनुमति

Licence is valid only for the following purpose : Licence to possess for use of Ammonium Nitrate from a store house attached to explosives manufacturing unit (ANFO)

3. अनुमति अमोनियम नाइट्रेट की नियंत्रिति मात्रा के लिए हैप है :

Licence is valid for the following quantity of Ammonium Nitrate:

नाम तथा विवरण Name and Description	किसी एक समय में मात्रा (कि.ग्रा.) Quantity at a time (Kg.)	किसी एक वित्तीय वर्ष में कार्य की जाने वाली अमोनियम नाइट्रेट की मात्रा (कि.ग्रा.) Quantity of Ammonium Nitrate to be purchased in a financial Year (Kg.)
Ammonium Nitrate (Solid)	30000	360000

4. अनुमति परिसर नियंत्रित आरेखपाई के अनुसार होगा

The licensed premise shall conform to the following drawing(s):

अरेखण संख्या | Drawing No : A/SC/KL/P3/14 (A2264) | विनायक | Dated : 10/06/2024

5. अनुमति परिसर नियंत्रित पारे पर दिया है :

The Licensed premises are situated at following address:

Survey No. 359, Block No.11, शाहरुगांव | Town/Village : Massakkadu
पुलिस स्टेशन | Police Station : Thodupuzha | जिला | District : Idukki राज्य | State : Kerala
पिन कोड | PinCode : 685588फोन | Phone : फैक्स | E-Mail : फैक्स | Fax : -

6. अनुमति परिसर में नियंत्रित कुरायारी उपलब्ध है :

The licensed premises consist of following facilities :

कॉस्ट ऑफ ऑरे ब्रॉडवे

7. अनुमति, समय, समय पर यापा विनियम 1884, एवं उसके अधीन बनाए गए अमोनियम नाइट्रेट नियम, 2012 की वार्ता, अतिरिक्त वार्ते तथा नियंत्रित उपबन्ध के अधीन जारी की जाती है

(i) अनुमति क्रम संख्या 3 में नियंत्रित अरेखण (विवरण व्यापक दर्शाए गए हैं)।

(ii) अनुमति जारी करने वाले आधिकारी द्वारा हस्ताक्षर अनुमति की जाने वाले अतिरिक्त वार्ते।

The licence is granted subject to the provision of Explosives Act 1884 as amended from time to time and the Ammonium Nitrate Rules, 2012 framed there under and the conditions, additional conditions and Annexures.

(i) Drawings (showing site, constructional and other details) as stated in serial No. 5 above.

(ii) Conditions and Additional Conditions of this licence signed by the license issuing authority.

8. यह अनुमति 31 मार्च 2022 तक वैध रहेगी।

This licence shall remain valid till 31st day of March 2022

यह अनुमति विस्कोटक अधिनियम, 1884 या उसके अधीन बनाए गए अमोनियम नाइट्रेट नियम, 2012 या इस अनुमति की किसी वार्तों का उल्लंघन करने पर या यदि अनुमति परिसर, अरेखण और उससे संलग्न उपावद्ध में दर्जी

प्रिवाट क्षेत्र के अनुसार नहीं यापा जाने पर नियंत्रित या प्रतिरोध की जा सकती है।
This licence is liable to be suspended or revoked for any violation of the Explosives Act 1884 or Ammonium Nitrate Rules, 2012 framed there under or the conditions of this license, if the licensed premises are not found conforming to the description shown in the plans and annexure attached hereto.

दिनांक | Date: 09/11/2017

संयुक्त मुख्य विस्कोटक नियंत्रक
Joint Chief Controller of Explosives
दक्षिणाचाल, चैत्री | South Circle, Chennai

Amendments :

- Change in Postal Address dated : 10/06/2024
- Amendment in Drawings/Facilities/Premises dated : 10/06/2024
- Amendment of Quantity of Ammonium Nitrate dated : 10/06/2024

Transfers :

- Change in Licensee Name/Address/Status dated : 10/06/2024
- Change in Licensee Name/Address/Status dated : 10/06/2024
- Change in Licensee Name/Address/Status dated : 10/06/2024

अनुमति वर्तीकरण के लिए पूछाकर्ता : Endorsement for renewal of licence:

वर्तीकरण की तारीख Date of Renewal	समाप्ति की तारीख Date of Expiry	अनुमति प्राप्तिकारी के हस्ताक्षर Signature of licensing authority
01/02/2022	31/03/2027	Sd/- Dy. Chief Controller of Explosives, Erode

प्राविधिक वेतावती : अमोनियम नाइट्रेट कानून का दुर्लभ्योग कानूनी तौर पर गंभीर दण्डनीय अपराध है।
Statutory Warning : Misuse of Ammonium Nitrate shall constitute serious criminal offence under the law.

Note :- This is system generated document does not require physical signature. Applicant may take printout for their records.

Digitally signed by Dr T L THANULINGAM
Reason: Licence No. : A/SC/KU/P3/14
Location: Chennai (A2264)
Date: 15-06-2024 17:20:58 PM

Conditions

मुख्य विस्तृट नियंत्रक / या विस्तृट नियंत्रक द्वारा प्रदत्त प्रकार P-3 में विस्तृट विनियोग इकाई (एनएफओ) से जुड़े गोटाम से, अबोनियम नाइट्रो के उपयोग के लिए, रसायन हो जाएगी, अनुप्रयोग संस्था A/SC/KL/P3/14(A2264) को शामि नियोजित है।

The following are the conditions of licence number A/SC/KL/P3/14(A2264) to Licence to possess for use of Ammonium Nitrate from a store house attached to explosives manufacturing unit (ANFO) in Form P-3 granted by the Chief Controller or Controller of Explosives.

1. अमोनियम नाईट्रेट का खट्टारान अनुकूलिये के साथ संतुष्ट अनुमति अधिकारी में दर्शय गए अनुकूल गोदाम या मैट खट्टारान टैक में नी किया जाएगा। The Ammonium Nitrate shall be possessed only in the licensed storage or melt storage tank shown in the approved plan attached with the License.
2. अमोनियम नाईट्रेट की मात्रा परामर्श, या या उत्तर किसी भी प्राप्त, अनुकूल गोदाम, विक्री का एक साथ में, से अधिक नहीं होनी चाहिए। The quantity of Ammonium Nitrate in the premises or any part thereof shall not exceed at any one time the quantity for which License has been issued.
3. उत्तर का एक अधिक अमोनियम नाईट्रेट को एकत्र कर अनुकूलियतों द्वारा नियंत्रित किया जाना चाहिए एक नियंत्रित किया गए अमोनियम नाईट्रेट की मात्रा को तेजोवृत्त रखा जाएगा। Spilled or sweepings of Ammonium Nitrate the waste Ammonium Nitrate collected from sweeping or spilled shall be destroyed by the License holder and account thereof shall be maintained indicating the quantity of the Ammonium Nitrate destroyed.
4. अनुकूलियती और विनियोग हथा संपरीकरण के लिए परामर्श में नियुक्त प्राक्तन अधिकारी को विनियोग तथा संपरीकरण के लिए अनुकूल गोदाम में अति वा विस्फोट से दूरी बर्ती द्वारा से बरात तथा विनियोग तथा संपरीकरण के लिए अनुकूल परामर्श में अनुकूल अधिकारी के प्रबोग से बरात के लिए पूर्ण सावधानी बर्ती होनी चाही रहे ऐसी विक्री भी प्राप्त कर से परिवर्तन करना होना जो अति वा विस्फोट का कारण बने एवं या विनियोग तथा संपरीकरण परामर्श में कार्य के उद्देश्य से अवधारण क न हो। The License holder and every person employed shall take all due precautions for prevention of accidents by fire or explosion in the licensed premises and for preventing unauthorized person from having access to licensed premises and shall abstain from any act from whatsoever which tends to cause or explosion and is not reasonably necessary for the purpose of works related thereto.
5. मूल विस्फोट विवरक या अनुकूल प्राक्तनी की पूरी विविधता सूचीकृत के लिए अनुकूल परामर्श में किसी भी प्राक्तन का परिवर्तन एवं परामर्शन नहीं किया जाएगा। मूलिकता के लिए इस प्राक्तन के परामर्शन एवं परामर्शन अनुकूलीन से स्पष्ट संस्करण अधिकारी द्वारा दिया जाएगी। No additions and alterations shall be carried out in the licensed premises without a previous sanction in writing of the Licensing Authority. Such additions and alterations so sanctioned shall be shown in the amended plan attached to the License.
6. अनुकूलियताकाल द्वारा विनियोग तथा संपरीकरण प्राक्तन के परिवर्तन एवं कार्या का संबलन इन नियमों के अनुकूल करने हेतु एक योग्य एवं सुधार व्यक्ति नियुक्त किया जाएगा। The License holder shall appoint a competent person to supervise the operations shall be conducted under the supervision of the competent person.
7. किसी नियंत्रित अधिकारी या नमूने हेतै वारे अधिकारी को अनुकूल परामर्श में पूर्विकृत समय पर बरात अवास पूर्ण प्रदान की जाएगी और ऐसे अधिकारी को वे सभी सूचीकृत उपलब्ध जो जाएं जिससे कि वह सुनिश्चित कर सके कि अधिकारियम और इन नियमों के उपरांत एवं सुधार सभी शर्तों का साक्षर रूप से पालन किया जाएगा। Free access to the licensed premises shall be given at all reasonable times to any inspecting or sampling officer and all facilities shall be offered to the officer for ascertaining that the provisions of the Act and their rules and the safety conditions are duly observed.
8. पूरी विविधिकारी के विविधिएं अनुकूलियती को विविधते में अधिकारी परामर्श में कार्य संबलन या कोई परिवर्तन या परामर्शन या दैवी विविधिकारी को विविधित करने के लिए, जो ऐसे अधिकारी की दरमान जीविकार्य लेंदियु उत्तर कर सकती है और इस प्रकार यह परामर्श के बाहर या भौतिक या अधिकारी की सुधार के लिए अवश्यक है, सूचीकृत करते हैं या अनुकूलियती उन विविधियों को विविधित करना और ऐसे विविधिकारी द्वारा नियंत्रित अवधारण में अनुकूल रूप से प्रतिष्ठित हो। If the License issuing authority or the inspecting officer informs in writing, the holder of the License to execute any repeals or to make any additions or alterations to the licensed premises or carry out recommendations, which are in the opinion of such authority may pose unacceptable risk and therefore the same is necessary for the safety or security of the premises or persons, the holder of the License shall execute the recommendations and report compliance within the period specified by such authority.
9. अंति या विस्फोट से सुनें वाली दुरुप्रीतीयों और अमोनियम नाईट्रेट की हानि, उपर्युक्त कीमी या सूची के सूचना निकटतम पुलिस स्टेबल और विविधिकारी के स्थानीय कारबोल को दिया जाएगा। Accidents by fire or explosion and losses, shortage or theft of Ammonium Nitrate shall be immediately reported to the nearest police station and the District Authority.
10. अनुकूलियताकाल भौतिक भा. भा. 3 में विविधिएं प्रदूषण में निकाल अनिवार्य रूपीय विविधियों के आधिकारियम नाईट्रेट के लिए उत्तराधिकारि नियुक्त कर उनकी प्रधान कर सूची भी साथे एवं नियम 50 में विविधिकारी द्वारा दिया जाएगा। License holder shall maintain records in the prescribed forms specified in Schedule II Part 3 to ensure accountability, identification and traceability of Ammonium Nitrate and shall produce such records on demand to authority specified in rule 50.
11. अनुकूलियती, अनुकूलीन भा. भा. 3 में विविधिकारी द्वारा दिया जाएगा अधिकारी को नासिक विविधियों द्वारा प्रकार प्रेसित करोगे कि वह प्राप्तेक आगामी ग्रन्तीने की 10 दिनों तक अनुकूल प्राक्तनी को विविधिकारी को प्राप्त हो जाए। The License holder shall submit monthly returns of AN received, sold /used/stolen or short received and destroyed in the form prescribed in Form R-9 of Part 3 of Schedule II as to reach Licensing Authority and District Authority within 10th day of every succeeding month.

कृति संयुक्त मुख्य विस्तोरक नियंत्रक
दस्तिवाचार, वैत्री

State Circle, Central

दूसरी तरफ दूसरी विभागीय विभाग
For Deputy Chief Controller of Explosives
दूसरी विभागीय विभाग



भारत सरकार | Government of India

वाणिज्य और उद्योग मंत्रालय | Ministry of Commerce & Industry
 पेट्रोलियम तथा विस्फोटक सुरक्षा बोर्ड (पीएओ) | Petroleum & Explosives Safety Organisation (PESO)
 पूर्व नाम: विस्फोटक विभाग | formerly- Department of Explosives
 A और D - इन, घासी 1-3, दूसरा तला, शास्त्री भवन | A & D - Wing, Block 1-3, 2nd Floor, Shastri Bhavan
 26 हास्कूल से दीर्घ, नॅगमलक्कम तेज़ी | 26 Haskool Road, Nangamakkam Chennai 600006
 फ़ोन (Phone): 28281023 | फैक्स (Fax): 28284848

संख्या (No.): E/SC/KL/38/21(E98818)

दिनांक (Date): 11/06/2024

संदेश में | To,

Shri GEORGE KOCHUPARAMBIL,
 KOCHUPARAMBIL HOUSE, KUZHITHALA P.O/THODUPUZHAI/IDUKKI DISTRICT, Town/Village - KUZHITHALA
 District-IDUKKI, State-Kerala, Pincode - 685583

विषय : Survey No.359,BLOCK NO:II, ग्राम Mankkada (v), Thodupuzha Taluk, Kollam IDUKKI, राज्य Kerala में सेवार्थ Shri GEORGE KOCHUPARAMBIL, इसी दण्डों विस्फोटक के एकांक में विस्फोटक नियम, 2008 के अनुसार LE-1 में जारी अनुमति में E/SC/KL/38/21(E98818) के संशोधन मंदिर में (विस्फोटक की मात्रा में वैरिएटन डाक पाते में वैरिएटन अवैरिएटन सुनिश्चालन/परिवर्तन में वैरिएटन)

Subject: Manufacturing of ANFO situated at Survey No.359,BLOCK NO:II, Mankkada (v), Thodupuzha Taluk, Dist. IDUKKI, Kerala - Licence No: E/SC/KL/38/21(E98818)
 granted in Form LE-1 of Explosives Rules, 2008 -
 (Amendment of Quantity of Explosives Change in Postal Address Amendment in Drawings/Facilities/Premises).

महोदय | Sir,

आपका उपर्युक्त लिखित पात्र पद संख्या 123/125 दिनांक 10/06/2024 का संदर्भ प्रहल लाएँ।
 Please refer to your letter no. 123/125 dated 10/06/2024.

अनुमति संख्या E/SC/KL/38/21(E98818) विस्फोटक की मात्रा में वैरिएटन डाक पाते में वैरिएटन अवैरिएटन / सुनिश्चालन/परिवर्तन में वैरिएटन के संदर्भ में यह संशोधित कर भेजी जा रही है।
 The Licence No. E/SC/KL/38/21(E98818) is forwarded herewith duly amended in respect of following:

Quantity of Explosives Change in Postal Address as above Drawings/Facilities/Premises

किसी भी एक समय में तात्पुरता क्षमता निम्नलिखित की तात्पुरता से अधिक नहीं होगी।
 The licence capacity at any one time shall not exceed the kinds and quantities mentioned below :

संख्या No	विस्फोटक Explosive(s)	क्रमी Class	प्रभाग Div	उप-प्रभाग Sub Div	क्षमता Capacity	इकाई Unit
1	ANFO	2	0	0	100	Kg

यह अनुमति दिनांक 31 मार्च 2027 तक प्रयुक्त रहेगी।
 This Licence shall remain valid till 31st day of March 2027.

अनुमति के आगामी नवीनीकरण द्वारा वृद्धि की जाने वाली विस्फोटक नियम, 2008 के नियम 112 के अनुरूप प्रक्रिया का पालन करें। कृपया जाली है।
 For further re-validation(if required), please follow the procedure under Rule 112 of Explosives Rules, 2008. Receipt of this letter may please be acknowledged.

महोदय | Your's faithfully

(डॉ. टी. ल. तानुलिङ्गम | Dr. T. L. THANULINGAM)
 संयुक्त मुख्य विस्फोटक नियमक | Joint Chief Controller of Explosives

दिविणीवाल, चेत्रे | South Circle, Chennai

प्रतिलिपि प्रेसिटा | Copy Forwarded to:

1. उप मुख्य विस्फोटक नियंत्रक छाली
 The Dy. Chief Controller of Explosives, Kochi
2. दिविणीवाल, IDUKKI, Kerala with reference to his No: 2012/5076/6 and 2013/8896/6 Dated: 30/11/2013.
3. Superintendent of Police, IDUKKI, Kerala.

संयुक्त मुख्य विस्फोटक नियमक | Joint Chief Controller of Explosives
 दिविणीवाल, चेत्रे | South Circle, Chennai

(अधिक जानकारी जैसे अवैदेन की सिंहि, यूक्त अधि के लिए हमारी वेबसाइट <http://peso.gov.in> हैं।)
 (For more information regarding status, fees and other details please visit our website <http://peso.gov.in>)

Note :- This is system generated document does not require physical signature. Applicant may take printout for their records.

Digitally signed by Dr T L THANULINGAM
 Reason: Licence No. : E/SC/KL/38/21
 Location: Chennai | E98818

(सेट III | Set III)

मुख्य विस्फोटक नियंत्रक या विस्फोटक नियंत्रक व्यापार अनुदात प्रकृत्या एत है । [अनुच्छेद (४) में पु.एन.एफ.ओ. विस्फोटकों के विनियोजन के लिए अनुमति नं. E/SC/KL/38/21(E98818) की दाता निश्चित है ।
The following are the conditions of licence number E/SC/KL/38/21(E98818) for manufacture of ANFO explosives in Form I.E-I [article 1(d)] granted by Controller or Cocontroller of Explosives.

- परिसर या उसके किसी भाग में एनएफओ विस्फोटकों की मात्रा किसी एक समय में उस मात्रा से अधिक नहीं होगी, जिसके लिए अनुमति दी गई है ।
The quantity of ANFO explosives in the premises or any part thereof shall not exceed at any one time the quantity for which licence has been issued.
- एनएफओ विनियोजित शेड को 15 मीटर की दूरी पर बाड़ तगा कर संरक्षित किया जाएगा और वह अनुसूची- VIII की सारणी I में परिविनियोजित संरक्षित रूकड़ों से सुरक्षा दूरी बनाए रखेगा ।
The ANFO manufacturing shed shall be protected by a fencing at a distance of 15 metres and it shall maintain safety distance from protected works as specified in table I of Schedule VIII.
- शेड में कार्य कराई में अधिकारित सुरक्षाकार्य प्रक्रियाओं और अनुदेशों के अनुसार किया जाएगा ।
Work in the shed shall be carried out strictly in accordance with the laid down safe working procedures and instructions.
- एनएफओ विस्फोटकों को विनियोजित अनुबंधितारी व्यापार नियुक्त किसी अधिकत उत्तरदायी व्यक्ति के सीधे परिविनियोजित किया जाएगा ।
The ANFO explosives shall be manufactured under the immediate supervision of a qualified responsible person appointed by the licensee.
- अनुबंधितारी और प्रत्येक नियोजित व्यक्ति उस स्थान या उन स्थानों में जहाँ एनएफओ विस्फोटकों का विनियोजन किया जाता है या देखभाल की जाती है या प्रयोग किया जाता है, अग्रि या विस्फोटक के कारण होने वाली दुर्घटनाओं को रोकने के लिए सभी सम्यक पूर्वाधारणा दरवाजे ।
The licensee and every person employed shall take all due precautions for the prevention of accidents by fire or explosion, in the place or places where the ANFO explosives is manufactured, handled or used.
- एनएफओ विस्फोटकों के सभी अवश्यकों को एकत्रित किया जाएगा और अनुभवी व्यक्ति के पर्योक्षण के अधीन अनुबंध परिसर से दूर किसी सुरक्षित स्थान में नहीं किया जाएगा ।
All spillage of ANFO explosive shall be collected and destroyed at a safe place away from the licensed premises under the supervision of experienced person.
- एनएफओ विस्फोटकों के विनियोजन के लिए प्रयुक्त आधानों और मिश्रणों को प्रयोग के पश्चात उपयुक्त डिटरजेंट धोत से अच्छी तरह साफ किए जाएंगा और जल से धूया जाएगा ।
All containers and mixers used for manufacturing the ANFO explosive shall after use, be thoroughly cleaned with suitable detergent solution and washed with water.
- अनुबंधितारी और कर्मचारी परिसर के भीतर अपात के दौरान की जानेवाली प्रक्रिया से अवगत होंगे ।
The licensee and the employee shall be conversant with procedure to be taken during the emergency within the premises.
- किसी नियोजित या अनुबंध लेने वाले अधिकारी को सभी पूर्वाधारणा सम्बन्धी पर अनुबंध परिसर में अवध पहुंच प्रदान की जाएगी और वह अधिनियम करने के लिए कि अधिनियम और इन नियमों के उपबंधों या सुरक्षा संबंधी शर्तों का सम्यक रूप से पालन किया जाता है, उस अधिकारी को प्रत्येक सुविधा उपलब्ध करवाइ जाएगी ।
Free access to the licensed premises shall be given at all reasonable times to any inspecting or sampling officer and every facility shall be afforded to the officer for ascertaining that the provisions of the Act and these rules and the safety conditions are duly observed.
- पादि अनुबंधान प्राधिकारी या विस्फोटक नियंत्रक लिखित में अनुबंधित पारक को अनुबंध परिसर या मध्याननी, औजारों या साधितों में कोई मरम्मत या कोई परिवर्तन या परिवर्तन करने के लिए या ऐसी सिफारिशों या क्रियावित करने के लिए, जो लिखित प्रदर्शित कर सकती है और परिसर या व्यक्तियों की स्थल पर या स्थल से बाहर सुरक्षा के लिए अवश्यक है, सूचित करता है जो अनुबंधित पारक उन सिफारिशों को निष्पादित करेगा और ऐसे प्राधिकारी द्वारा विनियोजित अवधि के भीतर अनुपातन की रिपोर्ट देगा ।
If the licensing authority or a Controller of Explosives informs in writing, the holder of the licence to execute any repairs or to make any additions or alterations to the licensed premises or machinery, tools or apparatus or carry out recommendations, which are in the opinion of such authority may pose unacceptable risk and so necessary for the safety of either on-site or off-site of the premises or persons, the holder of the license shall execute the recommendations and report compliance within the period specified by such authority.
- अग्रि या विस्फोट के कारण होनेवाली दुर्घटनाओं और विस्फोटकों की हानि, कमी या वोही के बारे में निकटतम पुलिस स्टेशन और अनुबंधान प्राधिकारी द्वारा व्यावनीय कार्यालय में तुरंत रिपोर्ट की जाएगी ।
Accidents by fire or explosion and losses, shortage or theft of explosives shall be immediately reported to the nearest police station and the licensing authority and local office of the licensing authority.

एक्सी अम

कृते संयुक्त मुख्य विस्फोटक नियंत्रक
For Joint Chief Controller of Explosives
दक्षिणाचल, चेन्नई | South Circle, Chennai

Note :- This is system generated document does not require physical signature. Applicant may take printout for their records.

For Deputy Chief Controller of Explosives
एक्सी अम, Ernakulam

Annexure-13

KSPCB LICENSE

(CONSENT TO OPERATE)



KERALA STATE POLLUTION CONTROL BOARD

FILE NO. : KSPCB/ID/ICO/10068772/2024

Date of issue : 12-07-2024

INTEGRATED CONSENT TO OPERATE - RENEWAL

Consent No : KSPCB/ID/ICO/10068772/2024

Valid up to : 15 / 07 / 2029

Ref:

1. Your online application no 10068772 dated 14.05.2024
2. Consent no R18IDUCTOR446677 dated 10.08.2021 valid up to 15.07.2024

The Integrated Consent to Operate issued as per reference above to **Sri.GEORGE KOCHUPARAMBIL, QUARRY OF UNITED GRANITES & METALS , VAZHITHALA P.O THODUPUZHA** is hereby renewed up to **15.07.2029** and issued to **Sri GEORGE KOCHUPARAMBIL , KOCHUPARAMBIL HOUSE VAZHITHALA P.O MANAKKAD.**

The consent(s)/ variation order(s) cited under reference are integral part of this renewal order and this order is subject to the conditions stipulated therein and the following modifications/ additions.

1. GENERAL

SL NO.	ITEM	DESCRIPTION
1	VALIDITY	01.03.2028
2	CATEGORY	RED
3	CAPITAL INVESTMENT	Rs.1200.00 Lakhs
4	ANNUAL FEE	Rs.81000/-
5	FEE REMITTED	Rs.405000/-

6	OCCUPIER	Sri George Kochuparambil Kochuparambil House Vazhithala P.O Manakkad
---	----------	--

2.CONDITIONS AS PER The Water (Prevention and Control of Pollution) Act, 1974

2.1 In case of generation of trade effluent from the industry, effluent treatment system consisting of treatment units having adequate capacity shall be made functional before commissioning. Additional facilities required, if any, to achieve the standards laid down by the Board u/s 17(1) (g) of the Water Act shall also be made alongwith.

3.CONDITIONS AS PER The Air (Prevention and Control of Pollution) Act, 1981

3.1 Adequate air pollution control measures shall be provided before commissioning of the industry. Additional facilities required, if any, to achieve the standards laid down by the Board shall also be made along with.

4.CONDITIONS AS PER The Environment (Protection) Act, 1986.

4.1 The operation of the industry shall be strictly in compliance with the provisions of the Noise Pollution (Regulation and Control) Rules 2000.

4.2 Used batteries shall be disposed of as per the Batteries Waste Management Rules, 2022

4.3 Hazardous waste generated, if any, shall be handled as per the Hazardous and Other Wastes (Management and Transboundary Movement) Rules, 2016

5. SPECIFIC CONDITIONS

5.1. This consent is granted subjected to the power of the Board to review and make variations in all or any of the conditions as per section 21 (6) of the Air Act 1981 and Section 27 of Water Act 1974.

5.2 This consent is a renewal of Consent No.: R18IDUCTOR446677 dated 10.08.2021 and is granted on the basis of the particulars, affidavit and other documents furnished by the applicant. If the statement furnished in the affidavit/document is found false or in the case of noncompliance of integrated consent to operate conditions the consent issued will be withdrawn/cancelled

5.3 For renewal of the consent in case of continuance of discharge/operation of the industry, application in the prescribed form shall be submitted through the web portal of the Board 2 months prior to the date of expiry. Late application will be accepted only with fine.

5.4 No change or alteration of the unit is to be made without the prior permission of the Board. Any change in the particulars furnished in the references or in the identity of the occupier / authorised agent is to be intimated to the Board forthwith.

5.5 The applicant shall comply with the instructions that the Board may issue from time to time regarding prevention and control of air, water and sound pollution.

5.6. This consent is granted based on the Environmental clearance issued from SEIAA vide No.1137/EC/SEIAA/KL/2017 Dated 02.03.2023 for 12. 2987 Ha in survey no 354/4,354/5,355/1pt, 351/1 pt,350,352/1 pt .The quarrying shall be done after obtaining all statutory/necessary clearances from concerned authorities and is valid only when all other clearances from other concerned

authorities are valid

5.7 The consent issued from the board is only with respect to the powers vested under the Water (Prevention & Control of Pollution)Act 1974,Air (Prevention & Control of Pollution)Act Act 1981 and Environment Protection Act, 1986 and The Rules there under. The operation of the quarry shall be commenced only after obtaining clearances from all concerned Authorities.

5.8. There shall not be any quarrying activity between 6 pm to 6 am.

5.9. Mining activities shall be done only in the area marked by Mining & Geology.

5.10. There shall be a minimum distance of 50 m from boundary of quarry operating area to residential building, place of worship, public buildings, public road having vehicular traffic, river or lake, railway line, bridges etc.

5.11. The PM10 in ambient air at the boundary shall not exceed 100 microgram/m3.

5.12. The PM 2.5 in ambient air at the boundary shall not exceed 60 microgram/m3.

5.13 . The sound level (Leq)at 1 m outside the boundary of the site should not exceed the ambient noise Standard applicable to the adjoining areas.

5.10. Conditions given in the Environmental clearance shall be strictly complied with.

5.11. Mining shall be only done as per the mining plan attached with EC

5.12 This Consent is issued based on the Judgement dated 25-10-21 of the Honourable Supreme Court of India in CA no. 6273 of 2021 and connected matters, order dated 14-12-2021 of the Honourable Supreme Court in MA no. 1904 of 2021, Judgement dated 10-11-2021 of the Honourable High Court of Kerala in WP(C) 2773 of 2021 and Judgement dated 10-12-2021 of the Honourable High Court of Kerala in WP(C) 27178 of 2021.

5.13 This Consent is issued subject to any order passed by the Honourable Supreme Court, Honourable National Green Tribunal, Honourable High Court of Kerala in connected matters.

5.14 The consent unless withdrawn earlier and subject to condition no. 1 & 2 shall be valid up to 01/03/2028 . For renewal of consent, application may be submitted via online 2 months in advance of expiry of validity date.

5.15. Quarrying shall be done only within the area marked in the approved location plan attached. No change, deviation or alteration that may affect the environment, extent and location of quarry shall made. Any change in particulars furnished in the application/the identity of the occupier/ authorized agent is to be intimated to the Board forthwith.

5.16 The applicant shall put up sign boards near the main entrance of the plant to display consent number & validity.

5.17. Suitable species of trees and curtain plants shall be planted and maintained within and along the periphery of the premises, forming a green belt to improve the environment.

5.18 Fencing shall be provided around the boundary of quarry and shall be maintained properly.

5.19 After completion of excavation at any site, the abandoned quarry shall be utilized for rain water harvesting with protective barriers/ any other suitable approved purpose or may be reclaimed as per specification.

5.20 The consent issued from the Board shall be valid only for a period when all other statutory or necessary clearances from other concerned authorities are valid

5.21. The applicant shall comply with the instructions that the Board may issue from time to time regarding the prevention and control of Air, Water, Land and Sound Pollution.

5.22. Regular wetting of the roads in the premises of the quarry and approach roads near the quarry shall be done for avoiding excessive dust emission within and outside the boundary of the unit.

5.23. Products shall be transported with proper cover and/or after wetting to prevent spreading of dust.

5.24. Garland drain, silt trap etc shall be provided so that there shall not be discharge of silt containing water from the premises of the unit.

5.25 All other conditions of the Integrated Consent to Operate issued as per reference above remain unchanged


Digitally signed by MABURAJAN P K
Date: 2024.07.12 14:11:44 IST

SIGNATURE OF ISSUING AUTHORITY

CHIEF ENVIRONMENTAL ENGINEER

To

M/s SRI.GEORGE KOCHUPARAMBIL, QUARRY OF UNITED GRANITES & METALS

VAZHITHALA P.O THODUPUZHA

E-Mail : unitedgranitesandmetals@gmail.com

Contact Number :9961748278,

1. This digitally signed document is legally valid as per the Information Technology Act 2000

2. For verifying this document please go to www.keralapcbonline.com and search using Certificate Number/Name of the unit/Application Number in "Certificate Verification" link in the home page of the Board's Phoenix website.

Annexure-14

PANCHAYATH LICENSE



നമ്പർ: 7/2022-2023/JC3/1445/2023

തീയതി: 01/04/2023

മനക്കാട് ഗ്രാമപഞ്ചായത്ത്
 പുതുപ്പിയാരം പി.ഒ., ഇടുക്കി (ജില്ല)
 പിന്: 685608, ഫോൺ: 04862-202248, ഇ-മെയില്: manakkadgp@gmail.com

വ്യവസായം, വാണിജ്യം, സംരക്ഷപ്രക്രിയ, മറ്റ് സേവനങ്ങൾക്കുള്ള ലൈസൻസ്

(കെ.പി.ആർ ആക്ക് സെക്ഷൻ 232, FTE & OS ലൈസൻസ് ചട്ടങ്ങൾ 1996)

ലൈസൻസിയുടെപേര്	ജോർജ്ജ് കൊച്ചുപറമ്പിൽ		
ലൈസൻസിയുടെ മേഖലാസം	കൊച്ചുപറമ്പിൽ, വഴിതല പി.ഒ.		
സ്ഥാപനത്തിന്റെ പേരും, സ്ഥലനാമവും	യുബനോറ്റ് ഗ്രാമേന്റ് സ്റ്റോർ, വഴിതല		
ലൈസൻസ് നൽകിയിട്ടുള്ള പ്രവർത്തനങ്ങൾ	കരിക്കൽ കൂടി നടത്തി സ്റ്റോർ അഗ്രിഗേറ്റർ സ് ഉൾപ്പെടെ പ്രകാരം		
വാർഷിക നമ്പർ/കെട്ടിട നമ്പർ	XII/-		
ലൈസൻസ് കാലാവധി	01/04/2023	മുതൽ	31/03/2028 വരെ
	തുക	മനീഷ് നമ്പർ	തീയതി
ലൈസൻസ് പീസ്	75000/- രൂപ	1220303816, 3817, 4430	15/03/2023, 31/03/2023
മൊട്ടാർ പീസ്	22200/- രൂപ	1220303816, 3817, 4430	15/03/2023, 31/03/2023
തൊഴിൽ നികുതി	12500/- രൂപ	1220303816, 4430	15/03/2023, 31/03/2023
ലൈസൻസ് അനുവദി-ക്രൂണിൽ സ്വാജരാക്കിയ നിരാക്ഷപ പ്രത്യേക്കുടെ വിശദാഖ്യാനൾ (നമ്പർ, തീയതി, കാലാവധി, നൽകിയ തൊഴിൽ സ്ഥാപനം)	<ol style="list-style-type: none"> Integrated Consent to operate-Renewal from PCB No. PCB/RO-EKM/IDK/R181DU446677/2021 Dated 10/08/2021 Valid upto 15/07/2024 (15/07/2024-നും മുമ്പ് ലൈസൻസ് പുതുക്കി നാജരാക്കേണ്ടതാണ്) Environment Clearance from SEIAA No. 1137/EC/SEIAA/KL/2017 Dated 02/03/2023 (Certificate യാമാസമയം പുതുക്കേണ്ടതാണ്) License from PESO No. E/SC/KL/22/811 (E38112) Dated 06/02/2020 Valid upto 31/03/2025,(31/03/2025-നും മുമ്പ് ലൈസൻസ് പുതുക്കി നാജരാക്കേണ്ടതാണ്), BLASTMANS CERTIFICATE 		



മനക്കാട് ഗ്രാമപഞ്ചായത്ത്
 മനക്കാട്, മുംഗാർ, കൊച്ചുപറമ്പിൽ, ഇടുക്കി (ജില്ല)
 ഫോൺ: 04862 202248, ഇ-മെയില്: manakkadgp@gmail.com

ലൈസൻസി താഴെ പറയുന്ന വ്യവസ്ഥകൾ അനുസരിക്കേണ്ടതാകുന്നു.

മലബാറി

ପାଦବିଷ୍ୱାସ

മലബാറ് മാമ്പഞ്ചായൽ



N.B:- ഇവ കെലവന്നും അവ
മനസ്സിലും തന്നെയോണ്ടാണ്

Annexure-15

NEWSPAPER ADVERTISEMENT

നോട്ടീസ്

ഇവാതുക്കന്മന്ത്രാലൈ, കേരള
സംസ്ഥാനം, തൃശ്ശൂർ ജില്ല,
മനക്കാട് പ്രദേശം, മനക്കാട്
ഗ്രാമപഞ്ചായത്ത്, മനക്കാട്
പാലിയോജിപ്പുംപദ്ധതി റീസൈറ്റ്
നമ്പർ 354/4, 354/5, 355/1pt,
351/1pt, 350, 352/1pt-ൽ
പാലിയോജിപ്പുംപദ്ധതി
പാലിയോജിപ്പുംപദ്ധതി അനുകൂലം മുൻ
ഡാക്ടർ കേരള പുനരുപയോഗിക്കുന്ന
കുളങ്ങൾ നാലു സംശയിക്കു
ന്നും അനുഭാവിക്കുന്നു. കേരള
സാമ്പത്തിക വികസന ബോർഡ്
നമ്പർ 1137/EC/SEIAA/KL/2017
തീയതി 17-03-2018 കാർഡ്
പ്രകാരം പാലിയോജിപ്പുംപദ്ധതി മുഖ
ജീവിക്കാനുള്ള പാകർപ്പ് കേരള
സംസ്ഥാന പാലിയോജിപ്പുംപദ്ധതി
ബോർഡ് അംഗത്വാന്വയിൽ
ഉള്ള അവസ്ഥാഭ്യന്തരം നിലനിൽക്കുന്നു.

PUBLIC NOTICE

NOTICE

This is to inform to the General Public
that, the proposed quarry project
in Re-Survey Nos. 354/4, 354/5,
355/1pt., 351/1pt., 350, 352/1pt.
of Shri. George Kochuparambil at
Manakkad Village, Manakkad Grama
Panchayat, Thodupuzha Taluk, Idukki
District, Kerala is accorded with
ENVIRONMENTAL CLEARANCE by
State Environment Impact Assessment
Authority, Kerala vide Order No. 1137/
EC/SEIAA/KL/2017 dt. 17-03-2018
and the copy of the Environmental
Clearance is available with the
office of State Environment Impact
Assessment Authority and may also be
seen on the website of the Authority at
www.seiaakerala.org

Annexure-16

MONITORING PHOTOS





Annexure-17

MONITORING REPORTS



GLOBAL ENVIRONMENT & MINING SERVICES

(Consulting Engineers, Mine designers, Geologist & Surveyors)

3rd Main Road, Basaveswara Badavane,

HOSPETE – 583201, Dist., Vijayanagara (Karnataka)

Ph : +918394 355369

e-mail : gems_hpt@yahoo.com

Website : www.globalmining.in

GEMS-LD/TF/11/01
Report Issue Date: 08.02.2025

ANALYSIS REPORT OF AMBIENT AIR QUALITY DATA

Name of the Industry

Granite Building Stone Quarry of

Shri. George Kochuparambil

Extent: 12.2987Ha

Re-Sy.Nos: 354/4, 354/5, 355/1pt, 351/1pt,
350 & 352/1pt,

Manakkad Village, Thodupuzha Taluk,
Idukki District, Kerala.

Sample Type

Ambient Air Quality Monitoring

Particulars of Sample Collected

Respirable Dust Sampler, FPS Sampler & CO Analyzer

Month

February

Location

Core zone area

Monitoring station code

A1

Duration of Monitoring

24 Hour

Report Number

ULR-TC532325000002243F

RESULTS

Parameters			PM ₁₀ [$\mu\text{g}/\text{m}^3$]		PM _{2.5} [$\mu\text{g}/\text{m}^3$]		SO ₂ [$\mu\text{g}/\text{m}^3$]		NO ₂ [$\mu\text{g}/\text{m}^3$]		CO (1 Hour) (mg/m^3)	
Reference method			IS : 5182:2006 (Part 23) (RF- 2017)		IS : 5182(Part 24): 2019		IS : 5182: 2001 (Part 2) (RF 2017)		IS : 5182: (Part 6) 2006 (RF 2017)		IS : 5182: (Part 10) 1999 (RF 2006)	
Date of Sampling	Date of sample received	Sample code	Result	STD	Result	STD	Result	STD	Result	STD	Result	STD
03.02.2025	04.02.2025	80	55.9	100	20.8	60	12.1	80	13.0	80	ND	4.0

Note:

CO - GEMS/SOP/86/as per CO analyzer Manual (1 hour)

ND - Not Detected (<0.001)

INFERENCE	As per NAAQMS Standards 2009, Report Status: - Measured Values for the above parameters are within the limit.
-----------	--

Analyzed By
Anusha M
Chemist

GLOBAL ENVIRONMENT & MINING SERVICES
Authorized Signature
K. Ramakrishna Reddy
Technical Manager

Note:

1. The result listed refers only to the tested samples & applicable parameters. Endorsement of products is neither inferred nor implied.
2. Water Samples will be destroyed after 15Days, Minerals 3 Months, Filter papers & Thimbles after analysis Discard.
3. This report is not to be reproduced wholly or in part & cannot be used as evidence in the Court of law & should not use any advertising media without special permission in writing.
4. Total liability of our laboratory is limited to the Invoice amount. Any dispute arising out of this report is subject to Hosapete jurisdiction only.
5. Recognized by Ministry of Environment, Forest and Climate Change for Laboratory
6. Recognized by Government of Karnataka, Maharashtra, Goa for DGPS survey



GLOBAL ENVIRONMENT & MINING SERVICES

(Consulting Engineers, Mine designers, Geologist & Surveyors)

3rd Main Road, Basaveswara Badavane,

HOSPETE - 583201, Dist., Vijayanagara (Karnataka)

Ph : +918394 355369

e-mail : gems_hpt@yahoo.com

Website : www.globalmining.in

GEMS-LD/TF/11/01
Report Issue Date: 08.02.2025

ANALYSIS REPORT OF AMBIENT AIR QUALITY DATA

Name of the Industry : Granite Building Stone Quarry of
Shri. George Kochuparambil
Extent: 12.2987Ha
: Re-Sy.Nos: 354/4, 354/5, 355/1pt, 351/1pt,
350 & 352/1pt,
Manakkad Village, Thodupuzha Taluk,
Idukki District, Kerala.

Sample Type : Ambient Air Quality Monitoring
Particulars of Sample Collected : Respirable Dust Sampler, FPS Sampler & CO Analyser
Month : February
Location : Kolady
Monitoring station code : A2
Duration of Monitoring : 24 Hour
Report Number : ULR-TC53232500002244F

RESULTS


Parameters			PM ₁₀ [$\mu\text{g}/\text{m}^3$]		PM _{2.5} [$\mu\text{g}/\text{m}^3$]		SO ₂ [$\mu\text{g}/\text{m}^3$]		NO ₂ [$\mu\text{g}/\text{m}^3$]		CO (1 Hour) (mg/m^3)	
Reference method			IS : 5182:2006 (Part 23) (RF- 2017)		IS : 5182(Part 24): 2019		IS : 5182: 2001 (Part 2) (RF 2017)		IS : 5182: (Part 6) 2006 (RF 2017)		IS : 5182: (Part 10) 1999 (RF 2006)	
Date of Sampling	Date of sample received	Sample code	Result	STD	Result	STD	Result	STD	Result	STD	Result	STD
04.02.2025	05.02.2025	81	48.9	100	18.9	60	11.9	80	12.8	80	ND	4.0

Note:

CO - GEMS/SOP/86/as per CO analyzer Manual (1 hour)

ND - Not Detected (<0.001)

INFERENCE	As per NAAQMS Standards 2009. Report Status: - Measured Values for the above parameters are within the limit.
-----------	--


Analyzed By

Anusha M
Chemist

Authorized Signatory
K. Ramakrishna Reddy
Technical Manager



Note:

1. The result listed refers only to the tested samples & applicable parameters. Endorsement of products is neither inferred nor implied.
2. Water Samples will be destroyed after 15 Days, Minerals 3 Months, Filter papers & Thimbles after analysis Discard.
3. This report is not to be reproduced whole or in part & can not be used in evidence in the Court of law & should not use any advertising media without special permission in writing.
4. Total liability of our laboratory is limited to the test amount. Any dispute arising out of this report is subject to Hospete jurisdiction only.
5. Recognized by Ministry of Environment, Forest and Climate Change for Laboratory
6. Recognized by Government of Karnataka, Maharashtra, Goa for DGPS survey



GLOBAL ENVIRONMENT & MINING SERVICES

(Consulting Engineers, Mine designers, Geologist & Surveyors)

3rd Main Road, Basaveswara Badavane,

HOSPETE - 583201, Dist., Vijayanagara (Karnataka)

Ph : +91 8394 355369

e-mail : gems_hpt@yahoo.com

Website : www.globalmining.in

GEMS-LD/TF/08/01
Report Issue Date: 08.02.2025

TEST REPORT OF AMBIENT NOISE LEVEL DATA

1 Name of the Industry	Granite Building Stone Quarry of Shri. George Kochuparambil Extent: 12.2987Ha
2 Sample Description	Re-Sy.Nos: 354/4, 354/5, 355/1pt, 351/1pt, 350 & 352/1pt,
3 Sample Collected By	Manakkad Village, Thodupuzha Taluk,
4 Particulars of Sample Collected	Idukki District, Kerala.
5 Month	Ambient Noise Level monitoring
6 Duration of the Monitoring	GLOBAL Environment & Mining Services
7 Report No	Noise Level Meter (Lutron SL-4023SD)
	February
	24 Hours Sampling
	ULR-TC53232500002245F

Result

Date	03.02.2025	04.02.2025
Area	Industrial	Residential
Name of the Location	Core zone	Kolady
Sample code	82	83
Time (hrs)	N1	N2
6.00	39.3	36.6
7.00	44.9	38.9
8.00	47.8	43.1
9.00	52.5	48.6
10.00	55.7	47.9
11.00	55.1	48.9
12.00	56.9	50.0
13.00	55.1	48.5
14.00	56.9	46.4
15.00	50.7	47.4
16.00	51.6	49.3
17.00	50.0	46.2
18.00	44.9	46.9
19.00	44.2	47.7
20.00	41.9	46.2
21.00	38.9	42.9
22.00	37.8	40.5
23.00	36.7	39.5
00.00	36.8	36.8
01.00	36.1	37.9
02.00	36.7	35.8
03.00	36.9	35.9
04.00	36.3	35.7
05.00	38.0	36.4

Note:

1. The result listed refers only to the tested samples & applicable parameters. Endorsement of products is neither inferred nor implied.
2. Water Samples will be destroyed after 15Days, Minerals 3 Months, Filter papers & Thimbles after analysis Discard.
3. This report is not to be reproduced wholly or in part & cannot be used as evidence in the Court of Law & should not use any advertising media without special permission in writing.
4. Total liability of our laboratory is limited to the Invoice amount. Any dispute arising out of this report is subject to Hospete jurisdiction only.
5. Recognized by Ministry of Environment, Forest and Climate Change for Laboratory
6. Recognized by Government of Karnataka, Maharashtra, Goa for DGPS survey





GLOBAL ENVIRONMENT & MINING SERVICES
(Consulting Engineers, Mine designers, Geologist & Surveyors)
3rd Main Road, Basaveswara Badavane,
HOSPETE – 583201, Dist., Vijayanagara (Karnataka)
Ph : +918394 355369
e-mail : gems_hpt@yahoo.com
Website : www.globalmining.in

Name of the location	Core zone	Kolady
L max	56.9	50
L min	36.1	35.7
L 10	36.7	36.05
L 50	44.55	44.65
L 90	55.52	48.81
Ld	52.56	47.29
Ln	37.29	37.57
Ldn	51.2	47.4
Leq	50.60	45.52

All Measured Values are in Db(A)

NOISE: (AMBIENT STANDARDS)

Area Code	Category of Area	Limit in dB(A) Leq	
		Day Time	Nighttime
A	Industrial Area	75	70
B	Commercial Area	65	55
C	Residential Area	55	45
D	Silence Area	50	40

Note	Day time shall mean from 6:00 am and 10:00 pm
	Night time shall mean from in between 10:00 pm and 6:00 am
	Silence zone is an area comprising not less than 100 meters around hospitals, educational institutions, courts, religious places or any other area which is declared as such by the competent authority
	Mixed categories of areas may be declared as one of the four above mentioned categories by the competent authority.
	*dB(A) Leq denotes the time weighted average of the level of sound in decibels on scale A which is relatable to human being
	A "decibel" is a unit in which noise is measured
	"A", in dB(A) Leq, denotes the frequency weighting in the measurement of noise and corresponds to frequency response characteristics of the human ear.
Leq: It is energy mean of the noise level over a specified period.	



Note:

1. The result listed refers only to the tested samples & applicable parameters. Endorsement of products is neither inferred nor implied.
2. Water Samples will be destroyed after 150 Days, Minerals 3 Months, Filter papers & Thimbles after analysis Discard.
3. This report is not to be reproduced wholly or in part & cannot be used as evidence in the Court of Law & should not use any advertising media without special permission in writing.
4. Total liability of our laboratory is limited to the Invoice amount. Any dispute arising out of this report is subject to Hospete jurisdiction only.
5. Recognized by Ministry of Environment, Forest and Climate Change for Laboratory
6. Recognized by Government of Karnataka, Maharashtra, Goa for DGPS survey



GLOBAL ENVIRONMENT & MINING SERVICES

(Consulting Engineers, Mine designers, Geologist & Surveyors)

3rd Main Road, Basaveshwara Badavane,

HOSPETE – 583201, Dist., Vijayanagara (Karnataka)

Ph : +918394 355369

e-mail : gems_hpt@yahoo.com

Website : www.globalmining.in

GEMS-LD/1F/23/01

Report Issue Date: 08.02.2025

Analysis Report of Water Quality Data


1	Name of the Industry	Granite Building Stone Quarry of Shri. George Kochuparambil Extent: 12.2987Ha
2	Customer Reference	: Re-Sy.Nos: 354/4, 354/5, 355/1pt, 351/1pt,
3	Sample Collected by	350 & 352/1pt,
4	Particulars of sample collected	Manakkad Village, Thodupuzha Taluk,
5	Sampling procedure	Idukki District, Kerala.
6	Sample Type	Water Samples (Ground Water)
7	Date of sampling	: 03.01.2025
8	Sample Received	: 05.01.2025
9	Date of Analysis	: 07.01.2025
10	Report Number	: ULR-TC53232500002246F

Results

Sl. No.	Parameters	Protocol	Unit	Results		Standard as per IS : 10500 : 2012	
				Sample Code		Desirable limits	Permissible limits
				84	GW		
1.	Temperature	Thermometer	°C	24.3	-	-	-
2.	pH	APHA 23 rd Edition 2017 4500 H+ B (Pg No. 4-95 to 4-99)	-	7.06	6.5-8.5	NR	
3.	Conductivity	APHA 23 rd Edition 2017 2510 A (Pg No. 2-56 to 2-58)	µS/cm	178	-	-	
4.	Total Dissolved Solids	APHA 23 rd Edition 2017 2540 C (Pg No. 2-69 to 2-70)	mg/L	207	500	2000	
5.	Turbidity (NTU)	APHA 23 rd Edition 2017 2130 B (Pg No. 2-13 to 2-15)	NTU	0.81	1	5	
6.	Phosphorous P	APHA 23 rd Edition 2017 4500-D (Pg No. 4-163 to 4-164)	mg/L	<0.01	-	-	
7.	Sodium as Na	APHA 23 rd Edition 2017 Na 3500 B (Pg No. 3-99 to 3-100)	mg/L	7.9	-	-	
8.	Potassium as K	APHA 23 rd Edition 2017 K 3500 B (Pg No. 3-89 to 3-90)	mg/L	0.69	-	-	
9.	Calcium as Ca	APHA 23 rd Edition 2017 3500 Ca B (Pg No. 3-69 to 3-70)	mg/L	53	75	200	
10.	Magnesium as Mg	APHA 23 rd Edition 2017 3500 B Mg By calculation (Pg No. 3-86)	mg/L	8.6	30	100	
11.	Total Hardness as CaCO ₃	APHA 23 rd Edition 2017 2340 C (Pg No. 2-48 to 2-50)	mg/L	147	200	600	
12.	Chloride as Cl	APHA 23 rd Edition 2017 4500 Cl- (Pg No. 4-75 to 4-76)	mg/L	25.0	250	1000	
13.	Sulphate as SO ₄	APHA 23 rd Edition 2017 4500 -SO ₄ ²⁻ E(Pg No. 4-199 to 4-200)	mg/L	42	200	400	
14.	Fluoride as F	APHA 23 rd Edition 2017 4500 F-D (Pg No. 4-90 to 4-91)	mg/L	0.49	1.0	1.5	
15.	Nitrate Nitrogen as NO ₃ ⁻	APHA 23 rd Edition - 4500 NO ₃ ⁻ E (Pg No. 4-131 to 4-132)	mg/L	9.1	45	NR	
16.	Total Alkalinity as CaCO ₃	APHA 23 rd Edition 2017 2320 B (Pg No. 2-37 to 2-39)	mg/L	63	200	600	

Note:

1. The result listed refers only to the tested samples & applicable parameters. Endorsement of products is neither inferred nor implied.
2. Water Samples will be destroyed after 15Days, Minerals 3 Months, Filter papers & Thimbles after analysis Discard.
3. This report is not to be reproduced wholly or in part & cannot be used as evidence in the Court of Law & should not use any advertising media without special permission in writing.
4. Total liability of our laboratory is limited to the invoice amount. Any dispute arising out of this report is subject to Hospete jurisdiction only.
5. Recognized by Ministry of Environment, Forest and Climate Change for Laboratory
6. Recognized by Government of Karnataka, Maharashtra, Goa for DGPS survey





GLOBAL ENVIRONMENT & MINING SERVICES

(Consulting Engineers, Mine designers, Geologist & Surveyors)

3rd Main Road, Basaveswara Badavane,

HOSPETE – 583201, Dist., Vijayanagara (Karnataka)

Ph : +918394 355369

e-mail : gems_hpt@yahoo.com

Website : www.globalmining.in

ULR-TC532325000002246F					
17.	Total Iron as Fe	APHA 23 rd Edition 2017 3500 B Fe B. (Pg No. 3-80 to 3.82)	mg/L	0.23	0.30
18.	Nickel as Ni	APHA 23 rd Edition 3111 B. Direct Air Acetylene Flame method	mg/L	<0.01	0.02
19.	Manganese as Mn	APHA 23 rd Edition 3111 B. Direct Air Acetylene Flame method	mg/L	<0.1	0.10
20.	Copper as Cu	APHA 23 rd Edition 3111 B. Direct Air Acetylene Flame method	mg/L	<0.05	0.05
21.	Zinc as Zn	APHA 23 rd Edition 3111 B. Direct Air Acetylene Flame method	mg/L	<0.1	5
22.	Lead as Pb	APHA 23 rd Edition 3111 B. Direct Air Acetylene Flame method	mg/L	<0.01	0.01
23.	Total Coliforms	IS 15185:2016	MPN/100ml	Ab	Shall not be detectable in any 100ml sample
24.	E-Coli	IS 15185:2016	MPN/100ml	Ab	Shall not be detectable in any 100ml sample

Note: GW: Kolady

NR: No Relaxation. Ab: Absent

INFERENCE	As per Standards IS: 10500:2012 Report Status: - Measured Values for the above parameters are within the limit.
-----------	--

Analyzed By
Anusha M
Chemist


Authorized Signature
K. Ramakrishna Kolady
Technical Manager

Note:

1. The result listed refers only to the tested samples & applicable parameters. Endorsement of products is neither inferred nor implied.
2. Water Samples will be destroyed after 15Days, Minerals 3 Months, Filter papers & Thimbles after analysis Discard.
3. This report is not to be reproduced wholly or in part & cannot be used as evidence in the Court of Law & should not use any advertising media without special permission in writing.
4. Total liability of our laboratory is limited to the Invoice amount. Any dispute arising out of this report is subject to Hospete jurisdiction only.
5. Recognized by Ministry of Environment, Forest and Climate Change for Laboratory
6. Recognized by Government of Karnataka, Maharashtra, Goa for DGPS survey

Annexure-18

AFFORESTATION

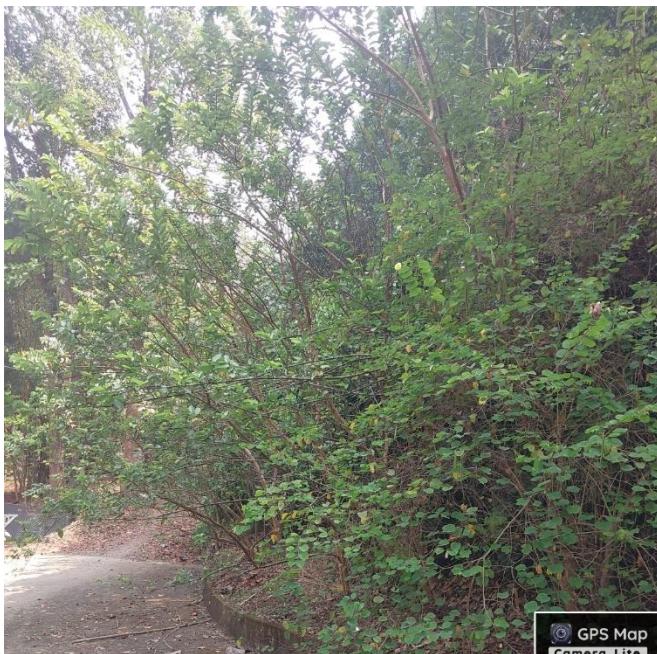

GPS Map
Camera Lite

VJWP+7V4, Vazhithala To Parakkadavu Road, Kolady, Manakkad,
Vazhithala, Kerala 685583, India

Lat 9° 53' 40.40225" N Long 76° 38' 15.44212" E

Local 10:51:07 AM
GMT 05:21:07 AM

Altitude 46 meters
Date Fri, 07 Mar 2025



GPS Map
Camera Lite

VJWP+7V4, Vazhithala To Parakkadavu Road, Kolady, Manakkad,
Vazhithala, Kerala 685583, India

Lat 9° 53' 43.40303" N Long 76° 38' 23.0811" E

Local 10:40:18 AM
GMT 05:10:18 AM

Altitude 77 meters
Date Fri, 07 Mar 2025




GPS Map
Camera Lite

VJWP+7V4, Vazhithala To Parakkadavu Road, Kolady, Manakkad,
Vazhithala, Kerala 685583, India

Lat 9° 53' 43.59156" N Long 76° 38' 22.9574" E

Local 10:40:02 AM
GMT 05:10:02 AM

Altitude 77 meters
Date Fri, 07 Mar 2025

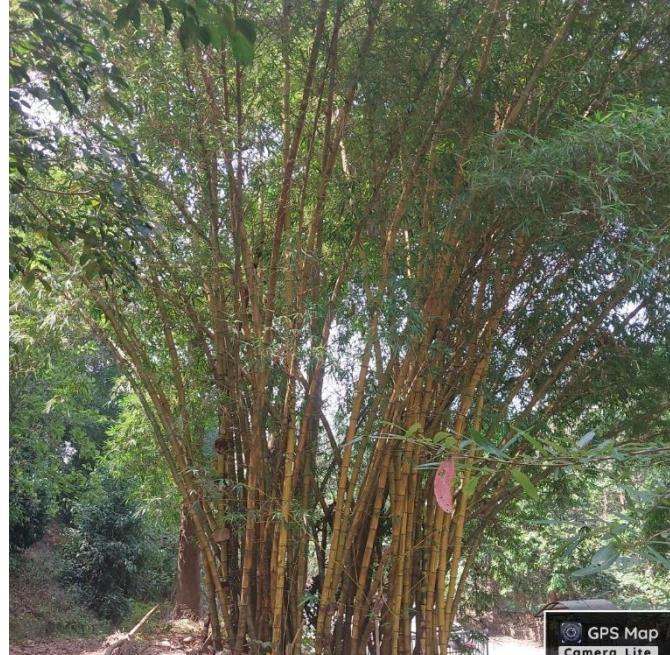


GPS Map
Camera Lite

VJWP+7V4, Vazhithala To Parakkadavu Road, Kolady, Manakkad,
Vazhithala, Kerala 685583, India

Lat 9° 53' 42.0342" N Long 76° 38' 16.35742" E

Local 10:50:21 AM
GMT 05:20:21 AM

Altitude 52 meters
Date Fri, 07 Mar 2025

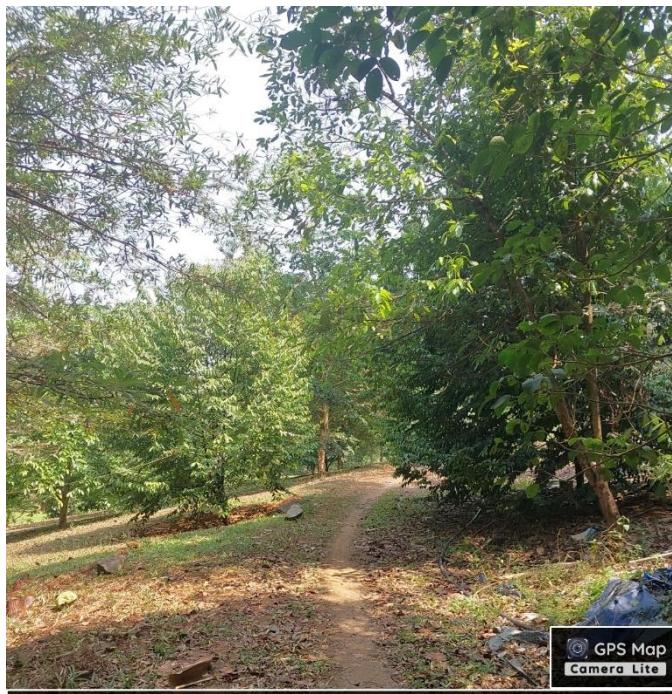

GPS Map
Camera Lite

VJWP+7V4, Vazhithala To Parakkadavu Road, Kolady, Manakkad, Vazhithala, Kerala 685583, India

Lat 9° 53' 41.64374" N Long 76° 38' 16.33805" E

Local 10:49:49 AM
GMT 05:19:49 AM

Altitude 46 meters
Date Fri, 07 Mar 2025



GPS Map
Camera Lite

VJWW+43F, Vazhithala Koladi Road, Vazhithala, Manakkad, Kerala 685583, India

Lat 9° 53' 46.54558" N Long 76° 38' 35.76559" E

Local 11:21:18 AM
GMT 05:51:18 AM

Altitude 44 meters
Date Fri, 07 Mar 2025



GPS Map
Camera Lite

Vazhithala Koladi Road, Vazhithala, Manakkad, Kerala 685583, India

Lat 9° 53' 48.70021" N Long 76° 38' 33.67345" E

Local 11:24:28 AM
GMT 05:54:28 AM

Altitude 39 meters
Date Fri, 07 Mar 2025



GPS Map
Camera Lite

VJWP+7V4, Vazhithala To Parakkadavu Road, Kolady, Manakkad, Vazhithala, Kerala 685583, India

Latitude 9° 53' 40.01219" N
Local 10:50:19 AM
GMT 05:20:19 AM

Longitude 76° 38' 15.5413" E
Altitude 46 meters
Friday, 07.03.2025

Annexure-19

SITE PHOTOGRAPHS



GPS Map
Camera Lite

VJWP+7V4, Vazhithala To Parakkadavu Road, Kolady, Manakkad,
Vazhithala, Kerala 685583, India

Lat 9° 53' 42.75373" N Long 76° 38' 23.33461" E

Local 09:41:08 AM


Altitude 77 meters

GMT 04:11:08 AM

Date Fri, 07 Mar 2025

Annexure-20

MAGAZINE PHOTOGRAPHS

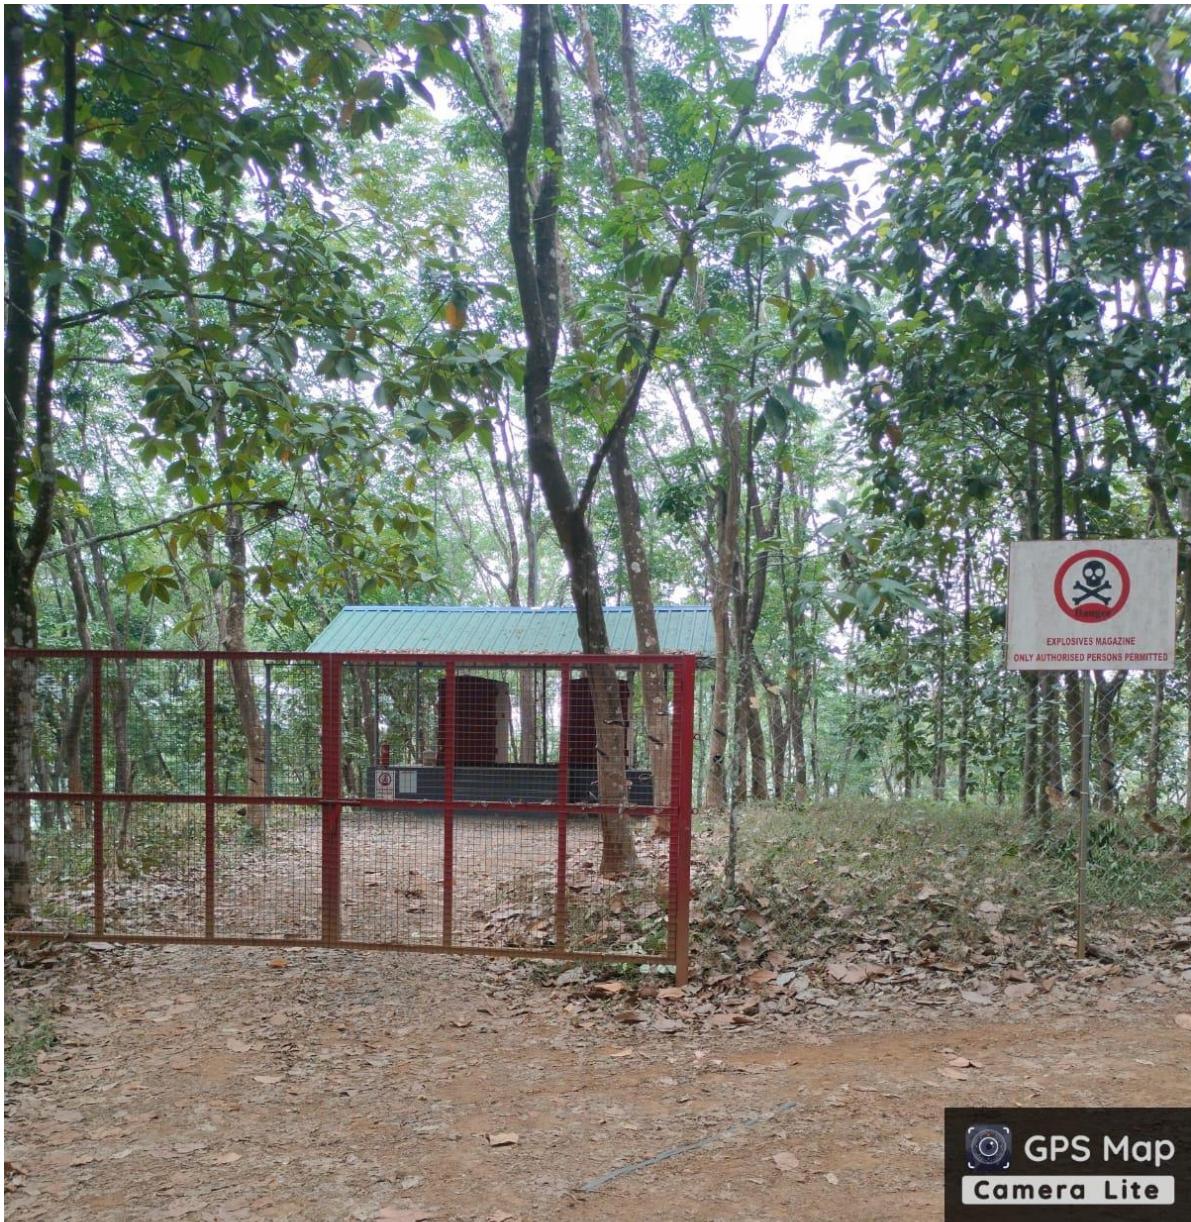

GPS Map
Camera Lite

VJWP+7V4, Vazhithala To Parakkadavu Road, Kolady, Manakkad,
Vazhithala, Kerala 685583, India

Latitude

9° 53' 52.47438" N

Local 01:18:09 PM
GMT 07:48:09 AM

Longitude

76° 38' 19.23457" E

Altitude 51 meters
Friday, 07.03.2025

Annexure-21

NOTARIZED AFFIDAVIT



കേരളം കേരള KERALA

547173

AFFIDAVIT

George Kochuparambil, S/o Emmanuel K George, residing at Kochumarambil House, Vengaloor Kara, Vazhithala P.O., Pin 685583, Manakkadu Village, Thodupuzha Taluk, Idukki District, do hereby affirm and confirm as follows:-

- That, I, proposes to develop a Quarry Project in Re-Survey Nos. 354/4, 354/5, 355/1pt., 351/1pt., 350, 352/1pt, at Manakkad Village, Manakkad Grama Panchayat, Thodupuzha Taluk, Idukki District, Kerala.
- That, the Environment Clearance proceedings number and date are Order No. 1137/EC/SEIAA/KL/2017 dt. 17-03-2018.
- That, all the conditions stipulated in the Environment Clearance would be scrupulously followed.

DEPONENT: GEORGE KOCHUPARAMBIL


Verification :

Verified that my above statements are true to the best of my knowledge and belief and nothing material has been concealed therein.

DEPONENT: GEORGE KOCHUPARAMBIL

Place : Idukki
Date : 13-04-2018

Solemnly affirmed and signed
before me by the deponent,
known to me on this the 13th
day of April 2018
at my office at Thodupuzha

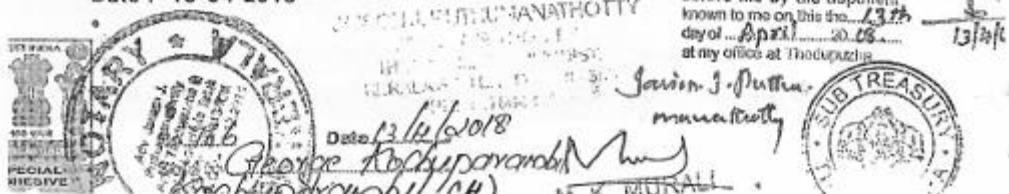

Annexure-22

**LIST OF CSR ACTIVITIES WITH
PHOTOS AND RECEIPTS**

Annexure-23

COPY OF HEALTH INSURANCE FOR EMPLOYEES



Policy Schedule

Issuing office	Niva Bupa Health Insurance Company Limited (formerly known as Max Bupa Health Insurance Co. Ltd.)
Policyholder's name	United Granites & Metals
Policyholder's address	0 255 United Granites Kolady Manekkad IDUKKI KERALA
Policy number	50979900202400
Date and time of Policy commencement	27/10/2024 12:00 AM
Date and time of Policy expiry	26/10/2025 11:59 PM
Aggregate Sum Insured	23000000.00
Premium Payment Frequency	Annual
Free look Period	30 Days
Intermediary name	The Federal Bank Ltd.
Intermediary code	BNK0040001
Intermediary contact number	04842385604
Claims Administrator	In-House
Total no of lives (115)	Self 115 + Dependents 0
Initial no of lives (115)	Self 115 + Dependents 0
Rater Type	Per member



Premium Receipt

Dony
0 255 United Granites Kolady Manakkad IDUKKI KERALA
685583

We acknowledge the receipt of payment towards the premium of the following health insurance policy.

Policy Holder's Name: United Granites & Metals	Policy Number	50979900202400	
	Sum Insured (Rs.)	Rs. 23000000.00	
Commencement Date	27/10/2024 12:00 AM	Expiry date	26/10/2025 11:59 PM

Gross Premium(Rs.)	Rs. 636260.00
--------------------	---------------

Upon issuance of this receipt, all previously issued temporary receipts, if any, related to this policy are considered null and void.

GST Details	
GSTI No.: 09AAFCM7916H1Z6	SAC Code / Type of Service: 997133 / General insurance Services
Niva Bupa State Code: 09	Customer State Code / Customer GSTI No.: 32 / 32AFJP9650E1ZH

Location: New Delhi
Date: 24/10/2024

Director - Operations & Customer Service
For and on behalf of Niva Bupa Health Insurance Co. Ltd.
(Formerly known as Max Bupa Health Insurance Co. Ltd.)

Annexure-24

BLAST INDUCED GROUND VIBRATION STUDY REPORT

**TECHNICAL REPORT ON BLAST INDUCED GROUND VIBRATION STUDIES AND
ASSESSMENT OF EFFECT OF BLASTING OPERATIONS IN
GRANITE BUILDING STONE QUARRY OF
Shri. GEORGE KOCHUPARMBIL,
MANAKKAD VILLAGE, THODUPUZHA (TK), IDUKKI DISTRICT, KERALA**



GLOBAL ENVIRONMENT & MINING SERVICES

#212, Celestic Towers, Palm Avenue,
Green Glen Layout, Bellandur,
Bangalore – 560103
Ph : +91 6361550211
e-mail : www.gems.blr@globalmining.com
website : <http://www.globalmining.in/>



**BLAST INDUCED GROUND VIBRATION STUDIES AND
ASSESSMENT OF BLASTING EFFECTS IN
GRANITE BUILDING STONE QUARRY OF
Shri. GEORGE KOCHUPARAMBIL**

Cyriac Joseph BE (Mining), FCC.

Sankar. S BE (Mining), FCC.

Saju. K BE (Mining), FCC.

Jaikaran H. J. BE (Mining), SCC.



GLOBAL ENVIRONMENT & MINING SERVICES

#212, Celestic Towers, Palm Avenue,
Green Glen Layout, Bellandur,
Bangalore – 560103

Ph : +91 6361550211

e-mail : www.gems.blr@globalmining.com

website : <http://www.globalmining.in/>



ABSTRACT

Shri. George Kochuparambil, is operating granite building stone quarry in Re-Sy Block No.11, Re-Sy. Nos: 354/4, 354/5, 355/1pt, 351/1pt, 350 & 352/1pt in Manakkad Village, over an extent of 12.2987 Ha in Thodupuzha Taluk, Idukki District, Kerala. The Granite building Stone is very hard and has to be excavated in this stone quarry with Drilling and Blasting methodology. As a Part of Statutory requirement for DGMS & Complying the EC condition this scientific study has been taken up to ensure the ground vibration level. A field visit was made to the quarry site by a team of following mining engineers & Drilling & Blasting experts.

- 1) Mr. Cyriac Joseph BE (Mining), FCC.
- 2) Mr. Sankar S BE (Mining), FCC.
- 3) Mr. Saju K BE (Mining), FCC.
- 4) Mr. Jaikaran H.J BE (Mining), SCC.

A reconnaissance survey was made in the 4th of March 2025. The quarry area is surrounded by good vegetation and there are few houses outside the lease boundary of South West & South-East direction which is not visible from blasting area due to undulations. Since all the observed Dominant frequencies were above 8 Hz, as per DGMS guidelines, the permissible limit for Peak particle velocity (PPV) can be considered as 10 mm/sec.

Blasting is very important process for mining operation and lot of explosives is used for this purpose. Various studies indicate that fragmentation accounts

for only 20 – 30% of total amount of explosive energy used. Rest of the energy is lost in the form of ground vibration, fly rock, air overpressure and noise. The specific problem associated with ground vibrations represents the human response to them. Uncontrolled Blasting vibrations may also cause significant damage to nearby houses or various structures.

Scientific study was carried out to assess the intensity of ground vibration generated due to and their impacts on the surrounding structures. In total, 12 blast were conducted at four different locations in the quarry blasting operations were monitored through geophone at the distance of 64.7m, 115.9m, 168m, 301.9m and 518m. The data obtained from the Instantel micromate instrument were analyzed and graphical output was obtained from the instrument. The Peak Particle Velocity (PPV), Maximum charge per delay, air over pressure was recorded for each blast. After that the various observations were compared with standards to determine the Conclusion.

From the analysis of Blast induced ground vibration at the Granite building stone quarry of Shri. George Kochuparambil, it was determined that the vibration level was less than 4 mm/sec for the blasts (for Building & Structures not belonging to Owner). The results determined from the study indicates that the peak particle velocity, air over pressure generated due to blasting were within the limits.

INDEX

NO	TITLE	PAGE NO
1	EXECUTIVE SUMMARY	1
2	INTRODUCTION	4
3	DETAILS OF STRUCTURES NOT BELONGING TO THE OWNER	5
4	TOPOGRAPHY & LOCAL GEOLOGY OF THE AREA	6
5	BLAST VIBRATION STUDY	7
6	DRILLING & BLASTING	7
7	OBJECTIVES	9
8	METHODOLOGY	9
9	GROUND VIBRATIONS	10
10	PARAMETERS AND PROPAGATIONS	11
11	DAMAGE LEVEL	13
12	HUMAN RESPONSE TO GROUND VIBRATION	14
13	FIELD INVESTIGATION	14
14	GROUND VIBRATION MONITORING	24
15	SUMMARY OF BLAST MONITORING	28
16	RECOMMENDATIONS	30
17	BIBLIOGRAPHY	33

APPENDIX

NO	TITLE	PAGE NO
1	LAYOUTS OF BLASTS STUDIED	34
2	BLAST EVENT REPORTS	40

LIST OF FIGURES

NO	TITLE	PAGE NO
1	OVERVIEW OF MINES	4
2	HOUSE OF Mr. TOMY KURIAN	5
3	HOUSE OF Mr. KRISHNAN KRISHNAN	6
4	GOOGLE EARTH IMAGE OF THE MINE SHOWING BLASTING LOCATIONS & MONITORING POINTS	7
5	DIFFERENT KIND OF WAVEFORMS	11
6	DRILLING OF BLAST HOLES USING JACK HAMMER	15
7	NON-ELECTRIC DETONATOR & STLD USED IN THE QUARRY	16
8	EXPLOSIVE CARTRIDGES USED IN QUARRY	16
9	CHARGING OF BLAST HOLES	17
10	STEMMING OF BLAST HOLES	17
11	CHARGED HOLES	18
12	MUFFLING ARRANGEMENT	19
13	WATER SPRAYING SYSTEM & WATER SPRINKLED FACE	19
14	WATER MIST SYSTEM	20
15	BLASTING SHELTER FOR SAFETY OF BLASTING PERSONALS	20
16	FRAGMENTED ROCK AFTER BLASTING	21
17	BLAST VIBRATION MONITORING	22, 23
18	RECOMMENDED BLASTHOLE PATTERN	31

LIST OF TABLES

NO	TITLE	PAGE NO
1	PERMISSIBLE PPV LEVELS RECOMMENDED BY DGMS	13
2	BLAST DETAILS	25, 26, 27
3	SUMMARY OF THE BLAST MONITORING	28
4	BLASTING RECOMMENDATIONS	32

ABBREVIATIONS:

1. DGMS – *Directorate General of Mines Safety*
2. NABET – *National Accreditation Board for Education & Training*
3. NABL – *National Accreditation Board for Testing and Calibration Laboratories*
4. PPV – *Peak Particle Velocity*
5. dB – *Decibel*

EXECUTIVE SUMMARY

This report relates to the scientific study conducted by Global Environmental and Mining Services, Bangalore at Stone Quarry of Shri. George Kochuparambil. The main objective of the study was to check the blast induced ground vibration and air overpressure/noise generated during blasting. Fly rocks generated during the trial blasts were also observed and studied.

Twelve blasts were conducted at different locations of the mine. Blast induced vibration and air overpressure/noise were monitored at different locations. The investigational work, observations, result of the blasts conducted, analysis of the data and conclusions are summarized below.

1. In total, twelve blasts were conducted and monitoring were done in nearest house of Mr. Tomy Kurian (towards South West of Mine lease boundary – M3), house of Mr. Krishnan Krishnan (towards North East of Mine lease boundary -M5), M1 (inside the Mine), M2 (near to Mine office) and M4 (northern side of mine lease area, inside mine). All the twelve blasts, were conducted with bench blasting pattern.
2. All the blasts were conducted using 33 mm dia blast hole. Small diameter cartridge explosive of 25 mm diameter, 0.125 Kg weight per cartridge, ANFO and Nonel initiation system with DTH- 250 ms & 25 ms at surface, & STLD – 42 ms were used in all blasts.
3. Depth of holes used are 2.4m and 1.8m. The total number of holes varied from 26 to 11. All the blasts were done in hard rock. So staggered pattern of drilling was used.

4. The burden and spacing for the bench blast was 1.0 m and 1.2 m respectively. The 2.4m holes were charged with two cartridges of slurry explosives and 400gm of ANFO and 1.8m holes were charged with two cartridges of slurry explosives and 200gm of ANFO. The explosive quantity per hole was 0.650 Kg for 2.4m holes and 0.450Kg for 1.8m holes.
5. Blast induced ground vibrations and air overpressure/ noise generated during the blasts were monitored on compacted ground surface using Micromate of Instantel, Canada. Distances of monitoring points from the blast site varied from 64.7m to 518m.
6. The Peak Particle Velocity was not detected near the house of Mr. Krishnan Krishnan (M5). Distance of house from blast location was 518m.
7. The Peak Particle Velocity was not detected near the house of Mr. Tomy Kurian. Distance of house from blast locations was 301.9m.
8. The Peak Particle Velocity recorded at Monitoring Point M1 were 3.845mm/s, 3.402mm/s and 3.034mm/s. Distance of M1 from blast location was 64.7m.
9. The Peak Particle Velocity recorded at Monitoring Point M2 were 1.149mm/s, 0.999mm/s and 0.885mm/s. Distance of M2 from blast location was 115.9m.
10. The Peak Particle Velocity recorded at Monitoring Point M4 were 0.233mm/s and 0.327mm/s. Distance of M4 from blast location was 168m.
11. The highest value of vibration recorded was at monitoring point M1 which was at a distance of 64.7m from blast site. PPV recorded was 3.845 mm/s. This was recorded in blast no: 2 where maximum charge per delay was 0.650 Kg and total explosive charge in the blasting round was 16.25Kg.
12. Fly rocks up to 30 m was observed in blasting without muffling mats and up to 5 m in muffled blasting. The control of fly rock was achieved through proper

blast design, Nonel initiation system and proper implementation and supervision of blasting operation.

13. Details of all the blasts studied are given in the table - 2. Summary of the blast are given in Table - 3. All the blasts layouts are given in Appendix - I. Blast events are given in Appendix - II.
14. The readings recorded were within the DGMS permissible limit.

INTRODUCTION:

Shri. George Kochuparambil is operating a granite building stone quarry since 1998. This company is more committed towards environment. Their registered office is in, Kochuparambil house, Vazhithala Post, Thodupuzha Taluk, Idukki District, Kerala-685 583. They have been granted a mining lease to quarry Granite Building Stone over an area of 12.2987 Ha. in Re-Sy Block No.11, Re-Sy. Nos: 354/4, 354/5, 355/1pt, 351/1pt, 350 & 352/1pt of Manakkad Village, Thodupuzha Taluk, Idukki District, Kerala State (www.unitedgranitesandmetals.in). Vide order No: 451/2018/-19/890/M3/2017/DMG, dated: 01.10.2018 for a period of 12 years from 04.10.2018 to 03.10.2030.



Fig 1: Overview of Mines

The Environmental clearance is also obtained for this mining lease vide letter no. 1137/EC/SEIAA/KL/2017, Dated: 17/03/2018, for a maximum production of 4,00,000 MTA for a period of five years. Further the validity of EC was extended for the project life of 16 years from the date of original EC (i.e. 17.03.2018) on 02.03.2023.

This granite building stone quarry is located at 6.0 Kms from Manakkad Village in Thodupuzha Taluk. It is at a distance of 10.6 Kms by road from Thodupuzha town. It can be reached from Vazhithala - Parakkadavu Road.

DETAILS OF STRUCTURES NOT BELONGING TO THE OWNER:

The house of Mr. Tomy Kurian, is located at South West side of the Mine Lease at a distance of 153 m from the Boundary Pillar No. 48. Coordinates of the House is 9°53'35.16"N & 76°38'18.64"E. This is the nearest house in South west Direction of the Lease Area. The mentioned House/Structure not belonging to the Owner is situated near the Current year production Face of the Mine Lease.



Fig 2: House of Mr. Tomy Kurian

The house of Mr. Krishnan Krishnan, is located at North East side of the Mine Lease at a distance of 187 m from the Boundary Pillar No.12. Coordinates of the House is $9^{\circ}53'48.36''N$ & $76^{\circ}38'41.28''E$. This the nearest house located in the North East direction of the Lease Area.



Fig 3: House of Mr. Krishnan Krishnan

TOPOGRAPHY & LOCAL GEOLOGY OF THE AREA:

The lease is located on the slope of the area gently dipping towards NE. The highest elevation in this area is 142.0 m above MSL and the lowest elevation is 37 m above MSL.

The granite building stones are well exposed in the working pit, whereas the part of area with lower elevation is covered with topsoil/waste of about 0 to 2.2m thickness.

BLAST VIBRATION STUDY:

On 07.03.2025, 12 Rounds of Blasts were conducted. The locations of Blasting & Monitoring stations are plotted in the Google Earth and shown below.

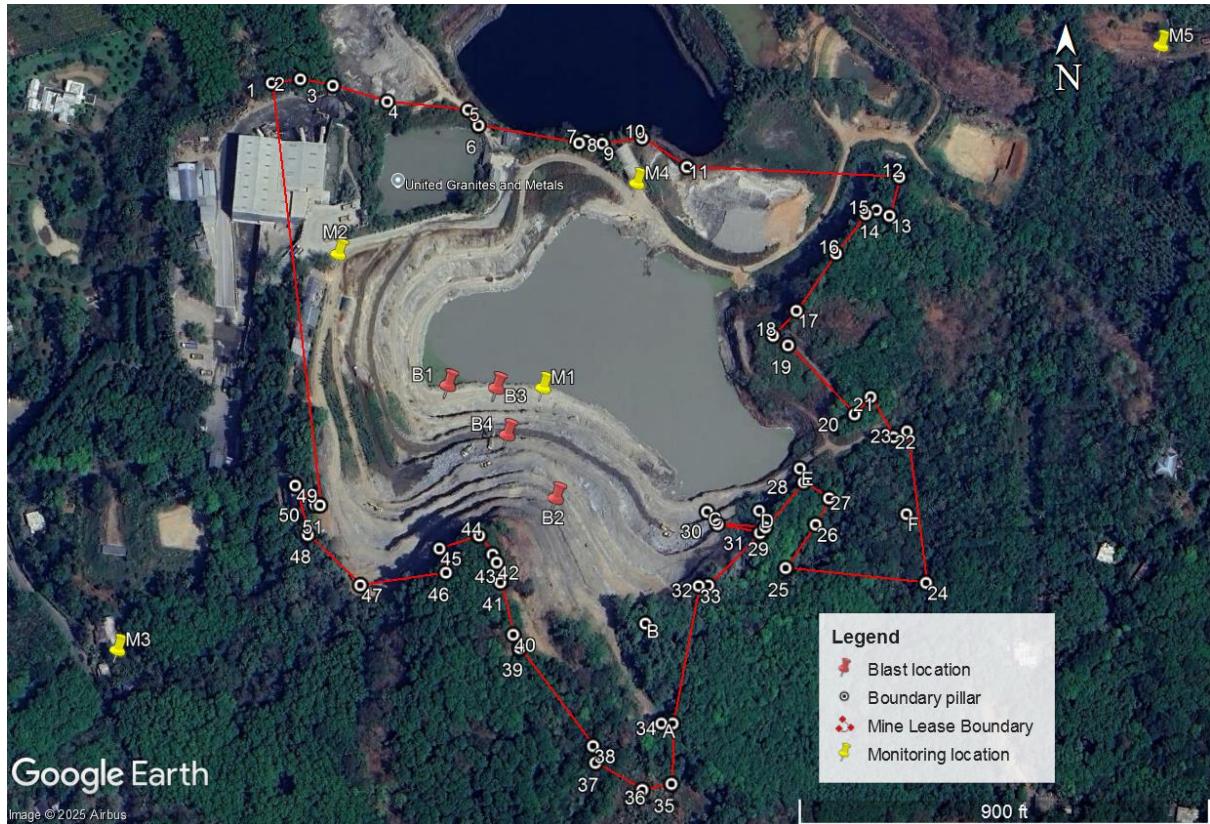


Fig 4: Google Earth Image of the Mine showing Blasting Locations & Monitoring Points

DRILLING & BLASTING:

Drilling and blasting combination are still an economical and viable method for rock excavation and displacement in mining as well as in civil construction works. The ill effects of blasting, i.e., ground vibrations, air blasts, fly rocks, back breaks, noises, etc. are unavoidable and cannot be completely eliminated but certainly minimize up to permissible level to avoid damage to the surrounding environment with the existing structures. Among all the ill

effects, ground vibration is major concern to the planners, designers and environmentalists. A number of researchers have suggested various methods to minimize the ground vibration level during the blasting. Ground vibration is directly related to the quantity of explosive used and distance between blasting face to monitoring point as well as geological and geotechnical conditions of the rock units in excavation area. Blast induced ground vibration is an impact from the use of explosives that has historically been an extremely difficult problem to effectively mitigate. There are many variables and site constants involved in the equation that when combined, result in the formation of a complex vibration waveform generated by the confined detonation of an explosive charge.

The application of proper field controls during all steps of the drilling and blasting operation will help to minimize the adverse impacts of ground vibrations, providing a well-designed blast plan. This design would consider the proper hole diameter and pattern that would reflect the efficient utilization and distribution the explosives energy loaded into the blast hole. It would also provide for the appropriate amount of time between adjacent holes in a blast to provide the explosive. The optimum level of energy confinement. After the blast has been properly designed, the parameters that have the greatest effect on the composition of the ground vibration waveform are:

- Geology between the blast site and the monitoring location
- Accurate delay timing between blast holes in a detonation sequence

Geological and geotechnical conditions and distance between blasting face to monitoring point cannot be altered but the only factor, i.e. quantity of explosive can be estimated based on certain empirical formulae proposed by

the different researchers to make ground vibrations in a permissible limit. An appropriate and rock friendly blasting can be only alternative for smooth progress of the rock removal process.

OBJECTIVES

To study the blast vibrations caused due to the mine blasting, and prediction of safe explosive charge for protection of surface structures.

- To conduct the reconnaissance survey at the mine to identify the nearest villages
- To monitor ground vibration produced from blasting at different distances by consultation with mine authorities
- To analyze the monitored ground vibration data to arrive at the site-specific predictor equations.
- To recommend the safe maximum charge per delay to keep the vibration level within the safe limits as per DGMS standards.

METHODOLOGY

- A preliminary reconnaissance survey was done to understand the quarrying operations, location of surrounding structures or houses
- Twelve blasts were conducted at Four locations in the quarry with the different blast configurations
- Ground vibrations generated from the blasting operation were monitored with Instantel Micromate instrument.

- Data generated was analyzed systematically and conclusions were drawn. Suitable recommendations are made to conduct the blasting operations in the quarry in a safe manner.

GROUND VIBRATIONS


The movement of any particle in the ground can be described in three ways; displacement, velocity and acceleration. Velocity transducers (Geophones) produce the voltage which is proportional to the velocity of movement, and can be easily measured and recorded. They are robust and relatively inexpensive and so are most frequently used for monitoring. It has been shown in many studies, most notably by USBM that it is velocity which is most closely related to the onset of damage, and so it is velocity which is almost always measured. If necessary, the velocity recording can be converted to obtain displacement or acceleration. Each trace has a point where the velocity is a maximum (+ve or -ve) and this is known as peak particle velocity (or PPV) which has a unit of mm/s. Geophones are only able to respond to vibrations.

Ground vibration radiates outwards from the blast site and gradually reduces in magnitude. When an explosive charge is detonated in a blast hole, strain waves are generated in the surrounding rock mass carrying huge quantity of energy. This energy generates cracks and fractures in the strata due to various breakage mechanisms such as crushing, radial cracking, reflection breakage etc. Combined, the crushed and fractured zones encompass a certain volume of permanently deformed rock. When the intensity of strain waves diminishes to the level where no permanent deformation occurs in the


rock mass, i.e., beyond the fragmentation zone, strain waves propagate through the strata in the form of elastic waves. These waves in the elastic zone are known as ground vibrations.

The Ground vibration wave motion consists of different kinds of waves:


- a. *Longitudinal (or L) waves.*
- b. *Rayleigh (or R) waves.*
- c. *Transverse (or T) waves.*

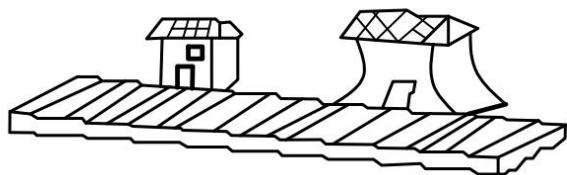

a. Longitudinal Wave

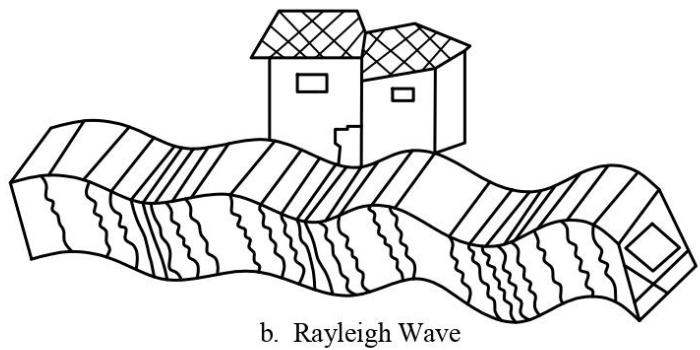

b. Rayleigh Wave

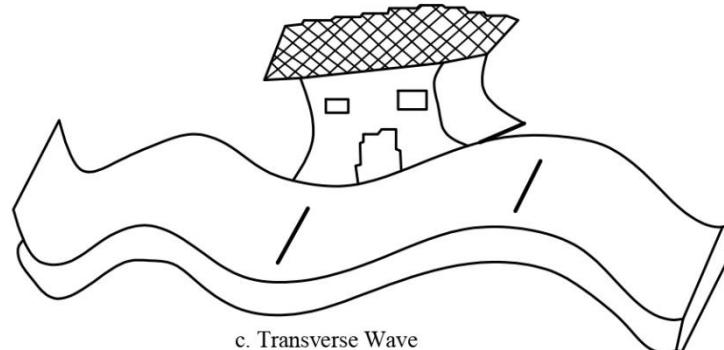

c. Transverse Wave

Fig 5: Different kind of waveforms

PARAMETERS AND PROPOGATIONS

The parameters, which exhibit control on the amplitude, Dominant frequency and duration of the ground vibrations, are divided in two groups as follow:

- a) Non-controllable parameters
- b) Controllable parameters

The non-controllable parameters are those, over which the blasting engineer does not have any control. The local geology, rock characteristics and distance

of the structures from the blast site is non-controllable parameters. However, the control on the ground vibrations can be established with the help of controllable parameters. The same have been reproduced below:

1. Charge weight
2. Delay interval
3. Type of explosives
4. Direction of blast propagation
5. Burden, spacing and specific charge
6. Coupling
7. Stemming amount
8. Type of stemming
9. Charge depth
10. Angle of borehole

DAMAGE LEVEL

In India the Directorate General of Mines safety (Government of India) suggest safe limit of ground vibration for different categories of structures with frequencies of <8 Hz, 8 to 25Hz and >25Hz Respectively. Details of the permissible ground vibration standards given by DGMS (Technical Circular no: 7/1997) is given below

Type of Structure	Dominant Excitation Frequency, Hz		
	<8 Hz	8-25 Hz	>25 Hz
(A) Buildings/Structures not belong to the Owner			
(i) Domestic Houses/Structures (Kuchha Brick & Cement)	5	10	15
(ii) Industrial Buildings (RCC & Framed Structures)	10	20	25
(iii) Objects of Historical importance & Sensitive Structures	2	5	10
(B) Buildings belonging to Owner with limited span of life			
(i) Domestic Houses/Structures (Kuchha Brick & Cement)	10	15	25
(ii) Industrial Buildings (RCC & Framed Structures)	15	25	50

Table 1: Permissible PPV Levels recommended by DGMS

HUMAN RESPONSE TO GROUND VIBRATION

Human beings are more sensitive to ground vibration and noise. People inside buildings will respond differently than people outside. One of the most important factors is the presence of secondary sounds, such as rattling windows and doors. Complaints resulting from blast vibration to a large extent mainly due to rattling effect and fear of damage, rather than damage. The human body is very sensitive to low vibration levels, but unfortunately it is not a reliable damage indicator. Blasting nowadays is highly technological and precisely planned. In spite of this there are complaints because humans are very sensitive to vibrations and can detect levels as low as 0.5mm/s. people tend to complain about ground vibrations even below the accepted damage level because of many reasons. How they notice and respond to vibration varies greatly from person to person. For the same intensity different persons may react differently with age, health, state of mind and attitude. Blast vibrations effects became intolerable to humans at levels appreciably lower than levels at which structural damage takes place. The result is that often complaints can be received due to human response and not due to situation producing damage.

FIELD INVESTIGATION

Quarrying starts with drilling of 33mm small diameter blasthole of 2.40m and 1.80m depth, using hand held jackhammer drills (Fig. 6). The Burden is about 1.0 m & the Spacing is about 1.2 m. Once the blast holes are ready, these holes are charged with small diameter (25mm) explosive cartridges, weighing 125g (fig. 8) & ANFO. Fig 9 shows the charging of holes. NONEL detonators

(DTH-250ms and surface-25ms) are used for initiating the blast holes and also Surface Trunk Line Delay (STLD of 42ms) for achieving required delay in the blast round (Fig. 7). Fig. 11 shows the charged holes after placing required quantity of explosive into the blast holes. The remaining length of the hole is stemmed using the 3 mm material and Drill cuttings (Fig. 10). Fig. 12 shows the muffling arrangement of blasting area/charged holes with blasting mats to control the fly rocks. Prior to blasting, the area to be blasted is wetted with the water sprayer attached to the water tanker. Fig. 13 shows the water tanker mounted spraying system. Water misting system is installed to arrest the propagation of dust generated by mining activities. Fig. 14 shows the misting system. Fig. 15 shows the blasting shelter for safety of blasting personals. Fig.16 shows the fragmented material from the blasting operations.



Fig 6: Drilling of Blast Holes using Jack Hammer



Fig 7: Non-Electric Detonator & Surface Trunk Line Delay used in the Quarry



Fig 8: Explosive Cartridges used in the Quarry



Fig 9: Charging of Blast holes



Fig 10: Stemming of Blast holes



Fig 11: Charged Holes



Fig 12: Muffling arrangements to control the Fly rocks



Fig 13: Water spray system and water sprinkled face




Fig 14: Water mist system




Fig 15: Blasting shelter for Safety of Blasting Personals



Fig 16: Fragmented Rock after Blasting

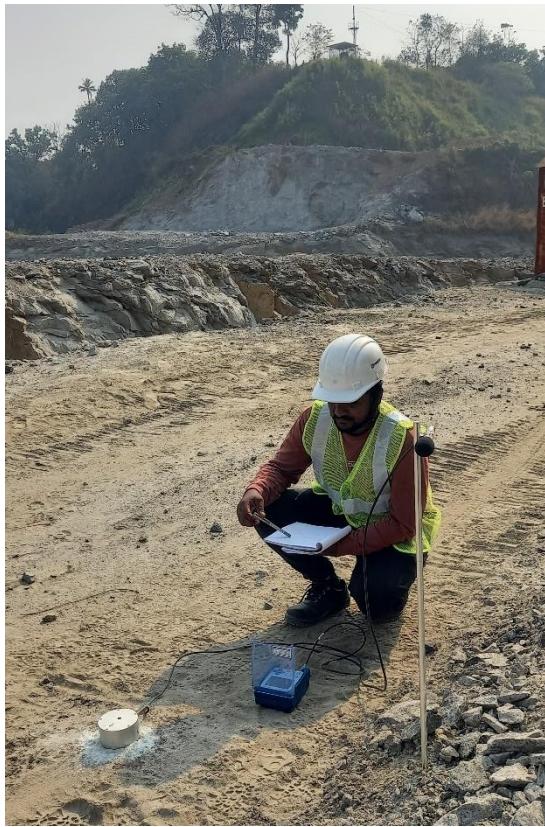

Monitoring Station-1

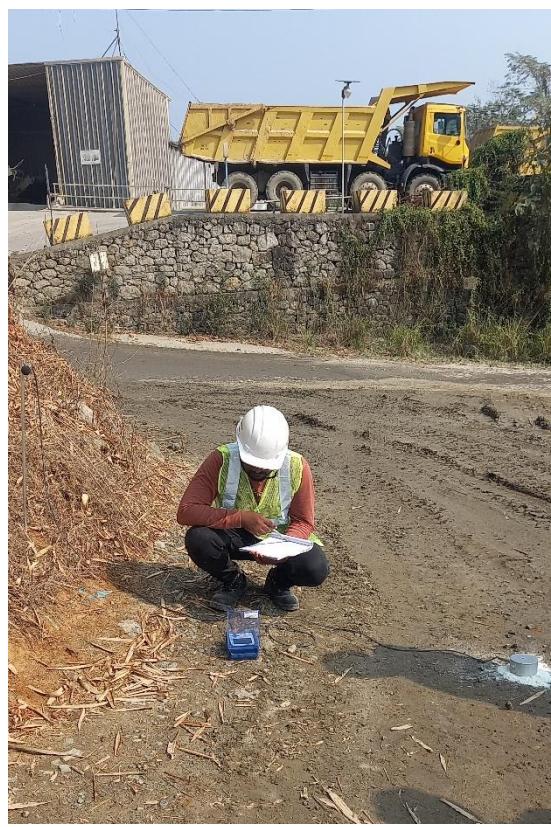

Monitoring Station-2



Monitoring Station-3



Monitoring Station-4

Fig 17: Blast Vibration Monitoring



Monitoring Station-5

Fig 17: Blast Vibration Monitoring

GROUND VIBRATION MONITORING

Scientific study was carried out to assess the intensity of ground vibrations generated due to blasting operations and their impact on the surrounding structures. In total, 12 blasts were conducted at different locations in the quarry. Blastholes of 2.4m depth were charged with the 400gms of ANFO & 250gms of Slurry explosive and 1.8m depth were charged with the 200gms of ANFO & 250gms of Slurry explosive. NONEL based shock tube detonator & Surface Trunk Line Delays (STLD) are used for achieving required delay timing. The blast round was initiated after getting safety clearance from all directions. Ground vibration generated from different blast were monitored using Instantel Micromate, Canada and geophone of these blast vibration monitors records the ground vibration. Trigger level of geophone was set to a minimum PPV of 0.127 mm/sec. This indicate that the instrument will start monitoring the ground vibration. Geophone of the instrument is glued to the ground effectively using Plaster of Paris. Monitoring was done at different distances from blasting site to know the propagation of ground vibration from the quarry site. Fig.17 shows the study carried out to monitor the ground vibration towards the nearby houses & inside the Mine. Details of all the blasts studied are given in the table-2 & the summary of the blast are given in Table-3. All the blasts layouts are given in Appendix- I. Blast events are given in Appendix- II.

Table 2: Monitored Blast details

S. No	Description	Blast No. 1	Blast No. 2	Blast No. 3	Blast No. 4
1	Date of Blast	07.03.2025	07.03.2025	07.03.2025	07.03.2025
2	Time of Blasts (Hours)	9:32:45	9:33:50	9:35:20	9:45:54
3	Location of blasts	9°53.6835'N, 76°38.4226'E	9°53.6835'N, 76°38.4226'E	9°53.6835'N, 76°38.4226'E	9°53.6835'N, 76°38.4226'E
4	Diameter of blast hole (mm)	33	33	33	33
5	Burden (m)	1.0	1.0	1.0	1.0
6	Spacing (m)	1.2	1.2	1.2	1.2
7	Depth of blast hole (m)	2.4	2.4	2.4	2.4
8	No of blast holes	20	25	14	24
9	Explosive charge/ Hole (kg)	0.650	0.650	0.650	0.650
10	Maximum Charge per delay (kg)	0.650	0.650	0.650	0.650
11	Total Charge / Blast (kg)	13.00	16.25	9.10	15.60
12	Initiation System	Nonel	Nonel	Nonel	Nonel
13	Initiation Pattern	Row to Row	Row to Row	Row to Row	Row to Row
14	Location of instrument	9°53.6831'N, 76°38.4582'E	9°53.6831'N, 76°38.4582'E	9°53.6831'N, 76°38.4582'E	9°53.7320'N, 76°38.3815'E
15	Distance (m)	64.7	64.7	64.7	115.9
16	PPV (mm/s)	3.402	3.845	3.034	1.149
17	AOP/ Noise (dB)	115.6	121.6	111.1	109.3
18	Dominant Frequency (Hz)	141.3	88.25	65.50	41.25

Table 2: Monitored Blast details

S. No	Description	Blast No. 5	Blast No. 6	Blast No. 7	Blast No. 8
1	Date of Blast	07.03.2025	07.03.2025	07.03.2025	07.03.2025
2	Time of Blasts (Hours)	9:47:48	9:49:11	10:02:37	10:04:10
3	Location of blasts	9°53.6835'N, 76°38.4226'E	9°53.6835'N, 76°38.4226'E	9°53.6431'N, 76°38.4625'E	9°53.6431'N, 76°38.4625'E
4	Diameter of blast hole (mm)	33	33	33	33
5	Burden (m)	1.0	1.0	1.0	1.0
6	Spacing (m)	1.2	1.2	1.2	1.2
7	Depth of blast hole (m)	2.4	2.4	2.4	2.4
8	No of blast holes	18	14	22	11
9	Explosive charge/ Hole (kg)	0.650	0.650	0.650	0.650
10	Maximum Charge per delay (kg)	0.650	0.650	0.650	0.650
11	Total Charge / Blast (kg)	11.70	9.10	14.30	7.15
12	Initiation System	Nonel	Nonel	Nonel	Nonel
13	Initiation Pattern	Row to Row	Row to Row	Row to Row	Row to Row
14	Location of instrument	9°53.7320'N, 76°38.3815'E	9°53.7320'N, 76°38.3815'E	9°53.5840'N, 76°38.3087'E	9°53.5840'N, 76°38.3087'E
15	Distance (m)	115.9	115.9	301.9	301.9
16	PPV (mm/s)	0.999	0.885	NOT DETECTED	
17	AOP/ Noise (dB)	106.6	113.4		
18	Dominant Frequency (Hz)	60.50	111.3		

Table 2: Monitored Blast details

S. No	Description	Blast No. 9	Blast No. 10	Blast No. 11	Blast No. 11
1	Date of Blast	07.03.2025	07.03.2025	07.03.2025	07.03.2025
2	Time of Blasts (Hours)	12:35:58	12:37:26	12:50:47	12:52:47
3	Location of blasts	9°53.6832'N, 76°38.4408'E	9°53.6832'N, 76°38.4408'E	9°53.6663'N, 76°38.4449'E	9°53.6663'N, 76°38.4449'E
4	Diameter of blast hole (mm)	33	33	33	33
5	Burden (m)	1.0	1.0	1.0	1.0
6	Spacing (m)	1.2	1.2	1.2	1.2
7	Depth of blast hole (m)	1.8	1.8	1.8	1.8
8	No of blast holes	24	26	26	24
9	Explosive charge/ Hole (kg)	0.450	0.450	0.450	0.450
10	Maximum Charge per delay (kg)	0.450	0.450	0.450	0.450
11	Total Charge / Blast (kg)	10.80	11.70	11.70	10.80
12	Initiation System	Nonel	Nonel	Nonel	Nonel
13	Initiation Pattern	Row to Row	Row to Row	Row to Row	Row to Row
14	Location of instrument	9°53.7580'N, 76°38.4933'E	9°53.7580'N, 76°38.4933'E	9°53.8092'N, 76°38.6893'E	9°53.8092'N, 76°38.6893'E
15	Distance (m)	168.0	168.0	518.0	518.0
16	PPV (mm/s)	0.233	0.327	NOT DETECTED	NOT DETECTED
17	AOP/ Noise (dB)	108.5	108.2		
18	Dominant Frequency (Hz)	149.3	160.8		

Summary of the Blast Monitoring:

Monitoring Station	Blast Points	Distance (m)	Max Charge Per Delay (Kg)	PPV (mm/s)	AOP/Noise (dB)	Dominant Frequency (Hz)
M1	Blast No 1	64.7	0.650	3.402	115.6	141.3
	Blast No 2	64.7	0.650	3.845	121.6	88.25
	Blast No 3	64.7	0.650	3.034	111.0	65.50
M2	Blast No 4	115.9	0.650	1.149	109.3	41.25
	Blast No 5	115.9	0.650	0.999	106.6	60.50
	Blast No 6	115.9	0.650	0.885	113.4	111.3
	Blast No 7	301.9	0.650	Not detected		
	Blast No 8	301.9	0.650			
	Blast No 9	168.0	0.450	0.233	108.5	149.3
	Blast No 10	168.0	0.450	0.327	108.2	160.8
	Blast No 11	518.0	0.450	Not detected		
	Blast No 12	518.0	0.450			

Table 3: Summary of the Blast monitoring

From the Table 3, it can be observed that the highest peak Particle velocity (PPV) recorded was 3.845 mm/sec at the distance of 64.7 m in Blast No 2 and the next highest PPV was 3.402 mm/sec at the distance of 64.7 m in Blast No 1.

The ground vibrations were not recorded in the Buildings/Structures not belonging to Owner. Thus, the Ground Vibration values were within the Permissible limits standards as mentioned by DGMS [*Technical Circular: 7/1997*].

Use of Nonel detonating system provided required delay time to reduce the maximum charge per delay, which helped in controlling ground vibrations within permissible limits. The highest noise level of 121.6 dB was recorded at the distance of 64.7 m from blast location in blast No. 2 and the next highest noise level was 115.6 dB at the distance of 64.7 m from blast location in Blast No 1. The noise levels were not detected while monitoring at the nearby two houses.

Fly rocks another serious problem associated with blasting operations. It was observed to a distance of 30 m from blast site without muffling arrangement and with muffling the fly rocks was within 5m. This is also due to free face available in all the blasts and also the proper delay timing followed using shock tube detonators.

Remarks: *It may therefore, be concluded that the intensity of ground vibrations, Noise and fly rock caused due to blasting operations carried out in Granite Building Stone quarry of Shri. George Kochuparambil in Re-survey Block no 11 & Re-survey no. 354/4, 354/5, 355/1pt, 351/1pt, 350, 352/1pt of Manakkad Village, Thodupuzha Taluk, Idukki District, Kerala., are within Permissible limit as per the standards prescribed by DGMS (Technical Circular No: 7/1997).*

RECOMMENDATIONS

Blasting operations may be conducted in the Granite Building stone quarry of Shri. George Kochuparambil in Re-Survey Block No 11 and Re-survey No. 354/1, 354/5, 355/1pt, 350, 352/1pt over an extent of 12.2987Ha in Manakkad Village, Thodupuzha taluk, Idukki District, Kerala. With the following recommendations:

1. Blasts may be conducted with a maximum of 25 holes in a blast round using 33 mm diameter blast holes drilled with hand held jackhammer drills to a maximum depth of 8 feet (2.4 m), each hole charged with maximum of 650 gm of explosive.
2. NONEL detonator & Surface Trunk Line Delay (STLD) may be used for initiation.
3. Blasts to be conducted by a Competent Blaster or Mining Mate certificate holder only, following all the rules and regulations stipulated by Director General of Mines Safety (DGMS) and other regulating agencies.
4. If fly rock to be restricted to within 10m, muffling arrangement to be made.
5. Blasting methodology suggested in Table-4 may be followed
6. Blast layouts suggested in Fig No.18 may be used with the available initiation system.

All other rules and regulations imposed by various agencies like DGMS/ Dept. of Mining and Geology/ any other relevant organization to be followed from time to time.

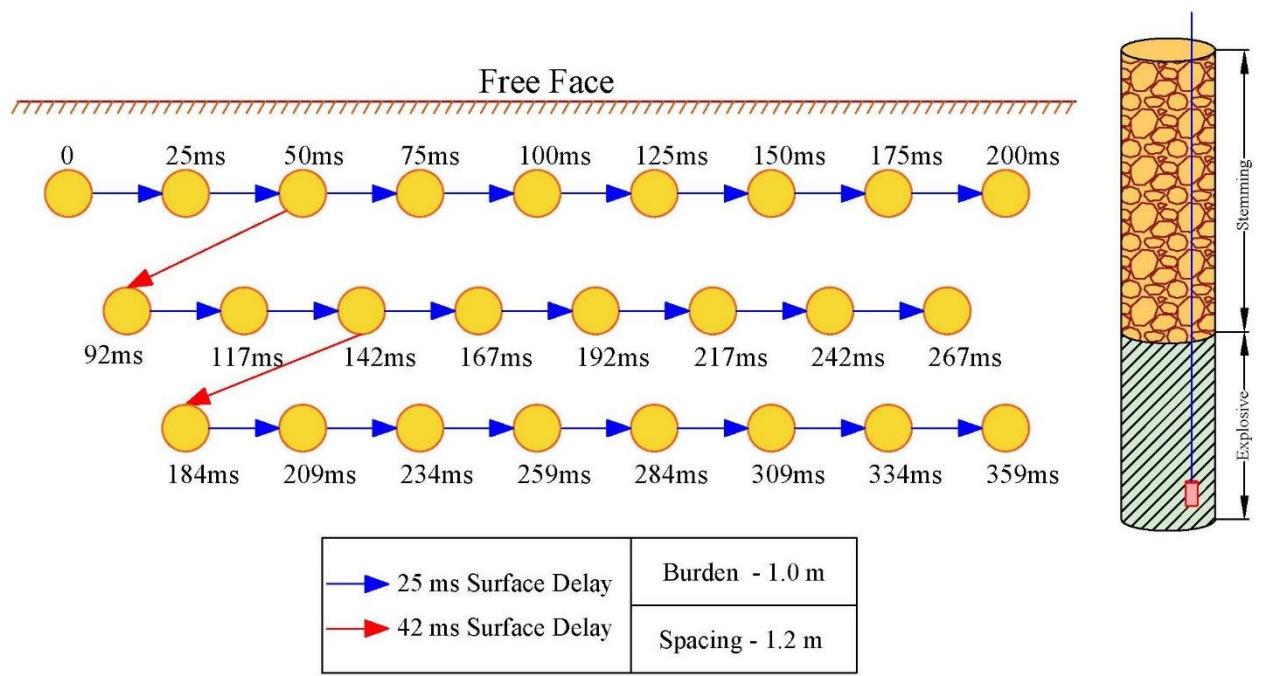


Fig 18: Recommended Blasthole pattern

Sl No	Parameters	Suggestion- I	Suggestion- II
1	Diameter of the Blast hole (mm)	33	33
2	Burden (m)	1.0	1.0
3	Spacing (m)	1.2	1.2
4	Depth of Blast hole (m)	1.80	2.40
5	No of Blast Holes	Maximum of 25	Maximum of 25
6	Explosive charge/ Hole (gm)	450	650
7	Maximum charge/ Delay (gm)	450	650
8	Total charge/ Blast (kg)	11.25	16.25
9	Initiation system	Short delay detonators	Short delay detonators
10	Initiation Pattern	Row by row	Row by row
11	Delay timing between any two blast holes	At least 25ms	At least 25ms
12	Delay timing between any two blast holes	At least 42ms	At least 42ms
12	No. of rows	Maximum of 3	Maximum of 3

Table 4: Blasting recommendations

Cyriac Joseph,

Managing Partner & EIA Coordinator,
Global Environment & Mining Services.

BIBLIOGRAPHY

ISEE, Blaster's Hand Book (1998)

Anon, (1997), "Damage of structures due to blast induced ground vibrations in the mining areas", DGMS (Tech) (S&T) Circular No.7 of 1997 dated 29.08.1997

Siskind, D.E., et al, (1980), "Structure response and damage produced by air blast from surface mining", USBM RI 8485.

Indian Standard (2001), "Method for blast vibration monitoring. Int J Rock Mech MinSciGeomechAbstr;29(2):145-6


<http://www.vulcanhammer.net/svinkin/prediction.php>

<http://terrock.com.au/vibration/blasting.html>


APPENDIX – I

(LAYOUTS OF BLASTS STUDIED)

Layout of Blast No: 1

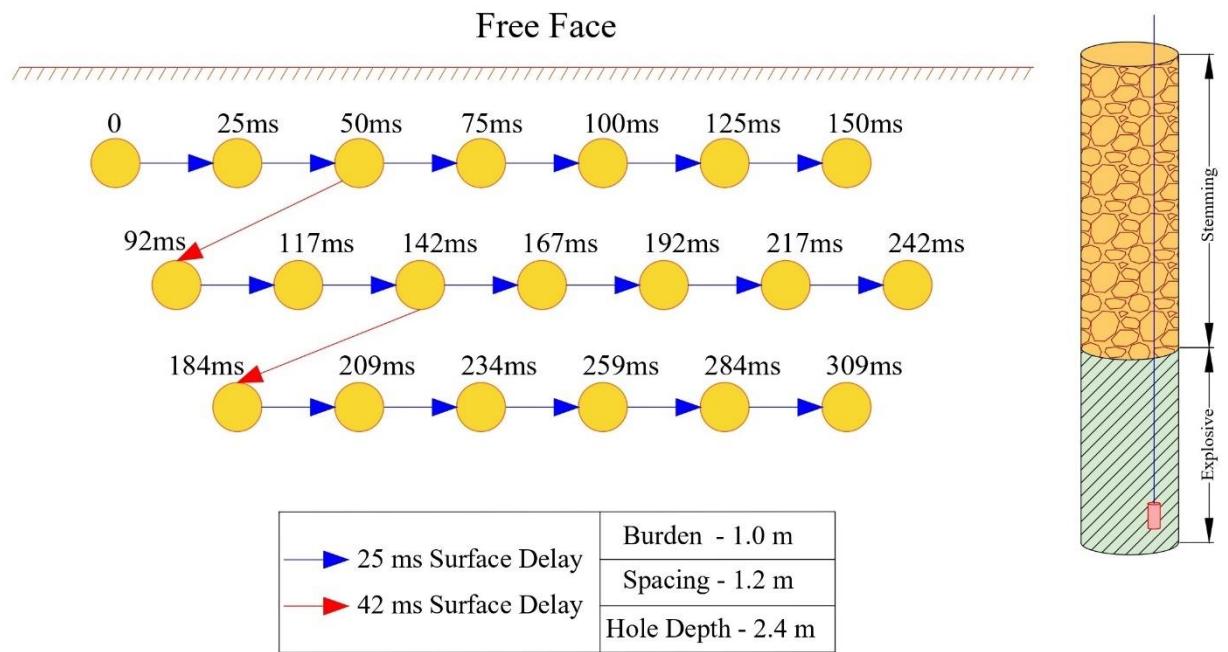


Layout of Blast No: 2

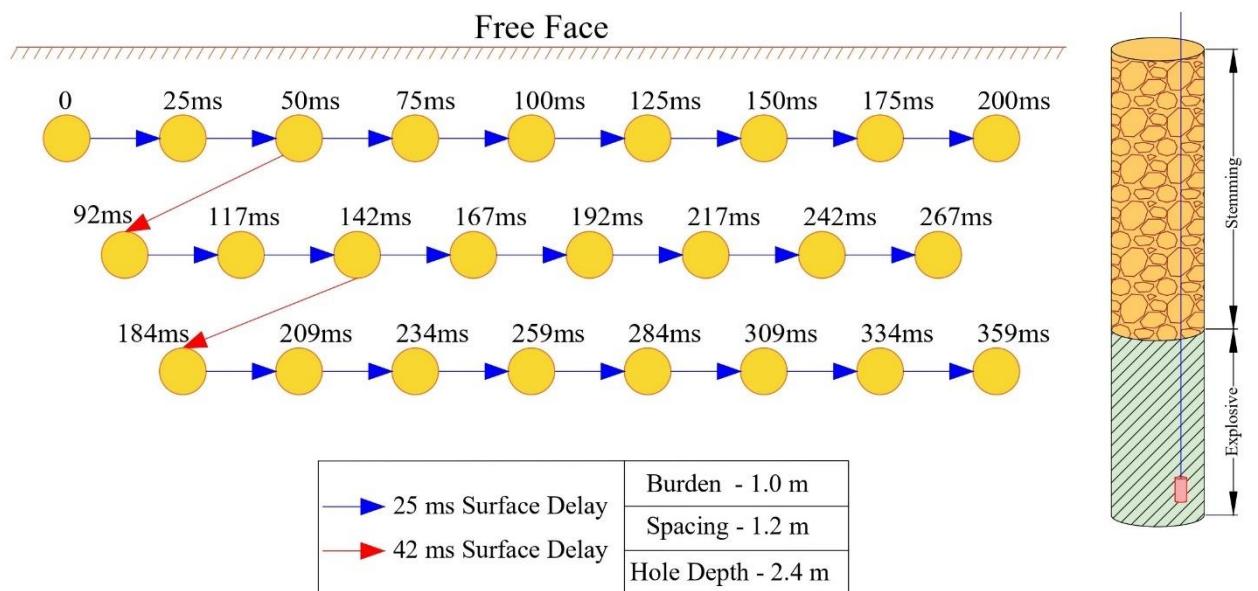


Layout of Blast No: 3

Free Face

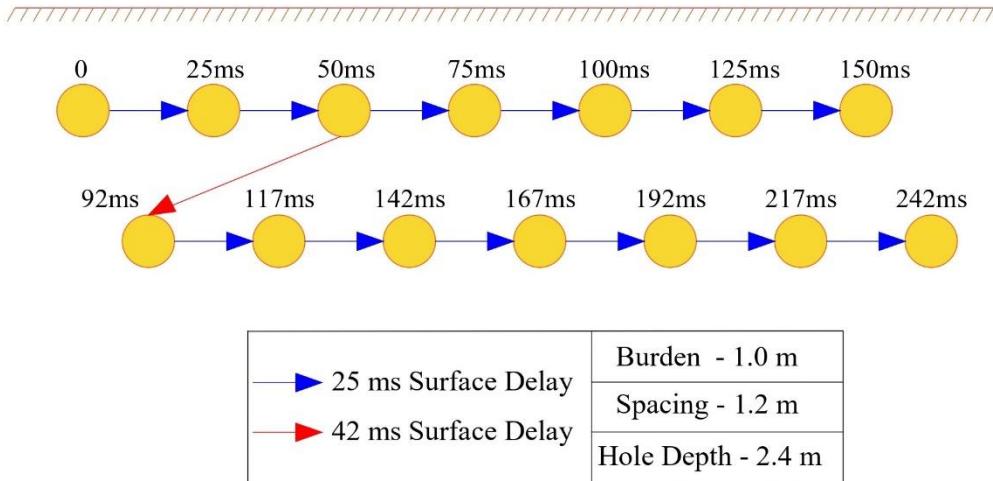


Layout of Blast No: 4

Free Face

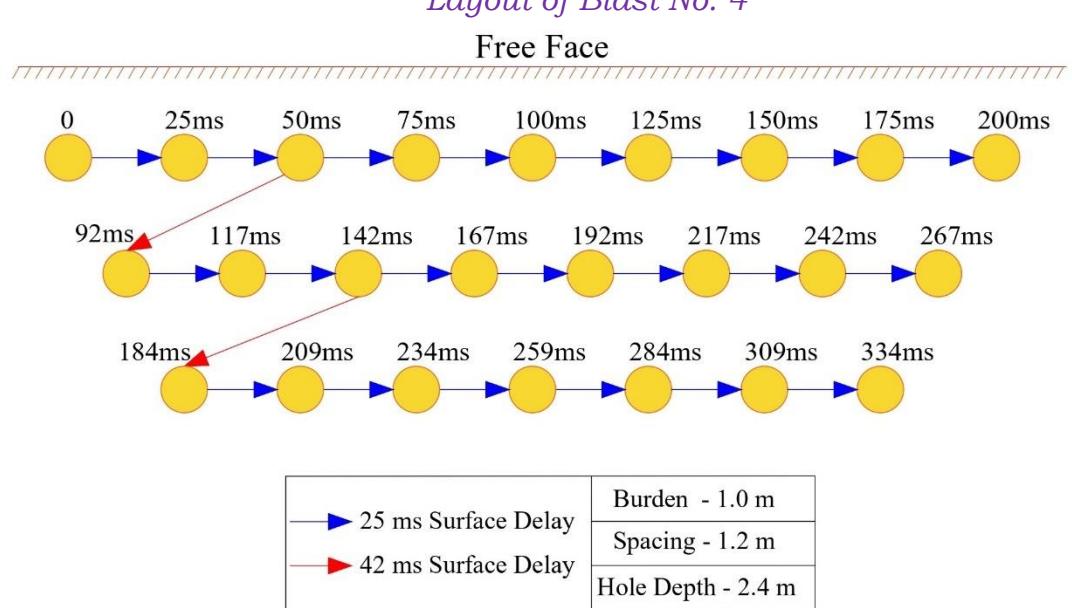


Layout of Blast No: 5

Free Face

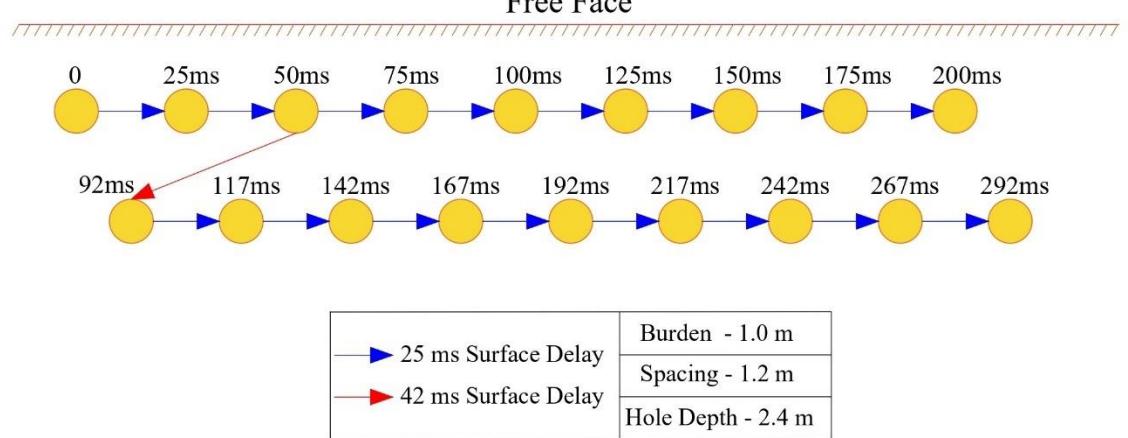


Layout of Blast No: 6

Free Face

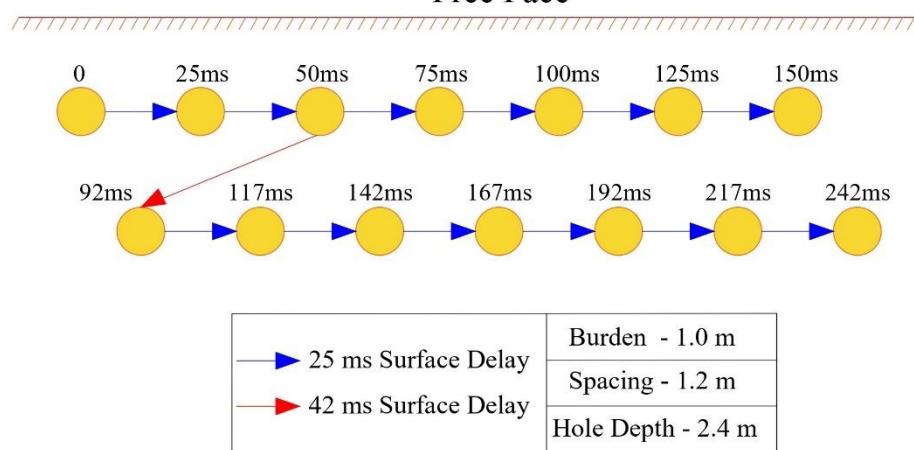


Layout of Blast No: 7

Free Face

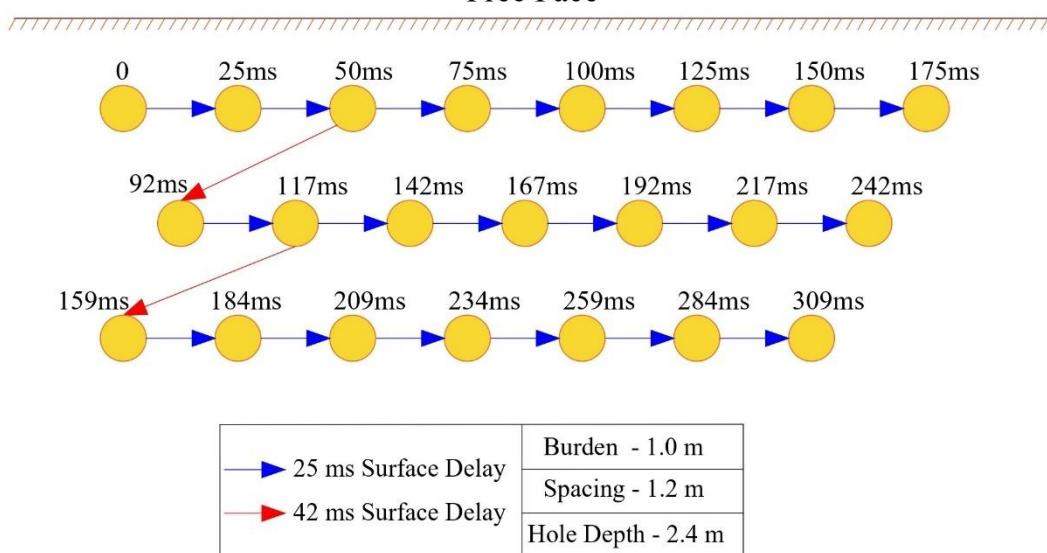


Layout of Blast No: 8


Free Face

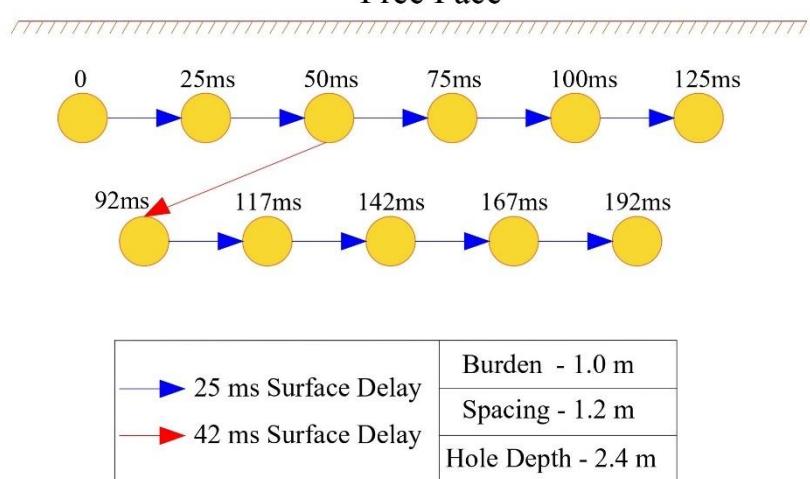


Layout of Blast No: 9

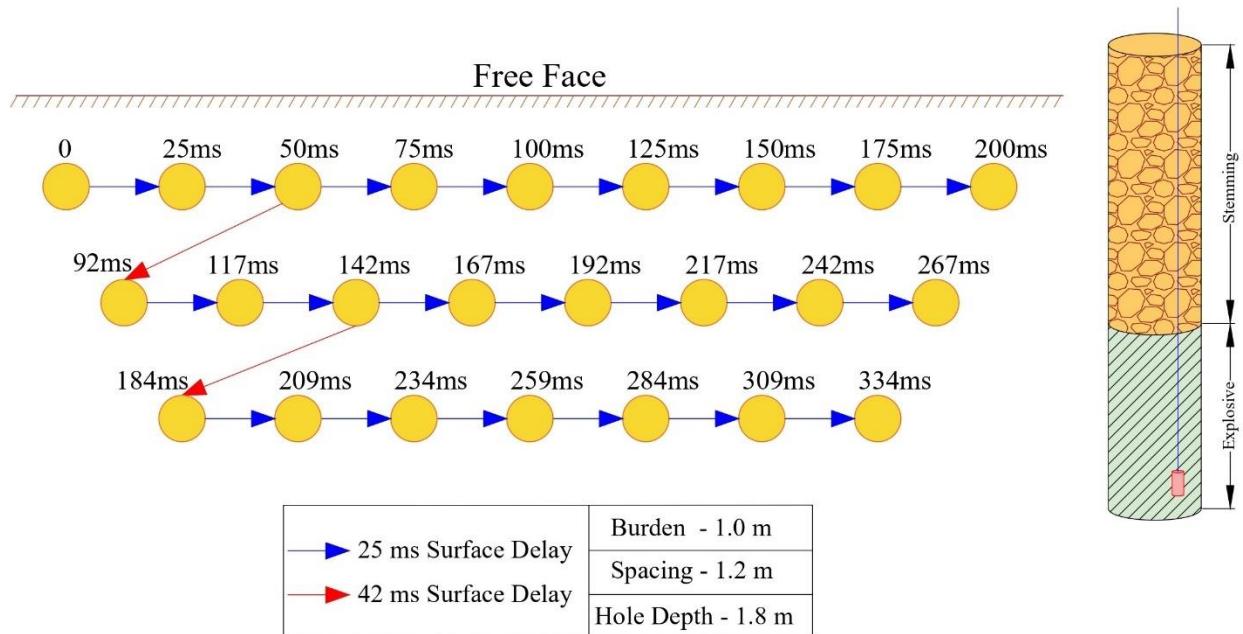


Layout of Blast No: 10

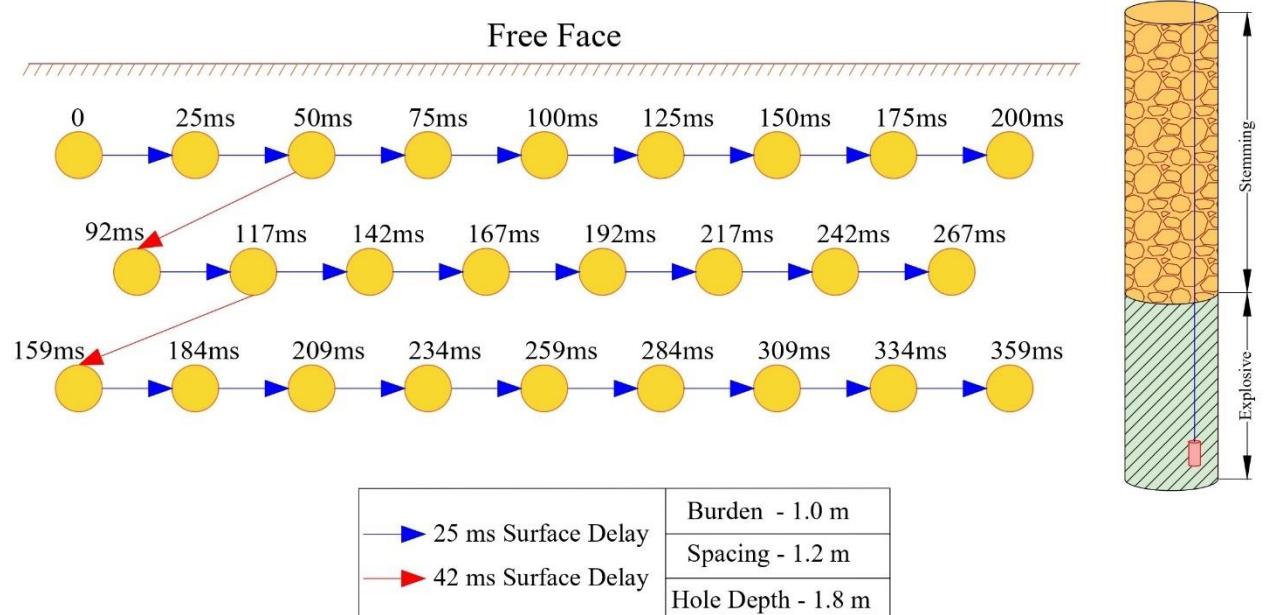

Layout of Blast No: 11

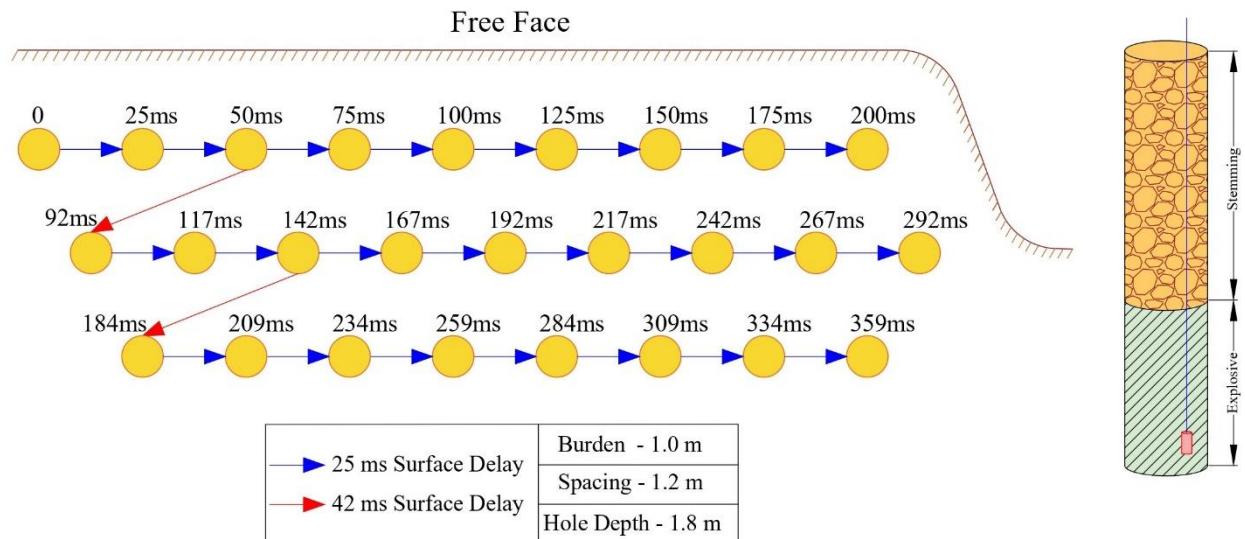

Layout of Blast No: 12

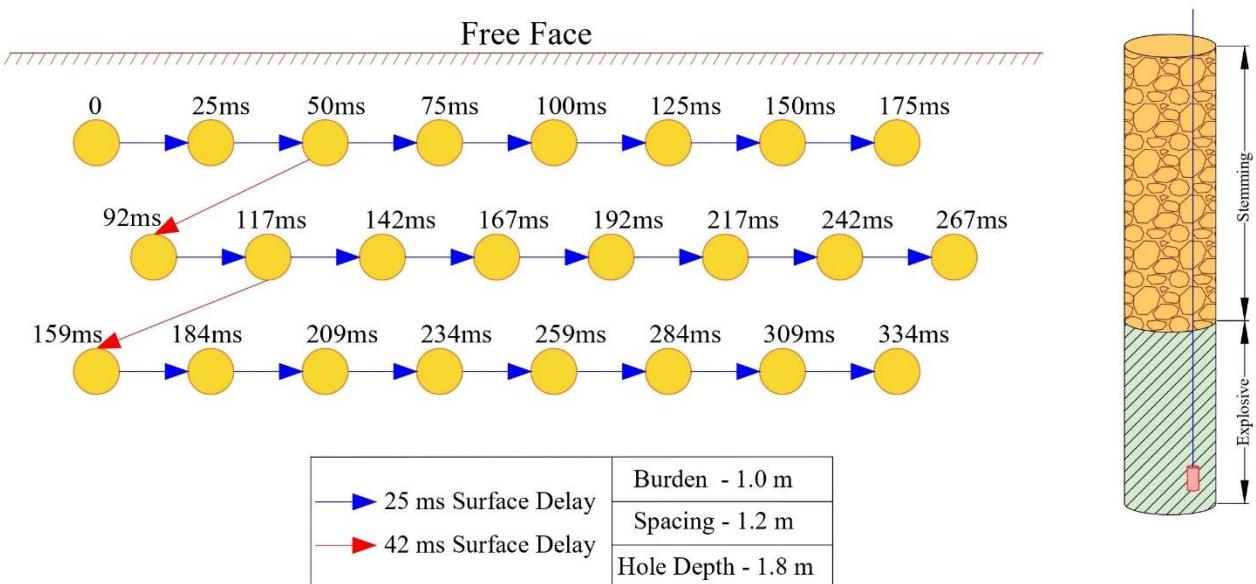

APPENDIX – II

(BLAST EVENT REPORTS)

Date/Time: Vert at 09:32:45 March 7, 2025
 Trigger Source: Geo: 0.127 mm/s, Mic: 100.00 dB(L)
 Range: Geo: 254.0 mm/s
 Record Time: 3.0 sec at 2048 sps
 Job Number: 1
 Operator/Setup: Operator/factory.MMB


Serial Number: UM18455 V 10-90FB Micromate ISEE
 Battery Level: 3.8 Volts
 Unit Calibration: January 6, 2025 by UES New Delhi
 File Name: UM18455_20250307093245.IDFW
 Scaled Distance: 77.3 (64.7 m, 0.7 kg)

Notes
 Location: STATION-1
 Client: GEORGE KOCHUPARAMBIL
 User Name: GLOBAL ENVIRONMENT AND MINING SERVICES
 General:


Microphone: Linear Weighting
 PSPL: 115.6 dB(L) at 0.263 sec
 ZC Freq: 9.1 Hz
 Channel Test: Passed (Freq = 19.7 Hz Amp = 1176 mv)

	Tran	Vert	Long	
PPV	2.767	3.066	2.412	mm/s
ZC Freq	102	171	7.7	Hz
Time (Rel. to Trig)	0.122	0.177	0.229	sec
Peak Acceleration	0.199	0.331	0.189	g
Peak Displacement	0.083	0.003	0.079	mm
Sensor Check	Passed	Passed	Passed	
Frequency	7.7	7.3	7.3	Hz
Overswing Ratio	3.5	4.2	4.2	

Peak Vector Sum: 3.402 mm/s at 0.175 sec

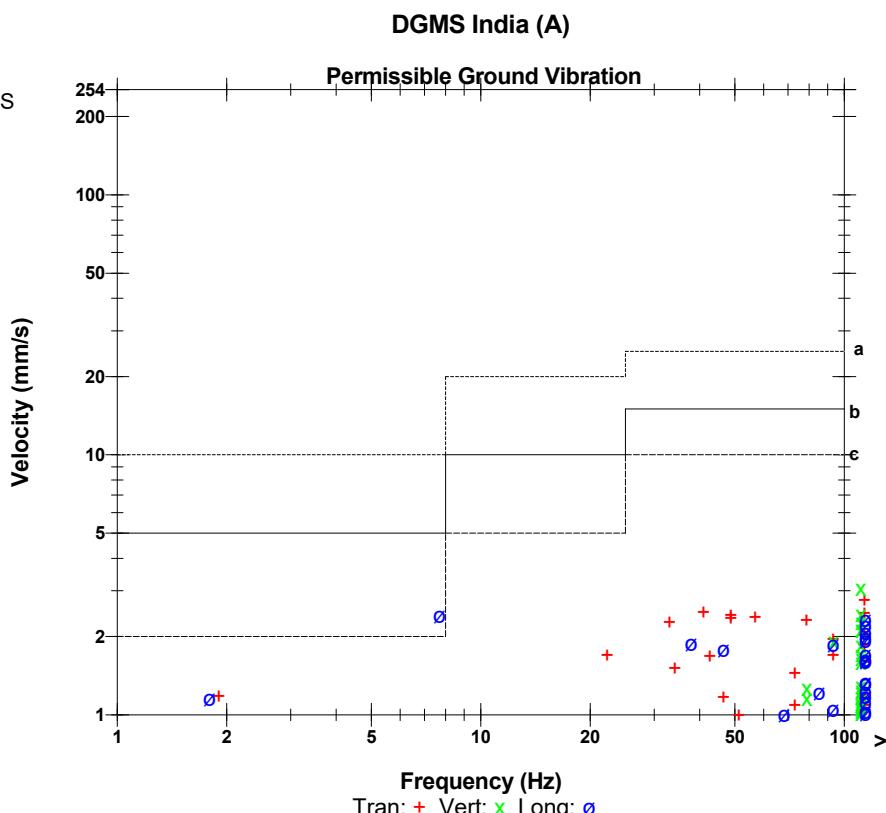

a) Industrial Buildings
 b) Domestic houses/structures
 c) Historic objects, sensitive structures

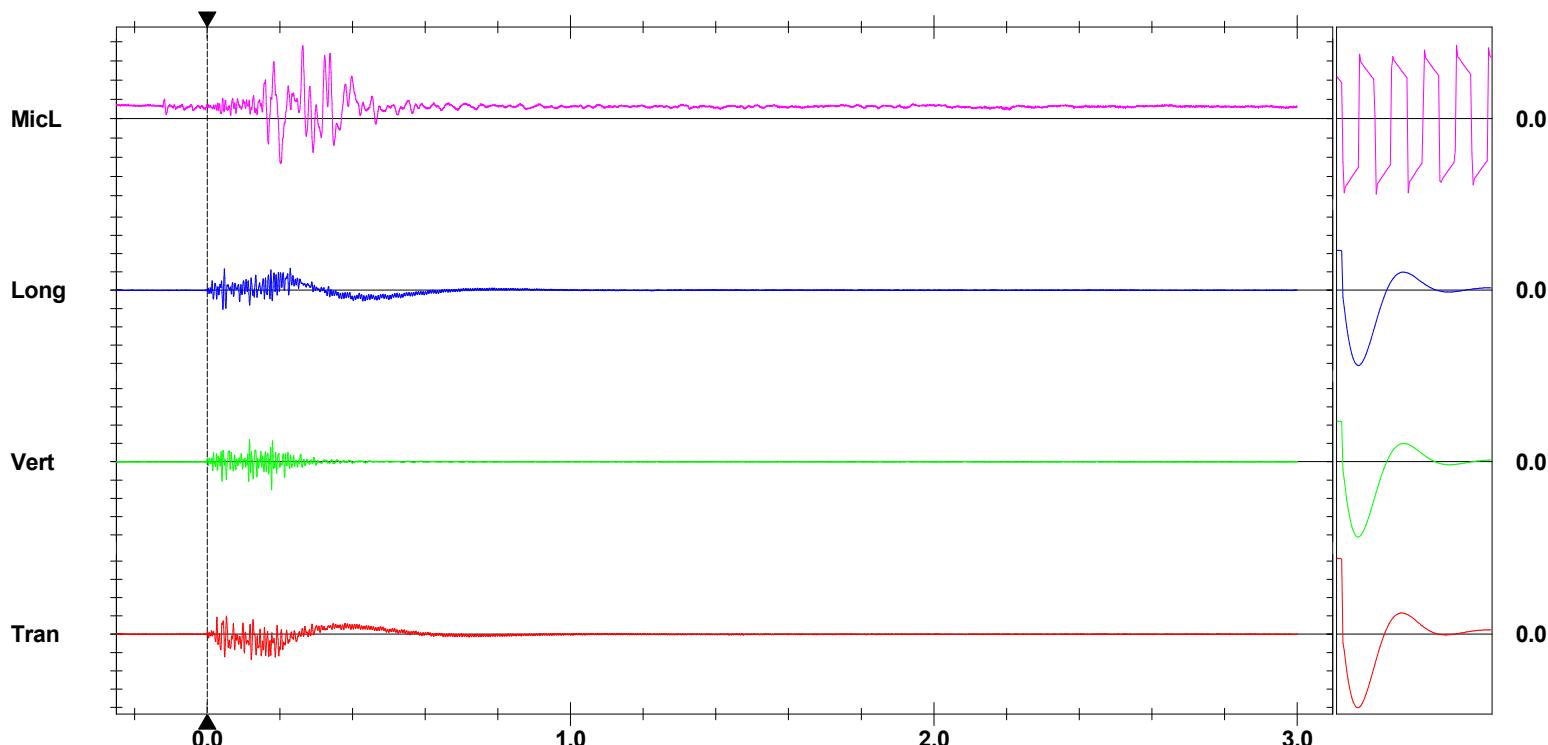

Time Scale: 0.20 sec/div Amplitude Scale: Geo: 2.000 mm/s/div Mic: 1.000 pa.(L)/div
 Trigger = ►—————◀

Sensor Check


Date/Time Vert at 09:32:45 March 7, 2025
Trigger Source Geo: 0.127 mm/s, Mic: 100.00 dB(L)
Range Geo: 254.0 mm/s
Record Time 3.0 sec at 2048 sps
Job Number: 1
Operator/Setup: Operator/factory.MMB

Serial Number UM18455 V 10-90FB Micromate ISEE
Battery Level 3.8 Volts
Unit Calibration January 6, 2025 by UES New Delhi
File Name UM18455_20250307093245.IDFW
Scaled Distance 77.3 (64.7 m, 0.7 kg)


Notes

Location: STATION-1
 Client: GEORGE KOCHUPARAMBIL
 User Name: GLOBAL ENVIRONMENT AND MINING SERVICES
 General:


Tran Dominant Frequency = 2.000 Hz., Amplitude = 0.137, PPV from Event = 2.767 mm/s

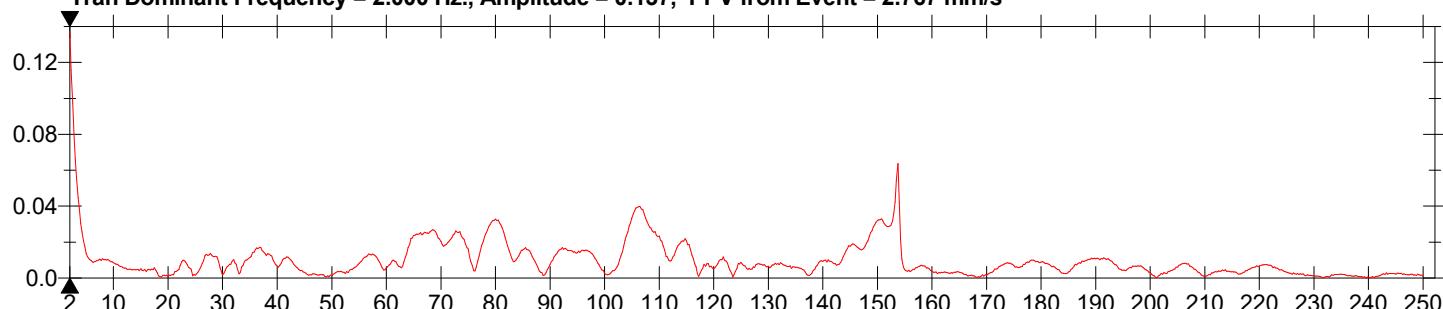


Vert Dominant Frequency = 141.3 Hz., Amplitude = 0.036, PPV from Event = 3.066 mm/s

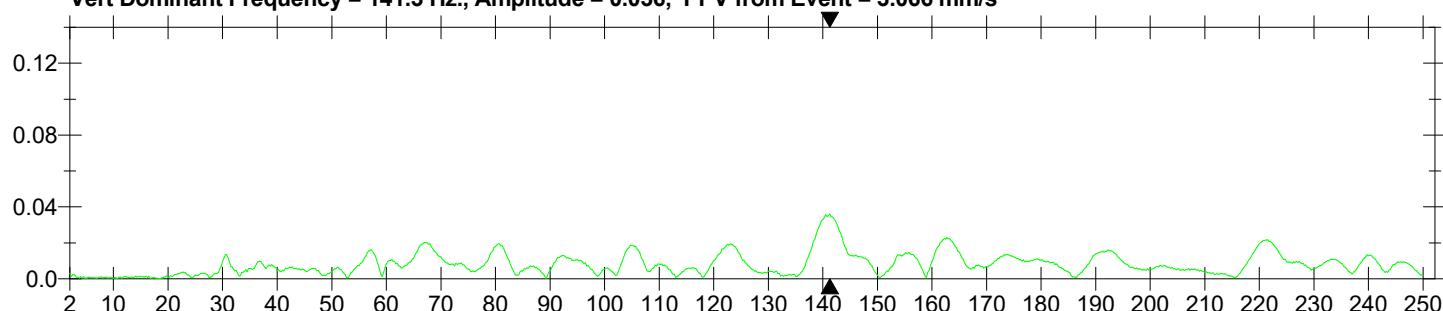

Long Dominant Frequency = 2.000 Hz., Amplitude = 0.124, PPV from Event = 2.412 mm/s

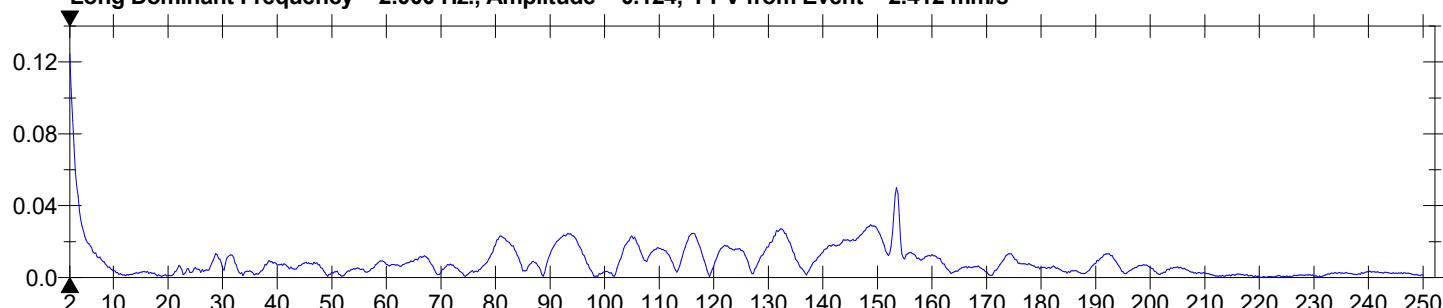

MicL Dominant Frequency = 12.50 Hz., Amplitude = 0.083, PSPL From Event = 115.6 dB(L)

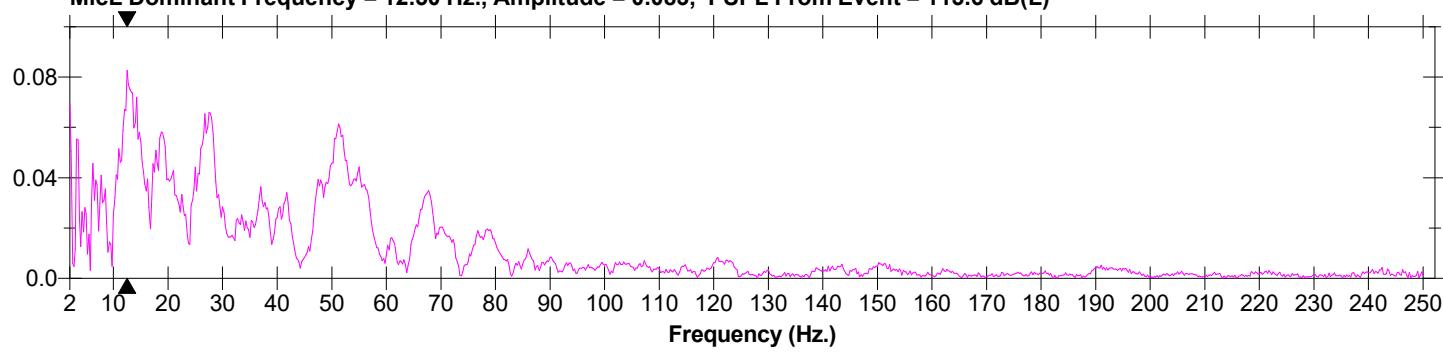

Date/Time MicL at 09:33:50 March 7, 2025
Trigger Source Geo: 0.127 mm/s, Mic: 100.00 dB(L)
Range Geo: 254.0 mm/s
Record Time 3.0 sec at 2048 sps
Job Number: 1
Operator/Setup: Operator/factory.MMB



Serial Number UM18455 V 10-90FB Micromate ISEE
Battery Level 3.8 Volts
Unit Calibration January 6, 2025 by UES New Delhi
File Name UM18455_20250307093350.IDFW
Scaled Distance 77.3 (64.7 m, 0.7 kg)

Notes
Location: STATION- 1
Client: GEORGE KOCHUPARAMBIL
User Name: GLOBAL ENVIRONMENT AND MINING SERVICES
General:

Microphone Linear Weighting
PSPL 121.6 dB(L) at 0.477 sec
ZC Freq 43 Hz
Channel Test Passed (Freq = 19.7 Hz Amp = 1184 mv)

	Tran	Vert	Long	
PPV	1.545	3.563	1.561	mm/s
ZC Freq	146	146	146	Hz
Time (Rel. to Trig)	0.234	0.248	0.271	sec
Peak Acceleration	0.220	0.332	0.165	g
Peak Displacement	0.002	0.003	0.005	mm
Sensor Check	Passed	Passed	Passed	
Frequency	7.5	7.5	7.3	Hz
Overswing Ratio	3.9	4.1	4.2	

Peak Vector Sum 3.845 mm/s at 0.248 sec

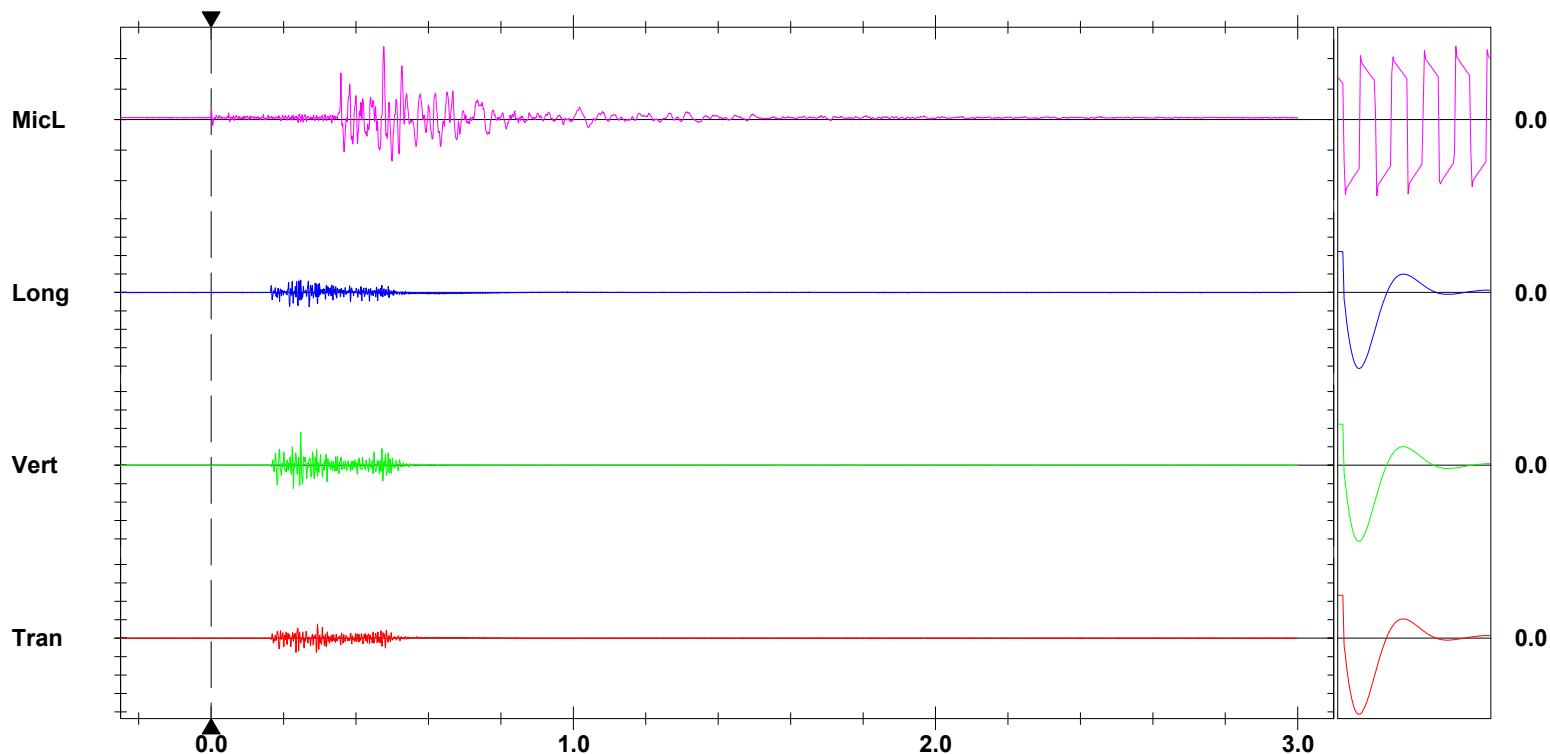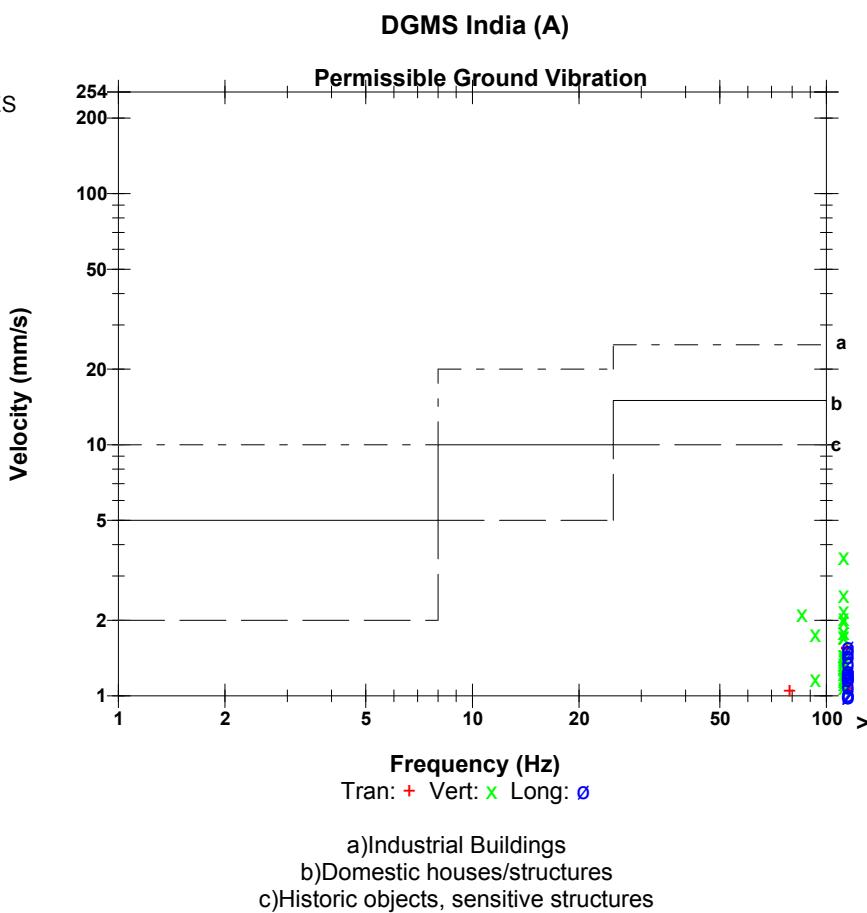

Time Scale: 0.20 sec/div **Amplitude Scale:** Geo: 2.000 mm/s/div Mic: 10.000 pa.(L)/div
Trigger = ► — ◀


Sensor Check

Date/Time MicL at 09:33:50 March 7, 2025
Trigger Source Geo: 0.127 mm/s, Mic: 100.00 dB(L)
Range Geo: 254.0 mm/s
Record Time 3.0 sec at 2048 sps
Job Number: 1
Operator/Setup: Operator/factory.MMB

Serial Number UM18455 V 10-90FB Micromate ISEE
Battery Level 3.8 Volts
Unit Calibration January 6, 2025 by UES New Delhi
File Name UM18455_20250307093350.IDFW
Scaled Distance 77.3 (64.7 m, 0.7 kg)

Notes

Location: STATION- 1
Client: GEORGE KOCHUPARAMBIL
User Name: GLOBAL ENVIRONMENT AND MINING SERVICES
General:

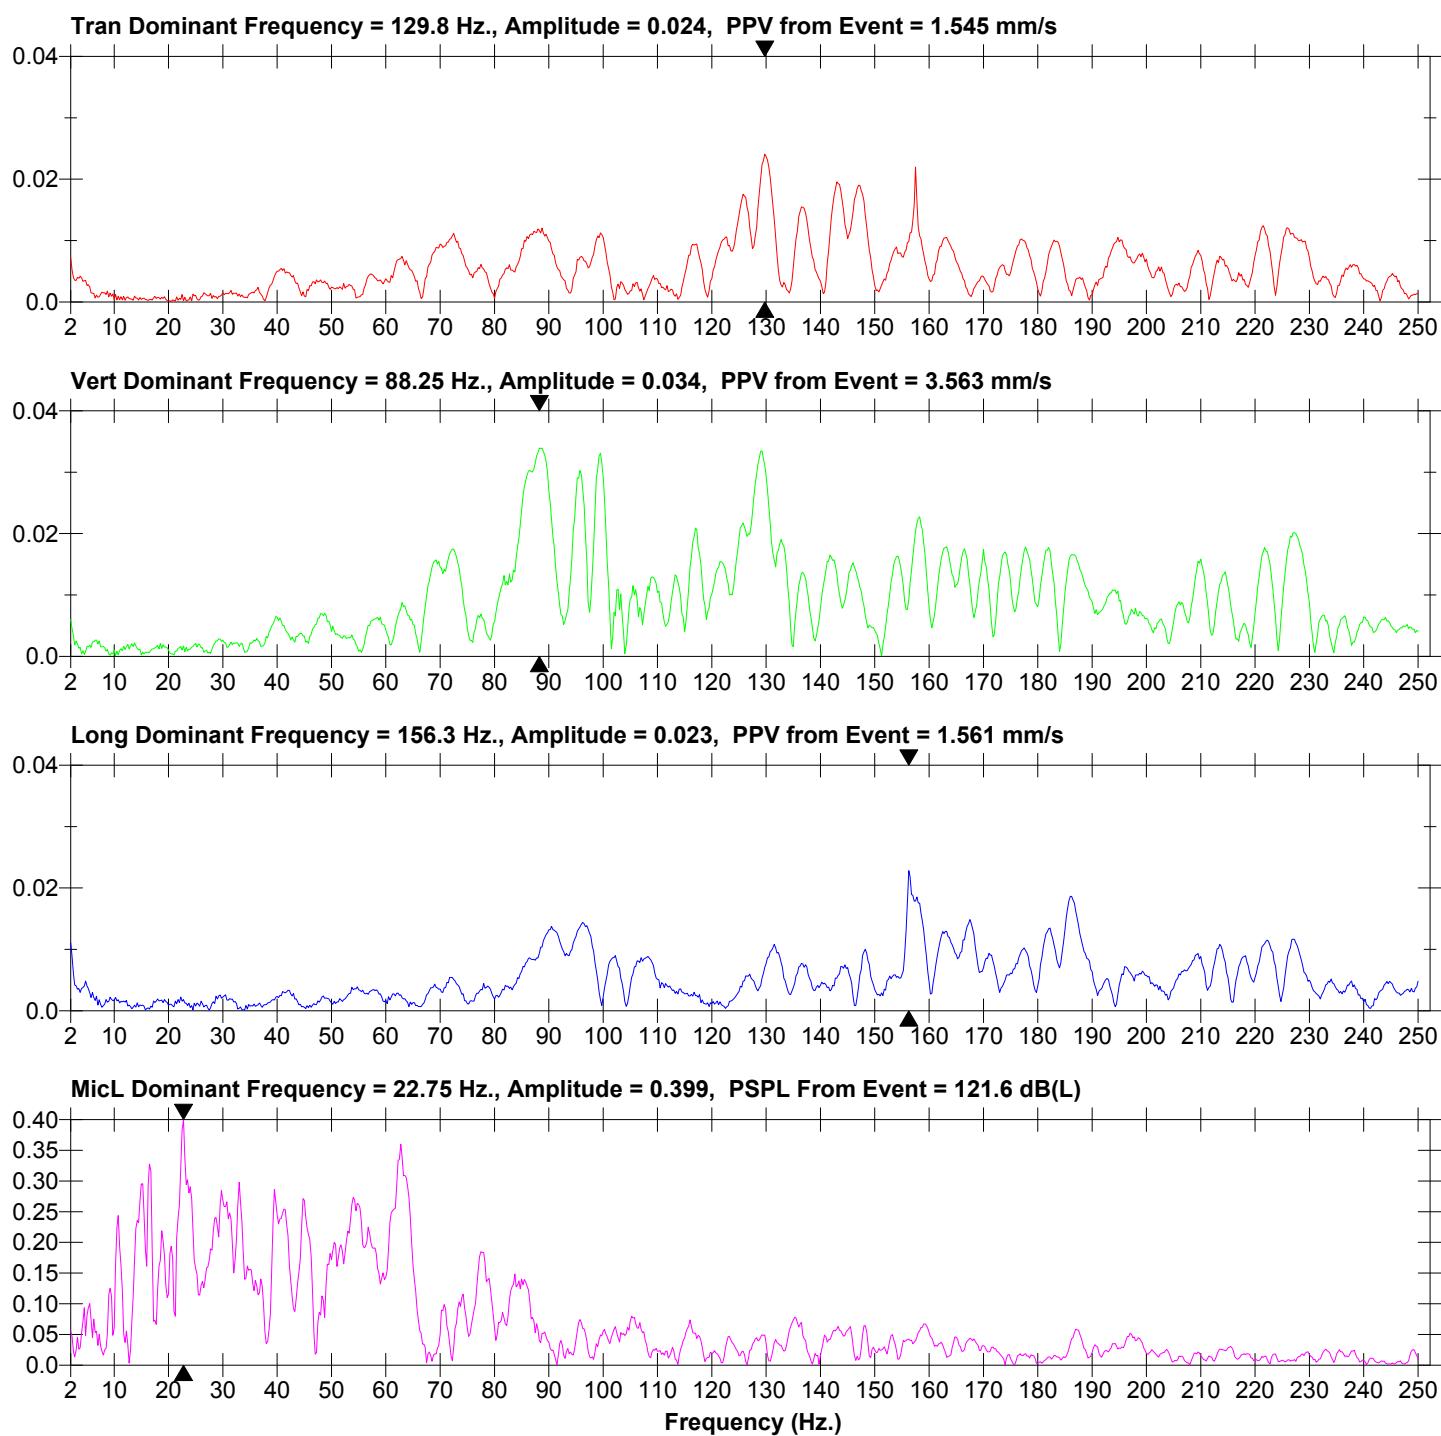

Date/Time: Vert at 09:35:20 March 7, 2025
 Trigger Source: Geo: 0.127 mm/s, Mic: 100.00 dB(L)
 Range: Geo: 254.0 mm/s
 Record Time: 3.0 sec at 2048 sps
 Job Number: 1
 Operator/Setup: Operator/factory.MMB


Serial Number: UM18455 V 10-90FB Micromate ISEE
 Battery Level: 3.8 Volts
 Unit Calibration: January 6, 2025 by UES New Delhi
 File Name: UM18455_20250307093520.IDFW
 Scaled Distance: 77.3 (64.7 m, 0.7 kg)

Notes
 Location: STATION-1
 Client: GEORGE KOCHUPARAMBIL
 User Name: GLOBAL ENVIRONMENT AND MINING SERVICES
 General:


Microphone: Linear Weighting
 PSPL: 111.1 dB(L) at 0.385 sec
 ZC Freq: 16.5 Hz
 Channel Test: Passed (Freq = 19.7 Hz Amp = 1201 mv)

	Tran	Vert	Long	
PPV	2.443	2.160	1.655	mm/s
ZC Freq	64	68	64	Hz
Time (Rel. to Trig)	0.101	0.146	0.183	sec
Peak Acceleration	0.094	0.115	0.066	g
Peak Displacement	0.006	0.005	0.004	mm
Sensor Check	Passed	Passed	Passed	
Frequency	7.3	7.3	7.3	Hz
Overswing Ratio	4.1	4.2	4.1	

Peak Vector Sum: 3.034 mm/s at 0.101 sec

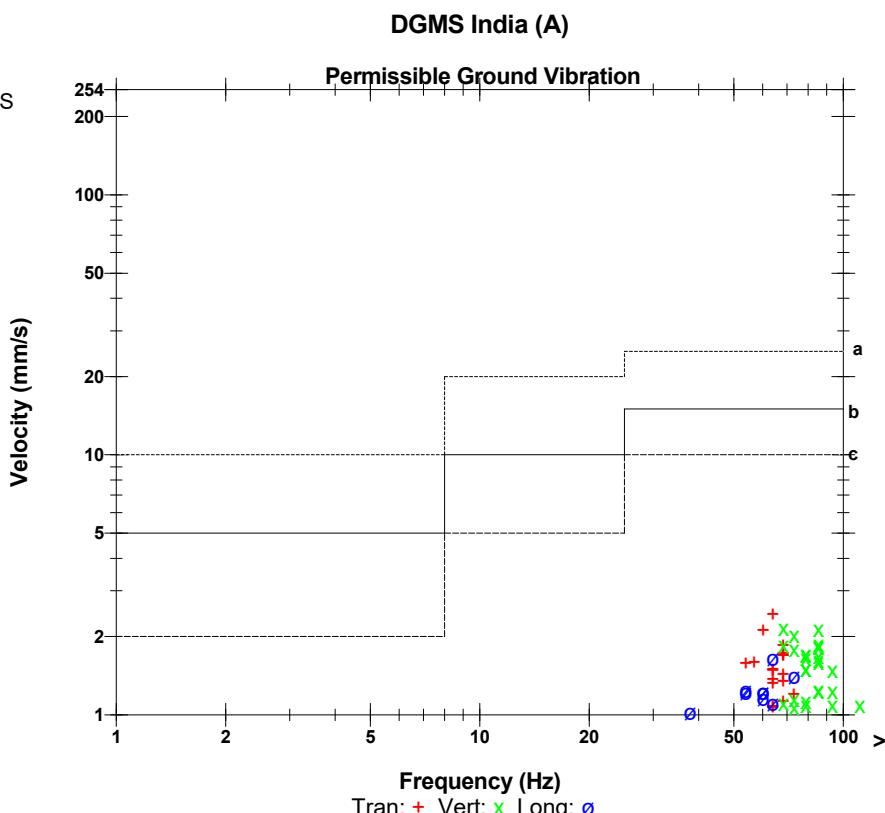

a) Industrial Buildings
 b) Domestic houses/structures
 c) Historic objects, sensitive structures

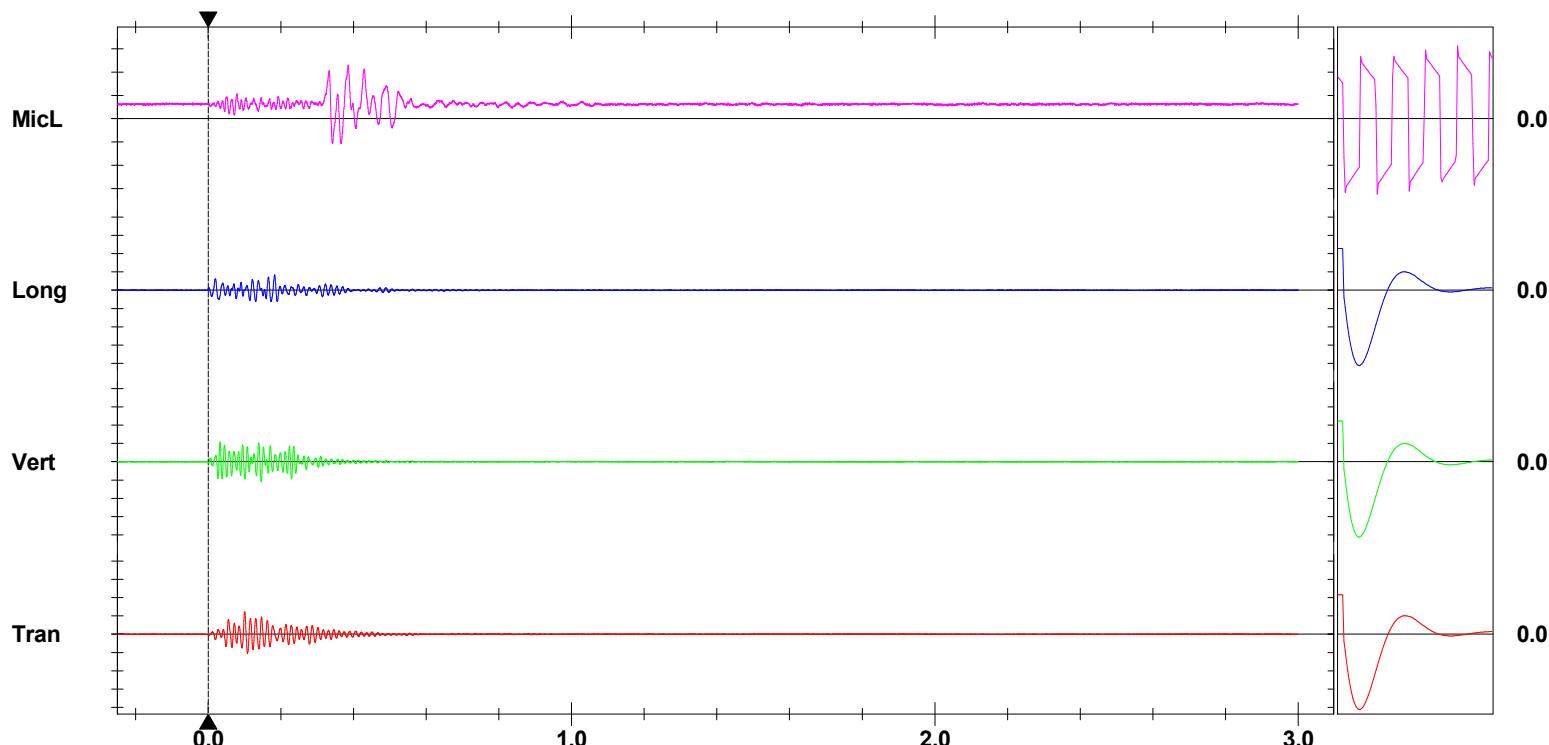

Time Scale: 0.20 sec/div Amplitude Scale: Geo: 2.000 mm/s/div Mic: 1.000 pa.(L)/div
 Trigger = ►—————◀


Sensor Check

Date/Time Vert at 09:35:20 March 7, 2025
Trigger Source Geo: 0.127 mm/s, Mic: 100.00 dB(L)
Range Geo: 254.0 mm/s
Record Time 3.0 sec at 2048 sps
Job Number: 1
Operator/Setup: Operator/factory.MMB

Serial Number UM18455 V 10-90FB Micromate ISEE
Battery Level 3.8 Volts
Unit Calibration January 6, 2025 by UES New Delhi
File Name UM18455_20250307093520.IDFW
Scaled Distance 77.3 (64.7 m, 0.7 kg)

Notes

Location: STATION-1
 Client: GEORGE KOCHUPARAMBIL
 User Name: GLOBAL ENVIRONMENT AND MINING SERVICES
 General:

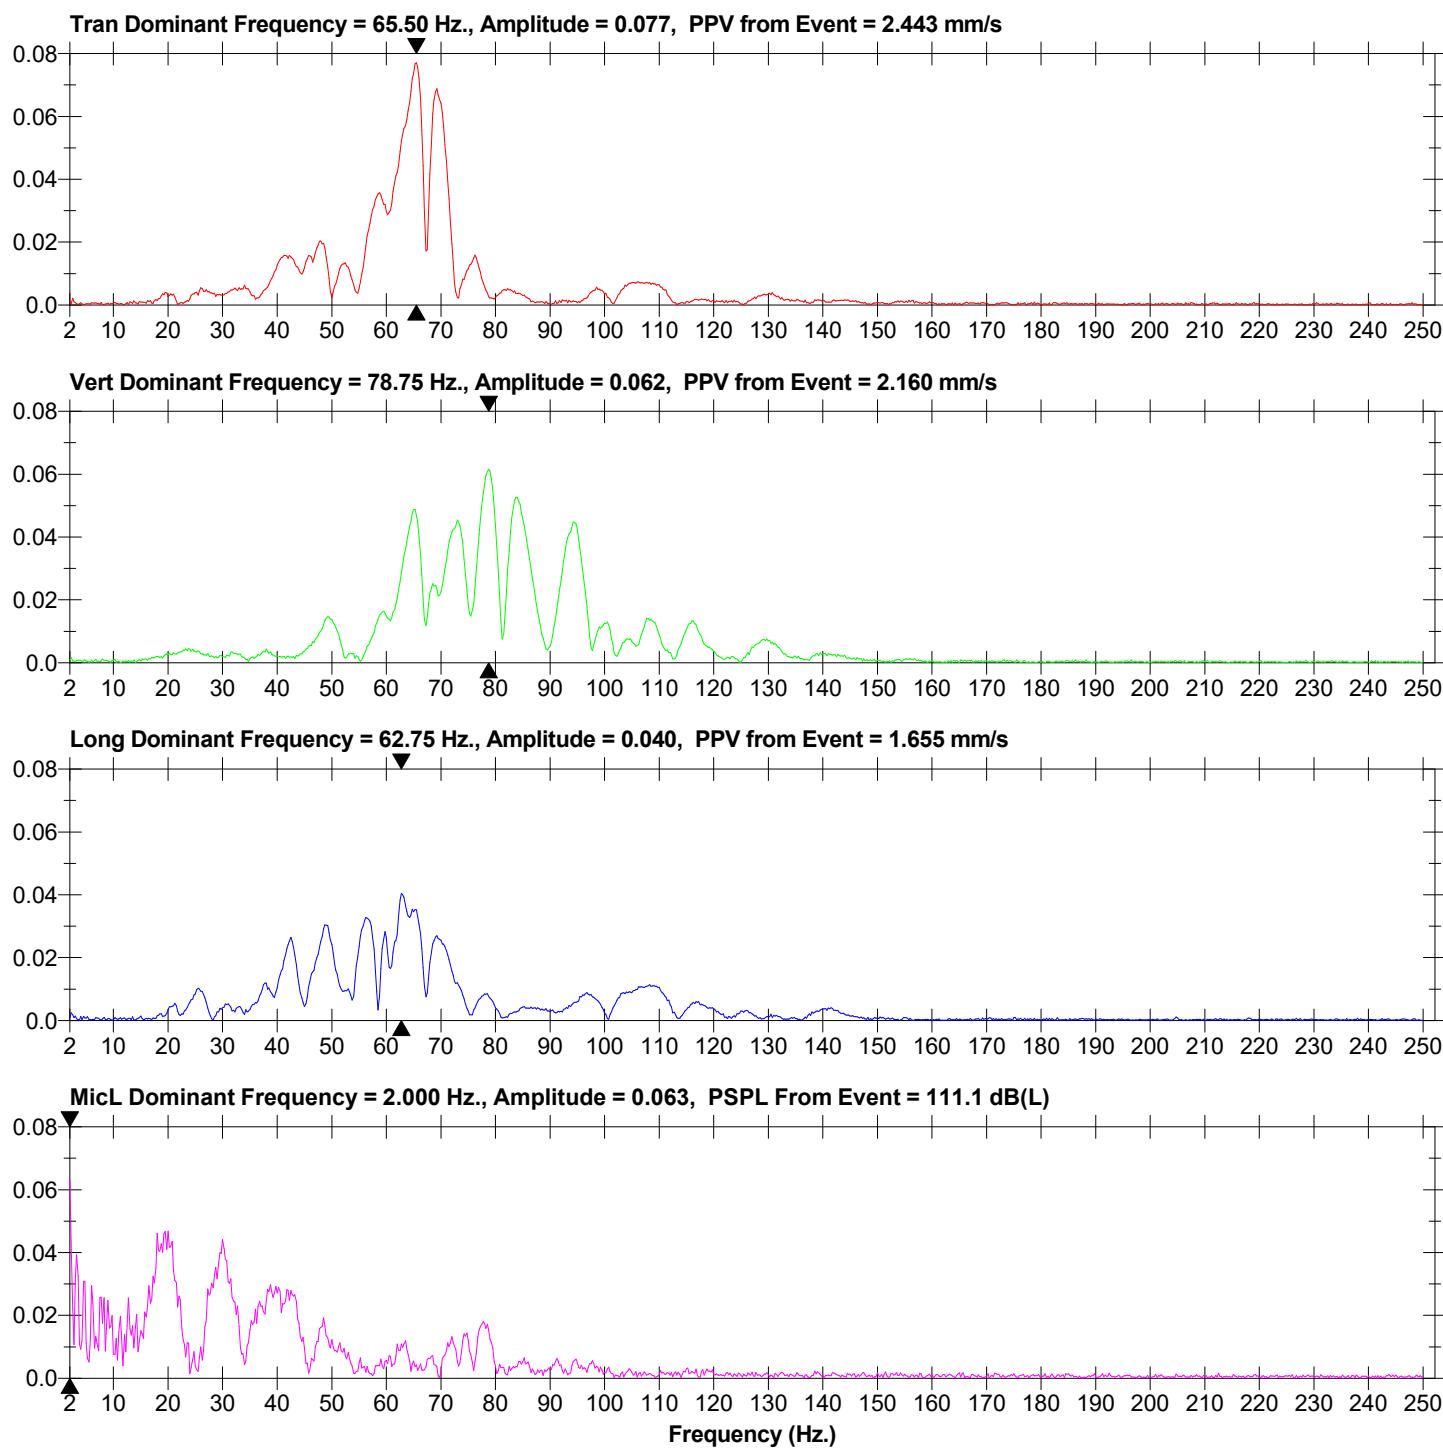

Date/Time Vert at 09:45:54 March 7, 2025
Trigger Source Geo: 0.127 mm/s, Mic: 100.00 dB(L)
Range Geo: 254.0 mm/s
Record Time 3.0 sec at 2048 sps
Job Number: 1
Operator/Setup: Operator/factory.MMB



Serial Number UM18455 V 10-90FB Micromate ISEE
Battery Level 3.8 Volts
Unit Calibration January 6, 2025 by UES New Delhi
File Name UM18455_20250307094554.IDFW
Scaled Distance 138.5 (115.9 m, 0.7 kg)

Notes
Location: STATION- 2
Client: GEORGE KOCHUPARAMBIL
User Name: GLOBAL ENVIRONMENT AND MINING SERVICES
General:

Microphone Linear Weighting
PSPL 109.3 dB(L) at 0.375 sec
ZC Freq 37 Hz
Channel Test Passed (Freq = 19.7 Hz Amp = 1162 mv)

	Tran	Vert	Long	
PPV	0.733	1.056	0.859	mm/s
ZC Freq	128	57	114	Hz
Time (Rel. to Trig)	0.048	0.278	0.178	sec
Peak Acceleration	0.064	0.054	0.066	g
Peak Displacement	0.001	0.003	0.001	mm
Sensor Check	Passed	Passed	Passed	
Frequency	7.3	7.3	7.5	Hz
Overswing Ratio	4.1	4.1	4.1	

Peak Vector Sum 1.149 mm/s at 0.278 sec

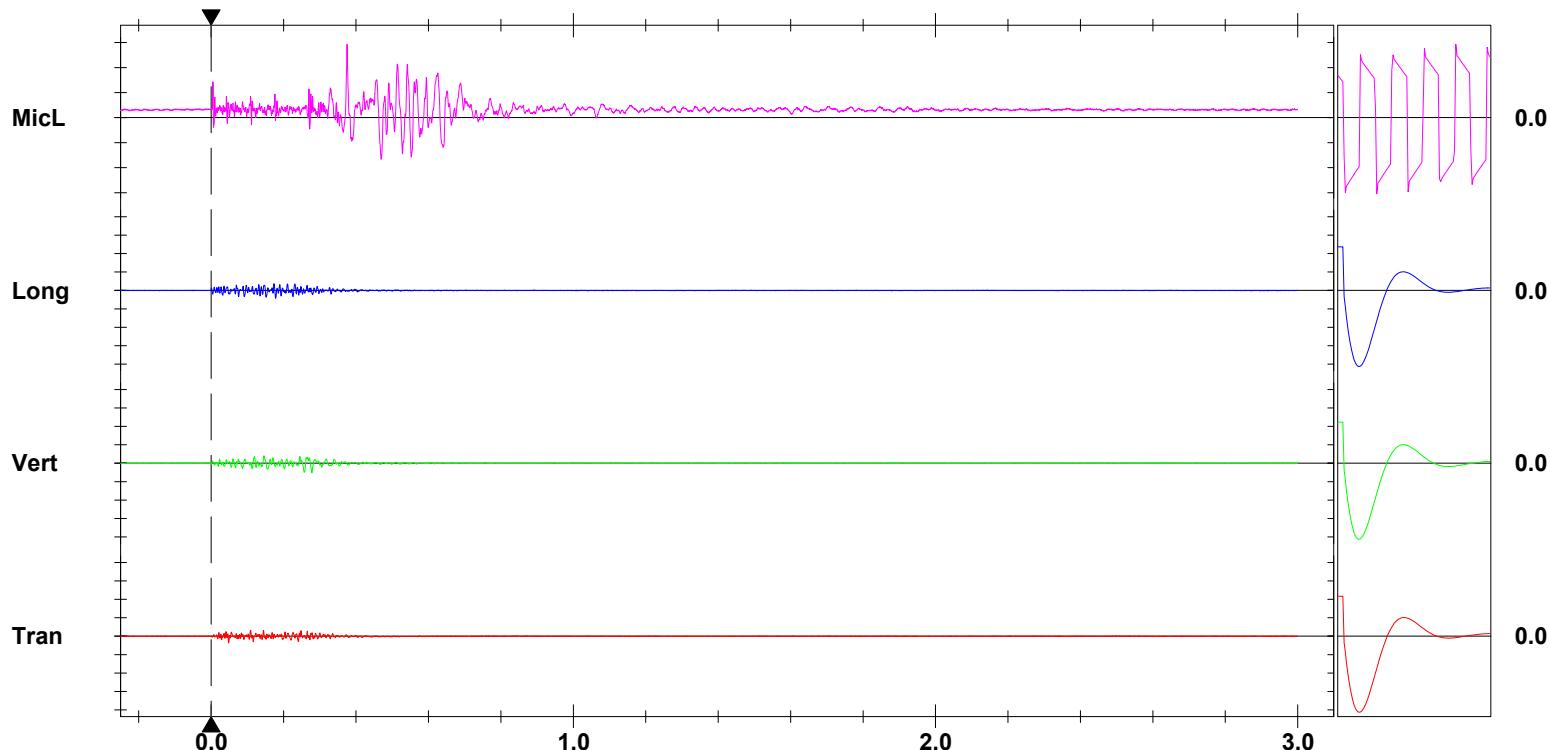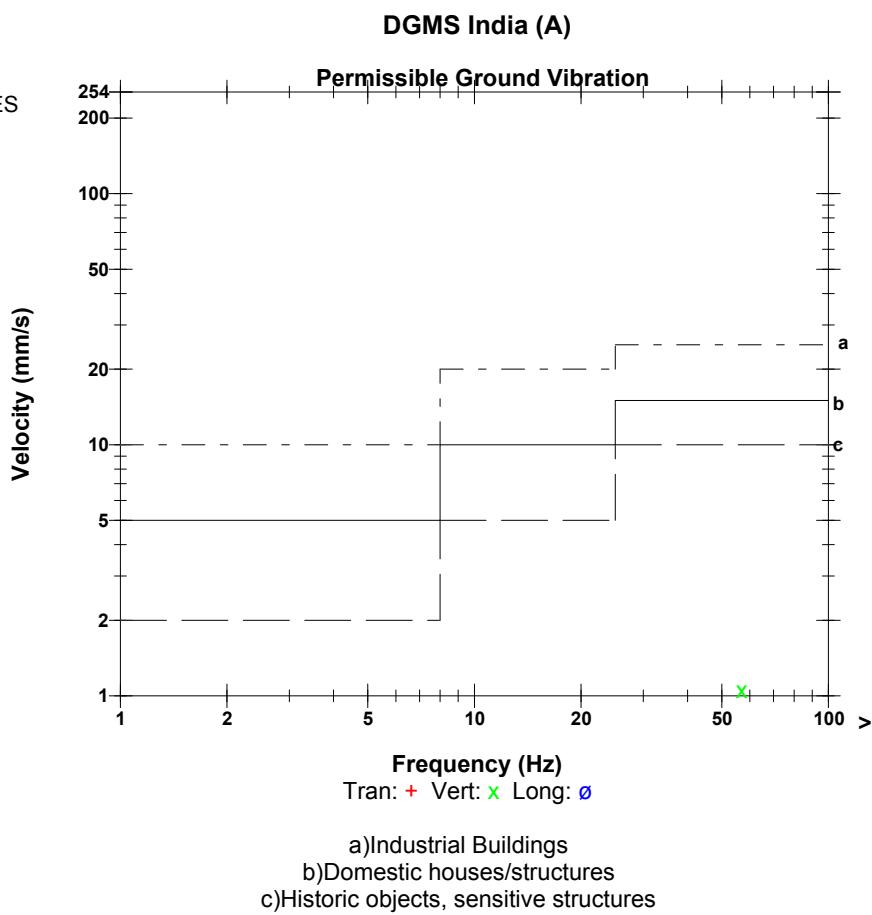

Time Scale: 0.20 sec/div Amplitude Scale: Geo: 2.000 mm/s/div Mic: 2.000 pa.(L)/div
 Trigger = ► — ◀


Sensor Check

Date/Time Vert at 09:45:54 March 7, 2025
Trigger Source Geo: 0.127 mm/s, Mic: 100.00 dB(L)
Range Geo: 254.0 mm/s
Record Time 3.0 sec at 2048 sps
Job Number: 1
Operator/Setup: Operator/factory.MMB

Serial Number UM18455 V 10-90FB Micromate ISEE
Battery Level 3.8 Volts
Unit Calibration January 6, 2025 by UES New Delhi
File Name UM18455_20250307094554.IDFW
Scaled Distance 138.5 (115.9 m, 0.7 kg)

Notes

Location: STATION- 2
 Client: GEORGE KOCHUPARAMBIL
 User Name: GLOBAL ENVIRONMENT AND MINING SERVICES
 General:

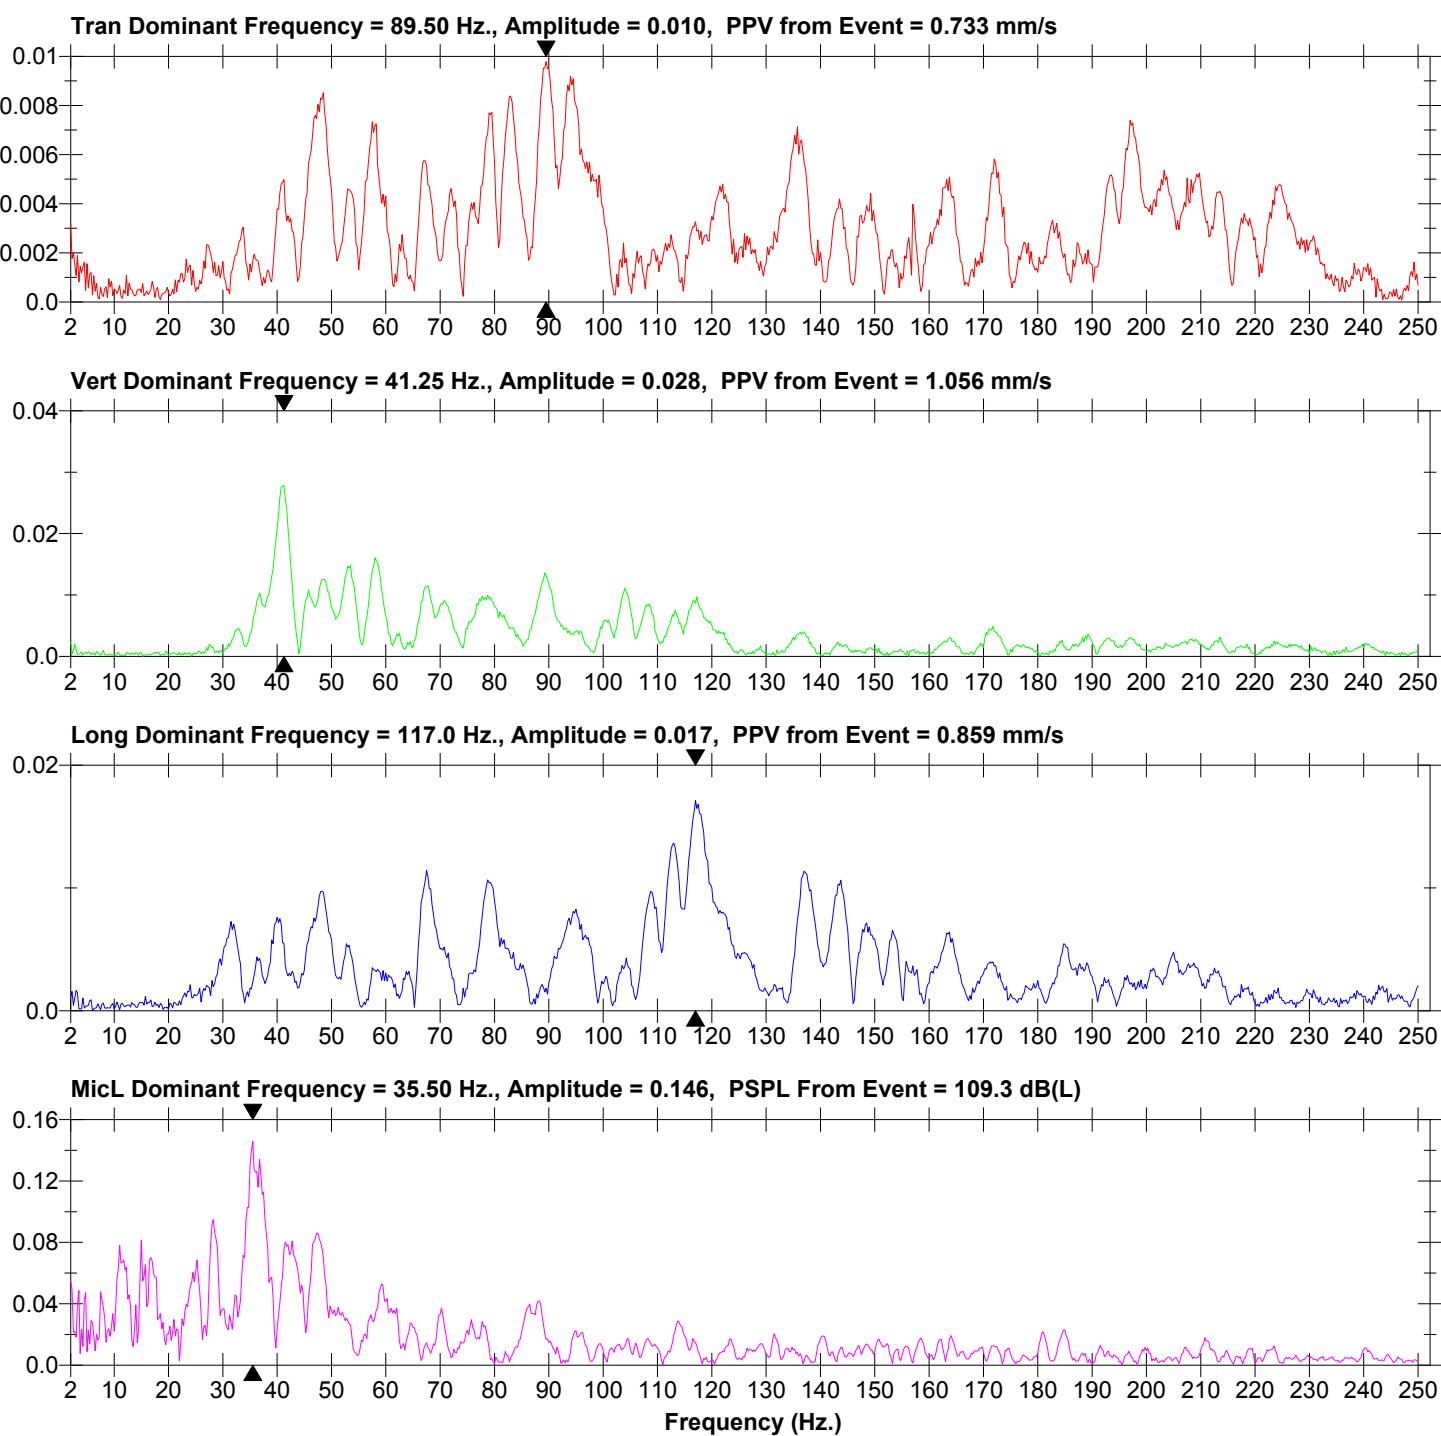

Date/Time Long at 09:47:48 March 7, 2025
 Trigger Source Geo: 0.127 mm/s, Mic: 100.00 dB(L)
 Range Geo: 254.0 mm/s
 Record Time 3.0 sec at 2048 sps
 Job Number: 1
 Operator/Setup: Operator/factory.MMB

Serial Number UM18455 V 10-90FB Micromate ISEE
 Battery Level 3.8 Volts
 Unit Calibration January 6, 2025 by UES New Delhi
 File Name UM18455_20250307094748.IDFW
 Scaled Distance 138.5 (115.9 m, 0.7 kg)



Notes
 Location: STATION-2
 Client: GEORGE KOCHUPARAMBIL
 User Name: GLOBAL ENVIRONMENT AND MINING SERVICES
 General:

Microphone Linear Weighting
 PSPL 106.6 dB(L) at 0.565 sec
 ZC Freq N/A
 Channel Test Passed (Freq = 19.7 Hz Amp = 1187 mv)

	Tran	Vert	Long	
PPV	0.418	0.757	0.899	mm/s
ZC Freq	73	60	73	Hz
Time (Rel. to Trig)	0.065	0.067	0.038	sec
Peak Acceleration	0.028	0.033	0.046	g
Peak Displacement	0.001	0.002	0.002	mm
Sensor Check	Passed	Passed	Passed	
Frequency	7.3	7.3	7.5	Hz
Overswing Ratio	4.1	4.1	4.1	

Peak Vector Sum 0.999 mm/s at 0.038 sec

N/A: Not Applicable

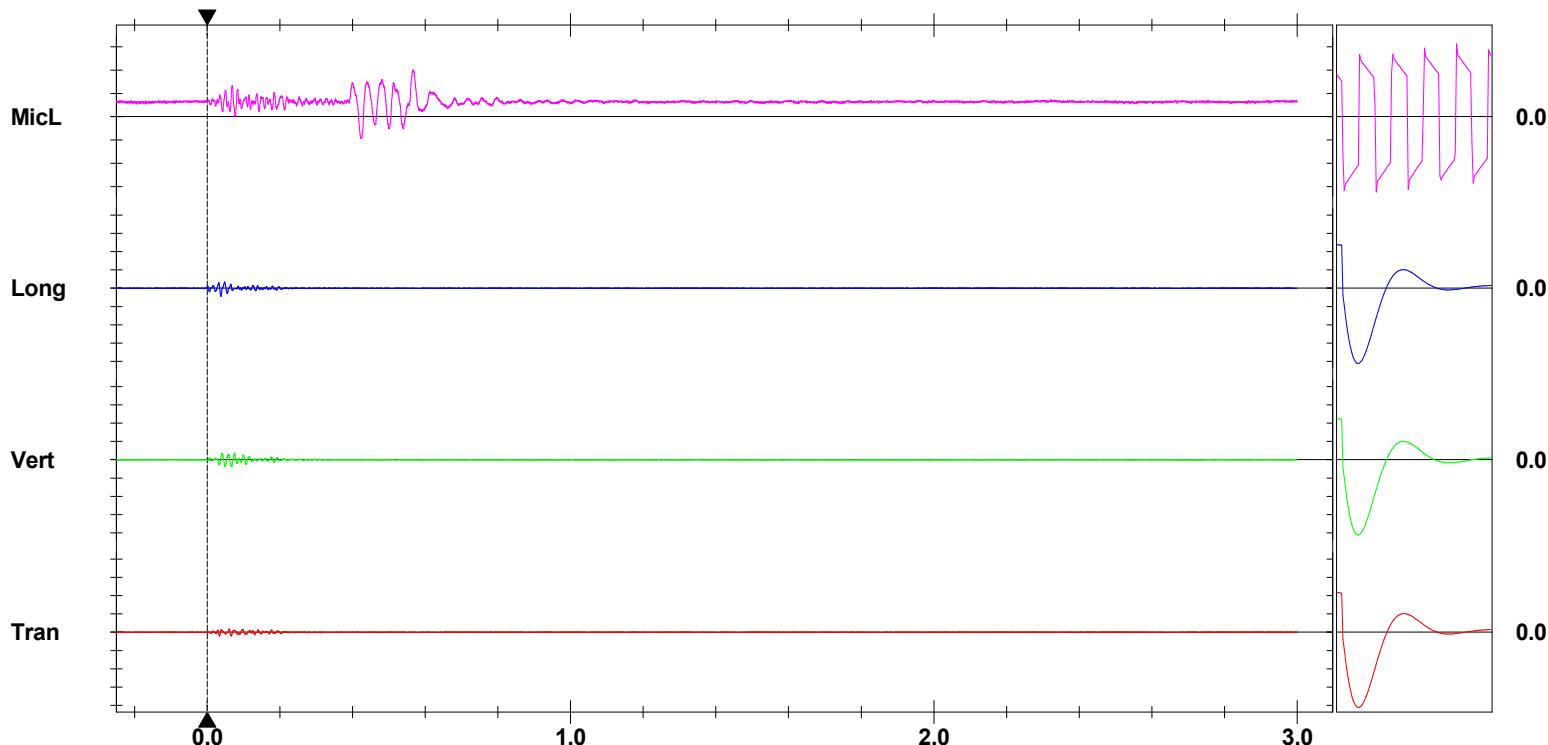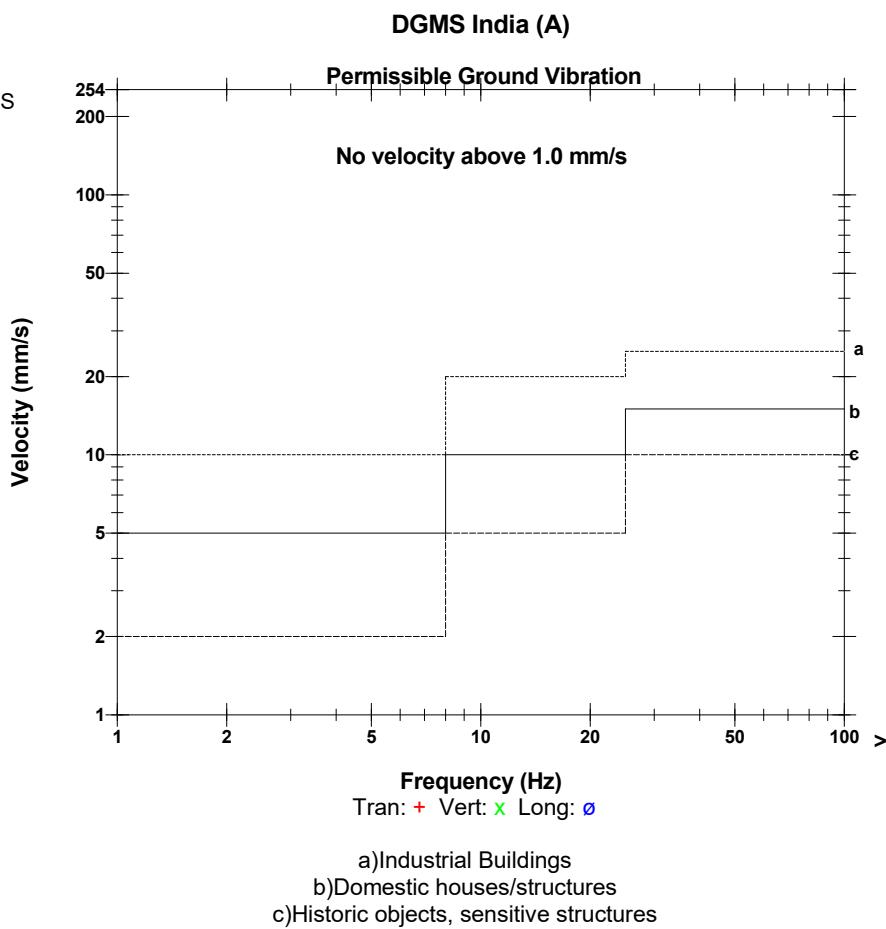

Time Scale: 0.20 sec/div Amplitude Scale: Geo: 2.000 mm/s/div Mic: 1.000 pa.(L)/div
 Trigger = ►-----►


Sensor Check

Date/Time Long at 09:47:48 March 7, 2025
Trigger Source Geo: 0.127 mm/s, Mic: 100.00 dB(L)
Range Geo: 254.0 mm/s
Record Time 3.0 sec at 2048 sps
Job Number: 1
Operator/Setup: Operator/factory.MMB

Serial Number UM18455 V 10-90FB Micromate ISEE
Battery Level 3.8 Volts
Unit Calibration January 6, 2025 by UES New Delhi
File Name UM18455_20250307094748.IDFW
Scaled Distance 138.5 (115.9 m, 0.7 kg)

Notes

Location: STATION-2
 Client: GEORGE KOCHUPARAMBIL
 User Name: GLOBAL ENVIRONMENT AND MINING SERVICES
 General:

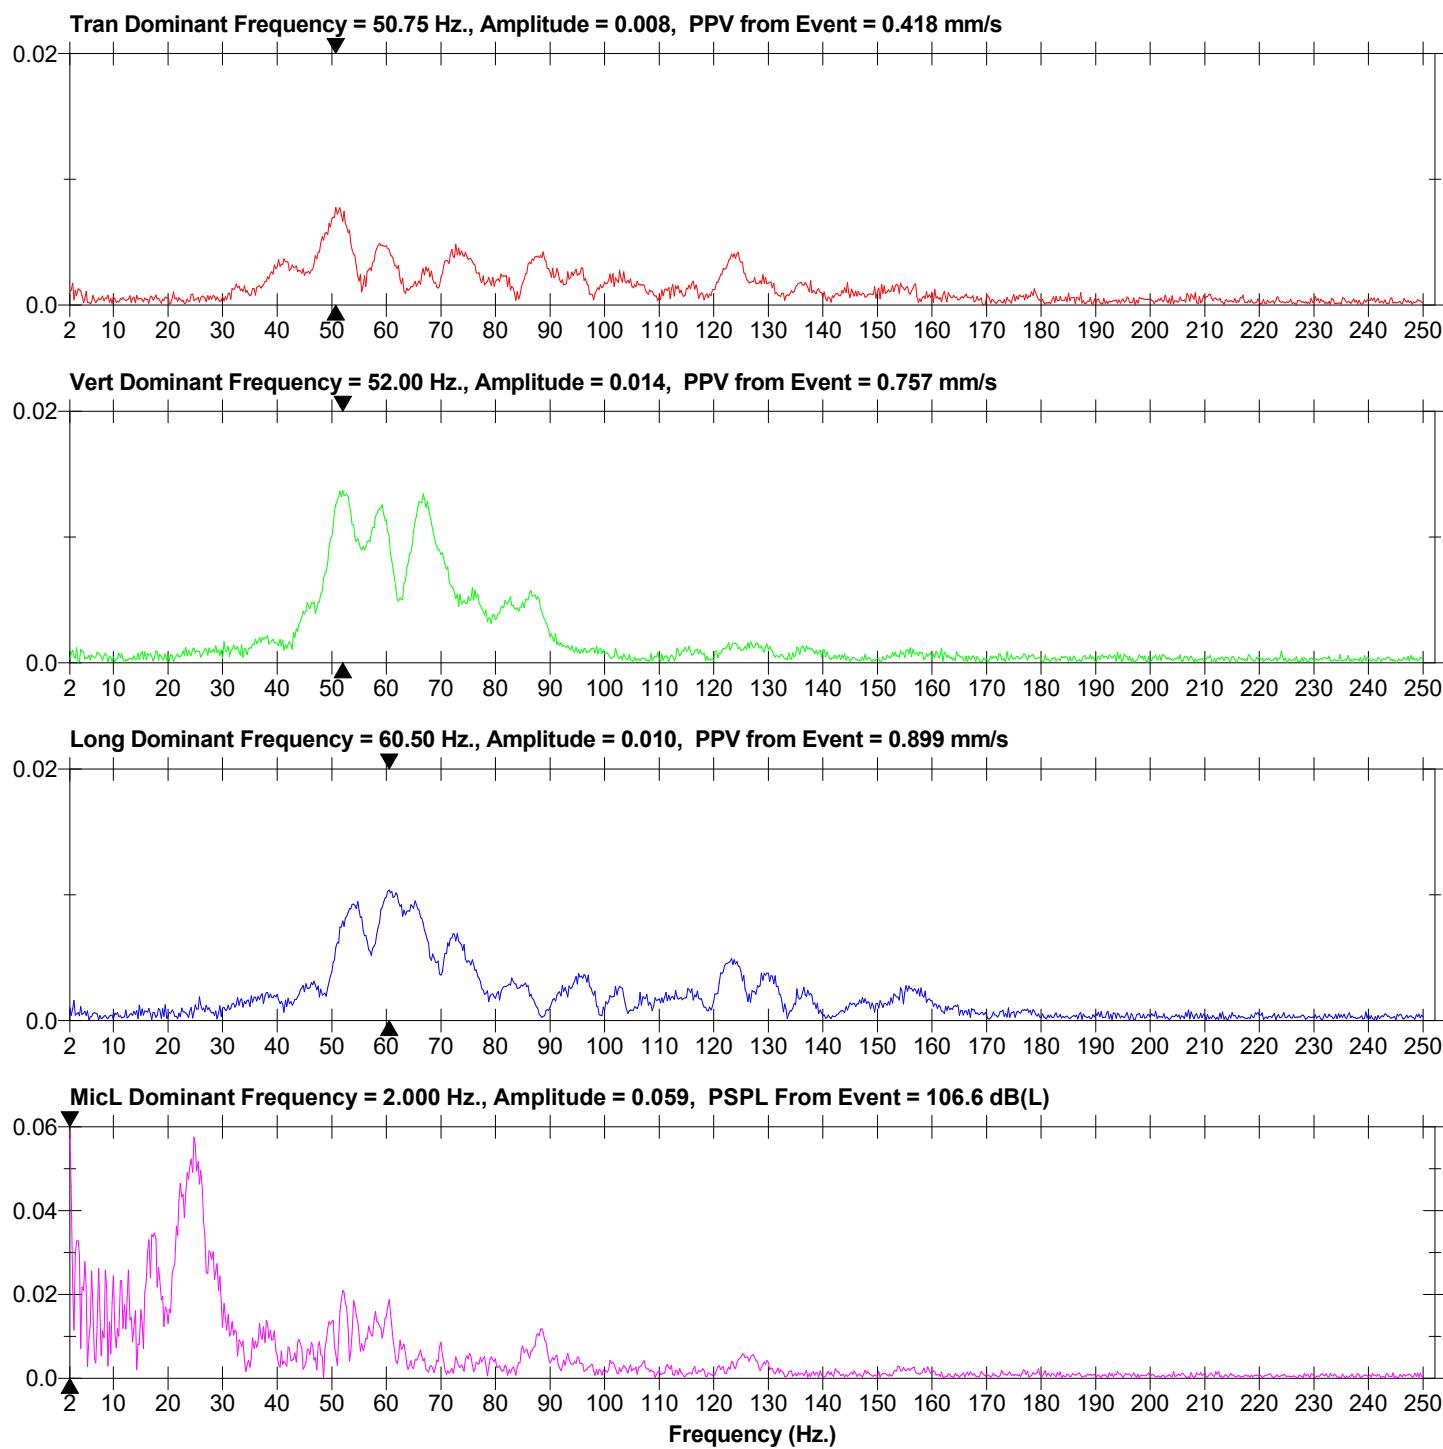

Date/Time Long at 09:49:11 March 7, 2025
Trigger Source Geo: 0.127 mm/s, Mic: 100.00 dB(L)
Range Geo: 254.0 mm/s
Record Time 3.0 sec at 2048 sps
Job Number: 1
Operator/Setup: Operator/factory.MMB



Serial Number UM18455 V 10-90FB Micromate ISEE
Battery Level 3.8 Volts
Unit Calibration January 6, 2025 by UES New Delhi
File Name UM18455_20250307094911.IDFW
Scaled Distance 138.5 (115.9 m, 0.7 kg)

Notes
Location: STATION- 2
Client: GEORGE KOCHUPARAMBIL
User Name: GLOBAL ENVIRONMENT AND MINING SERVICES
General:

Microphone Linear Weighting
PSPL 113.4 dB(L) at 0.442 sec
ZC Freq 30 Hz
Channel Test Passed (Freq = 19.7 Hz Amp = 1162 mv)

	Tran	Vert	Long	
PPV	0.481	0.591	0.765	mm/s
ZC Freq	114	79	102	Hz
Time (Rel. to Trig)	0.178	0.214	0.165	sec
Peak Acceleration	0.043	0.031	0.051	g
Peak Displacement	0.001	0.001	0.001	mm
Sensor Check	Passed	Passed	Passed	
Frequency	7.3	7.3	7.5	Hz
Overswing Ratio	4.1	4.1	4.1	

Peak Vector Sum 0.885 mm/s at 0.165 sec

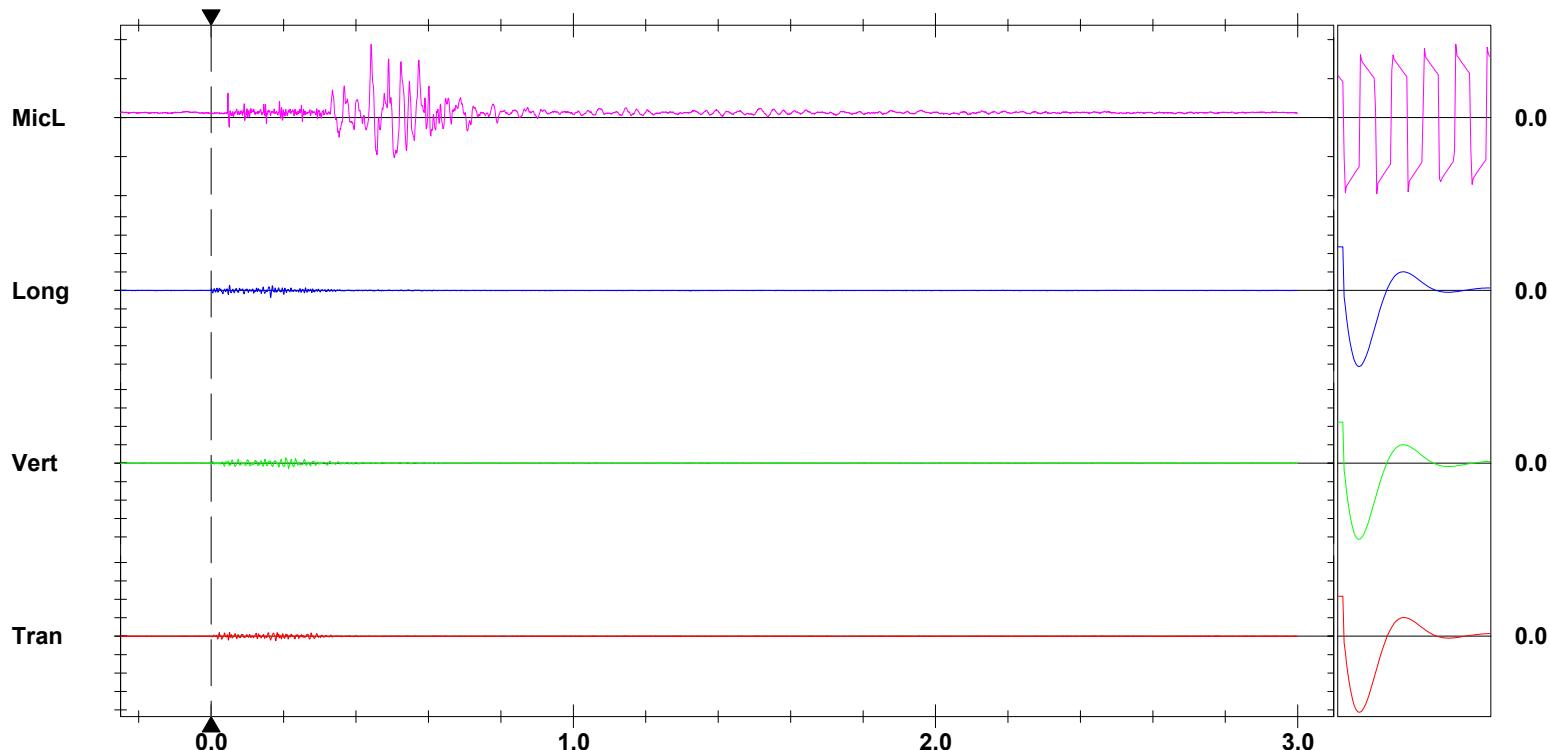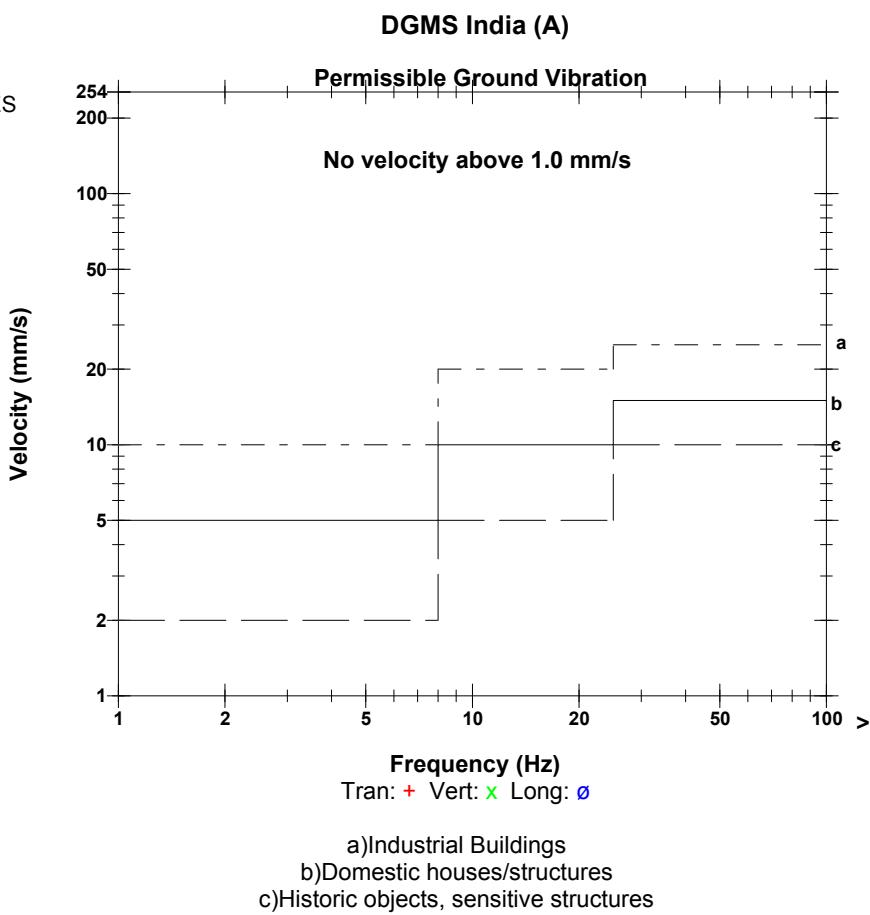

Time Scale: 0.20 sec/div **Amplitude Scale:** Geo: 2.000 mm/s/div Mic: 5.000 pa.(L)/div
Trigger = ► — ◀


Sensor Check

Date/Time Long at 09:49:11 March 7, 2025
Trigger Source Geo: 0.127 mm/s, Mic: 100.00 dB(L)
Range Geo: 254.0 mm/s
Record Time 3.0 sec at 2048 sps
Job Number: 1
Operator/Setup: Operator/factory.MMB

Serial Number UM18455 V 10-90FB Micromate ISEE
Battery Level 3.8 Volts
Unit Calibration January 6, 2025 by UES New Delhi
File Name UM18455_20250307094911.IDFW
Scaled Distance 138.5 (115.9 m, 0.7 kg)

Notes

Location: STATION- 2
Client: GEORGE KOCHUPARAMBIL
User Name: GLOBAL ENVIRONMENT AND MINING SERVICES
General:

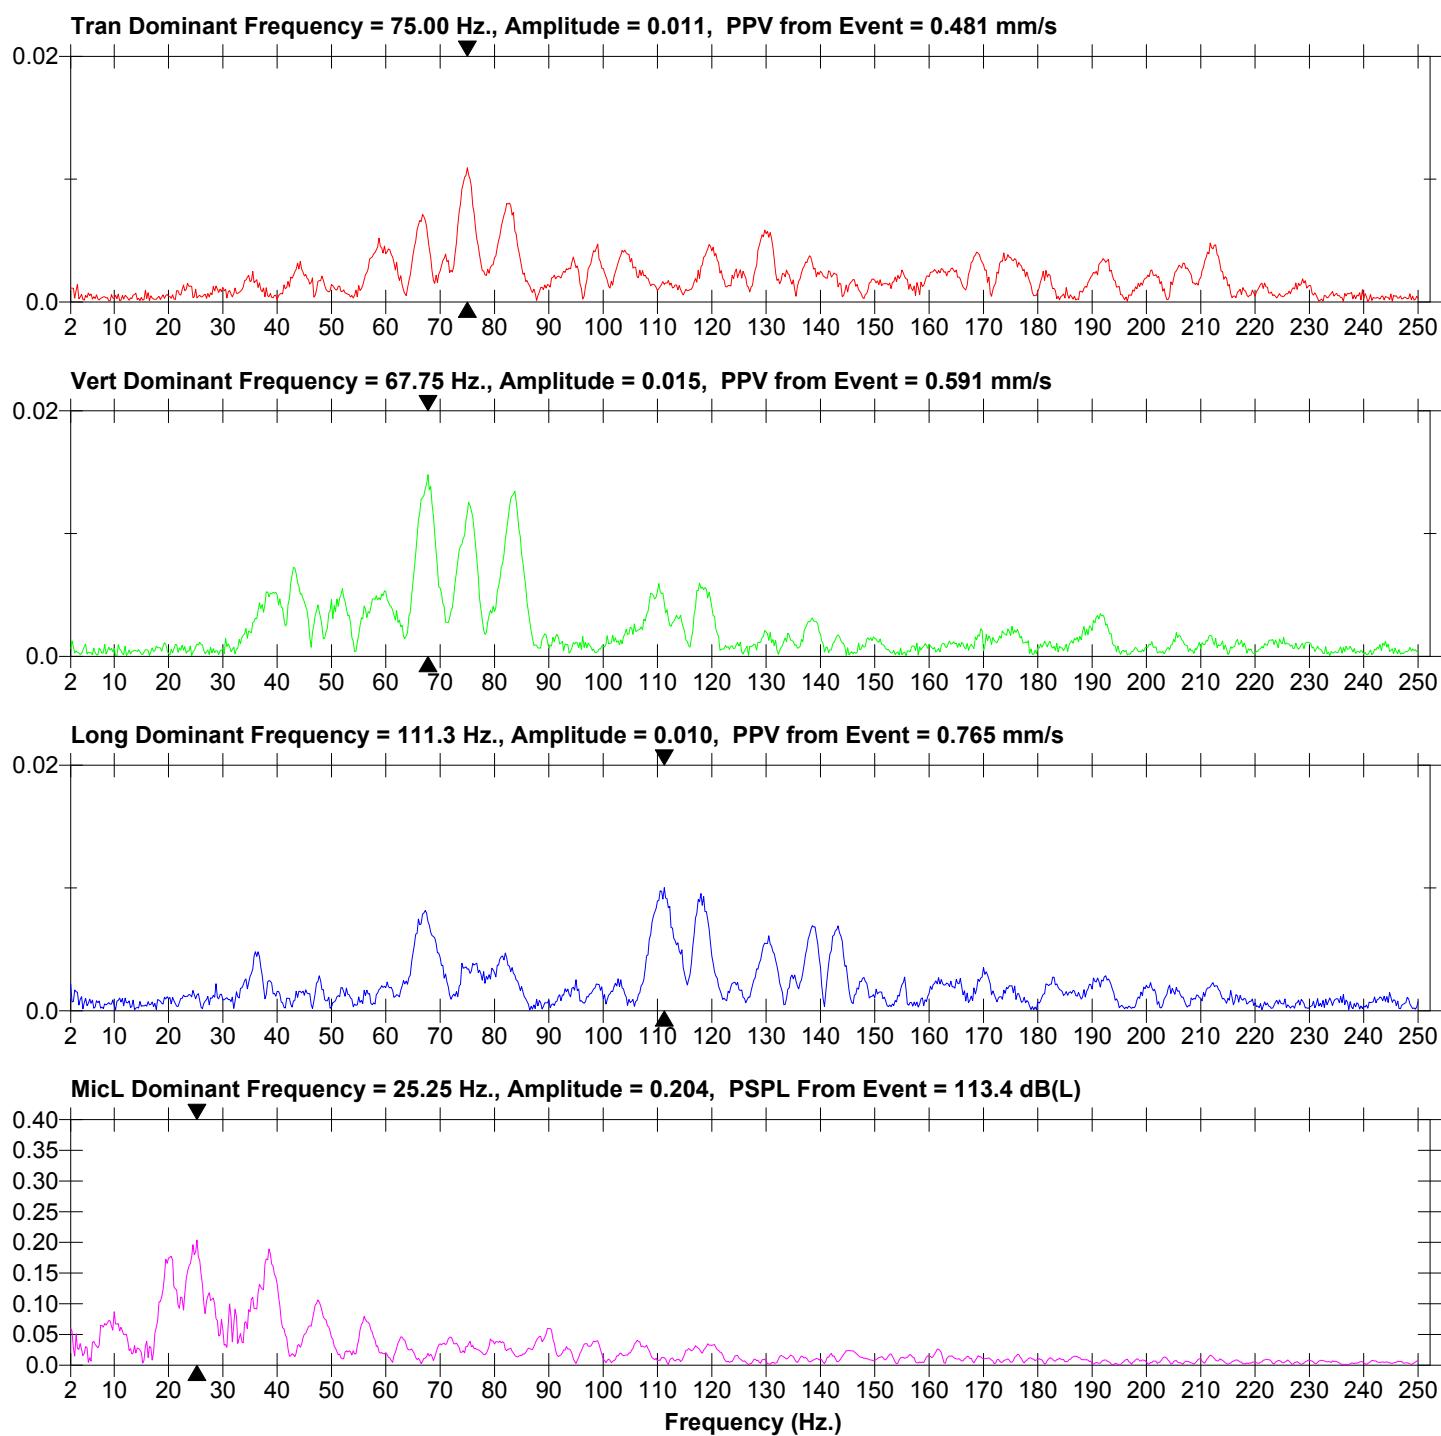

Date/Time Tran at 12:35:58 March 7, 2025
Trigger Source Geo: 0.127 mm/s, Mic: 100.00 dB(L)
Range Geo: 254.0 mm/s
Record Time 3.0 sec at 2048 sps
Job Number: 1
Operator/Setup: Operator/factory.MMB



Serial Number UM18455 V 10-90FB Micromate ISEE
Battery Level 3.8 Volts
Unit Calibration January 6, 2025 by UES New Delhi
File Name UM18455_20250307123558.IDFW
Scaled Distance 265.6 (168.0 m, 0.4 kg)

Notes
Location: STATION- 4
Client: GEORGE KOCHUPARAMBIL
User Name: GLOBAL ENVIRONMENT AND MINING SERVICES
General:

Microphone Linear Weighting
PSPL 108.5 dB(L) at 0.504 sec
ZC Freq 19.3 Hz
Channel Test Passed (Freq = 19.7 Hz Amp = 1172 mv)

	Tran	Vert	Long	
PPV	0.205	0.181	0.166	mm/s
ZC Freq	171	171	171	Hz
Time (Rel. to Trig)	0.000	0.193	0.067	sec
Peak Acceleration	0.023	0.016	0.023	g
Peak Displacement	0.000	0.000	0.000	mm
Sensor Check	Passed	Passed	Passed	
Frequency	7.3	7.5	7.3	Hz
Overswing Ratio	4.1	4.1	4.2	

Peak Vector Sum 0.233 mm/s at 0.108 sec

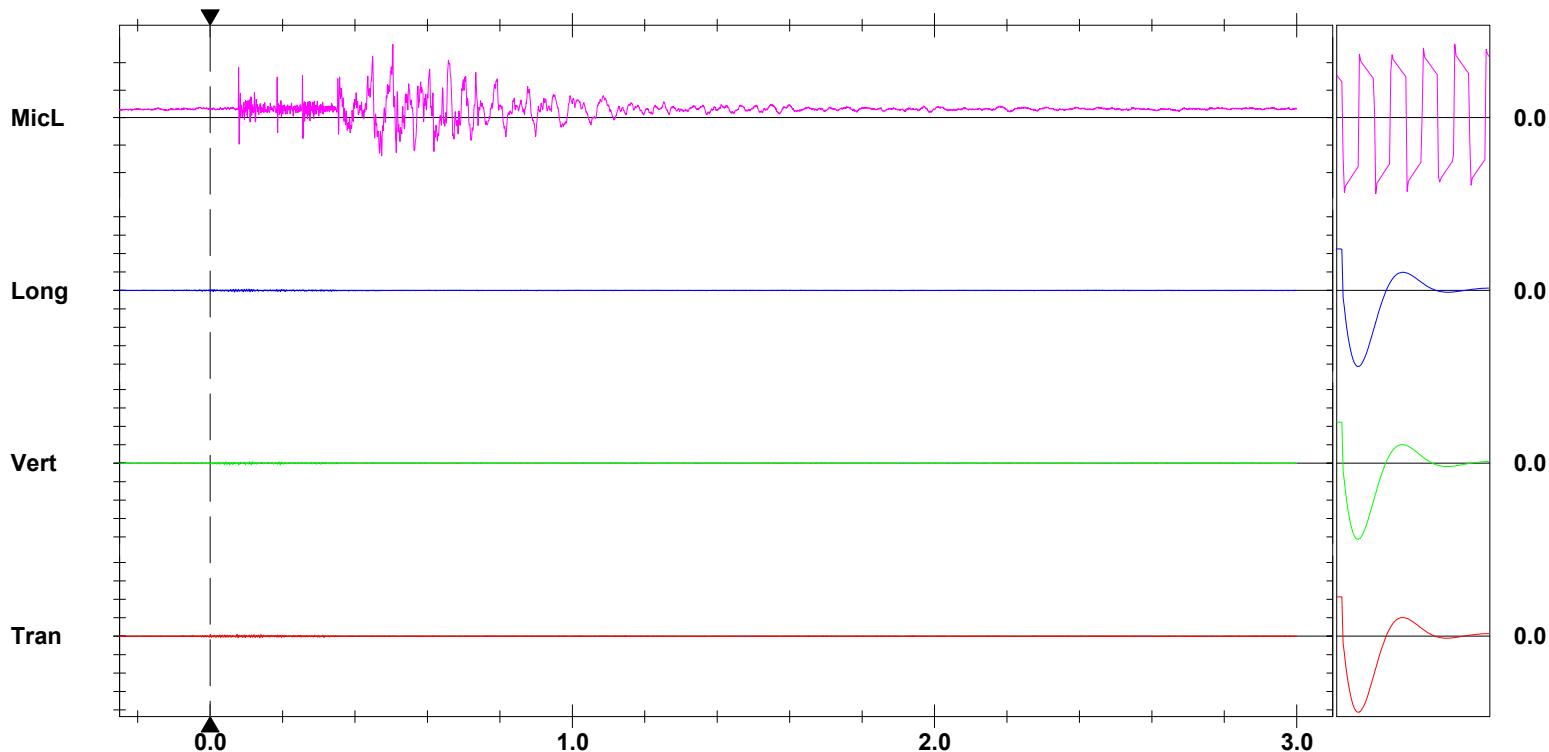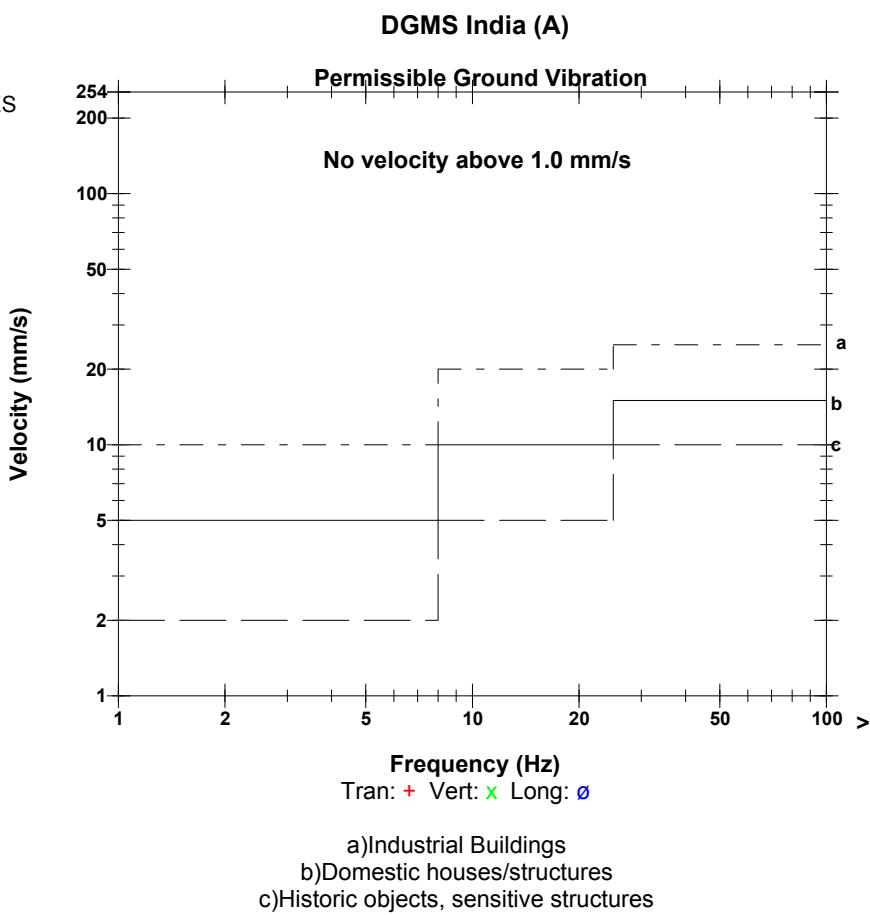

Time Scale: 0.20 sec/div Amplitude Scale: Geo: 2.000 mm/s/div Mic: 2.000 pa.(L)/div
 Trigger = ►—————◀


Sensor Check

Date/Time Tran at 12:35:58 March 7, 2025
Trigger Source Geo: 0.127 mm/s, Mic: 100.00 dB(L)
Range Geo: 254.0 mm/s
Record Time 3.0 sec at 2048 sps
Job Number: 1
Operator/Setup: Operator/factory.MMB

Serial Number UM18455 V 10-90FB Micromate ISEE
Battery Level 3.8 Volts
Unit Calibration January 6, 2025 by UES New Delhi
File Name UM18455_20250307123558.IDFW
Scaled Distance 265.6 (168.0 m, 0.4 kg)

Notes

Location: STATION- 4
 Client: GEORGE KOCHUPARAMBIL
 User Name: GLOBAL ENVIRONMENT AND MINING SERVICES
 General:

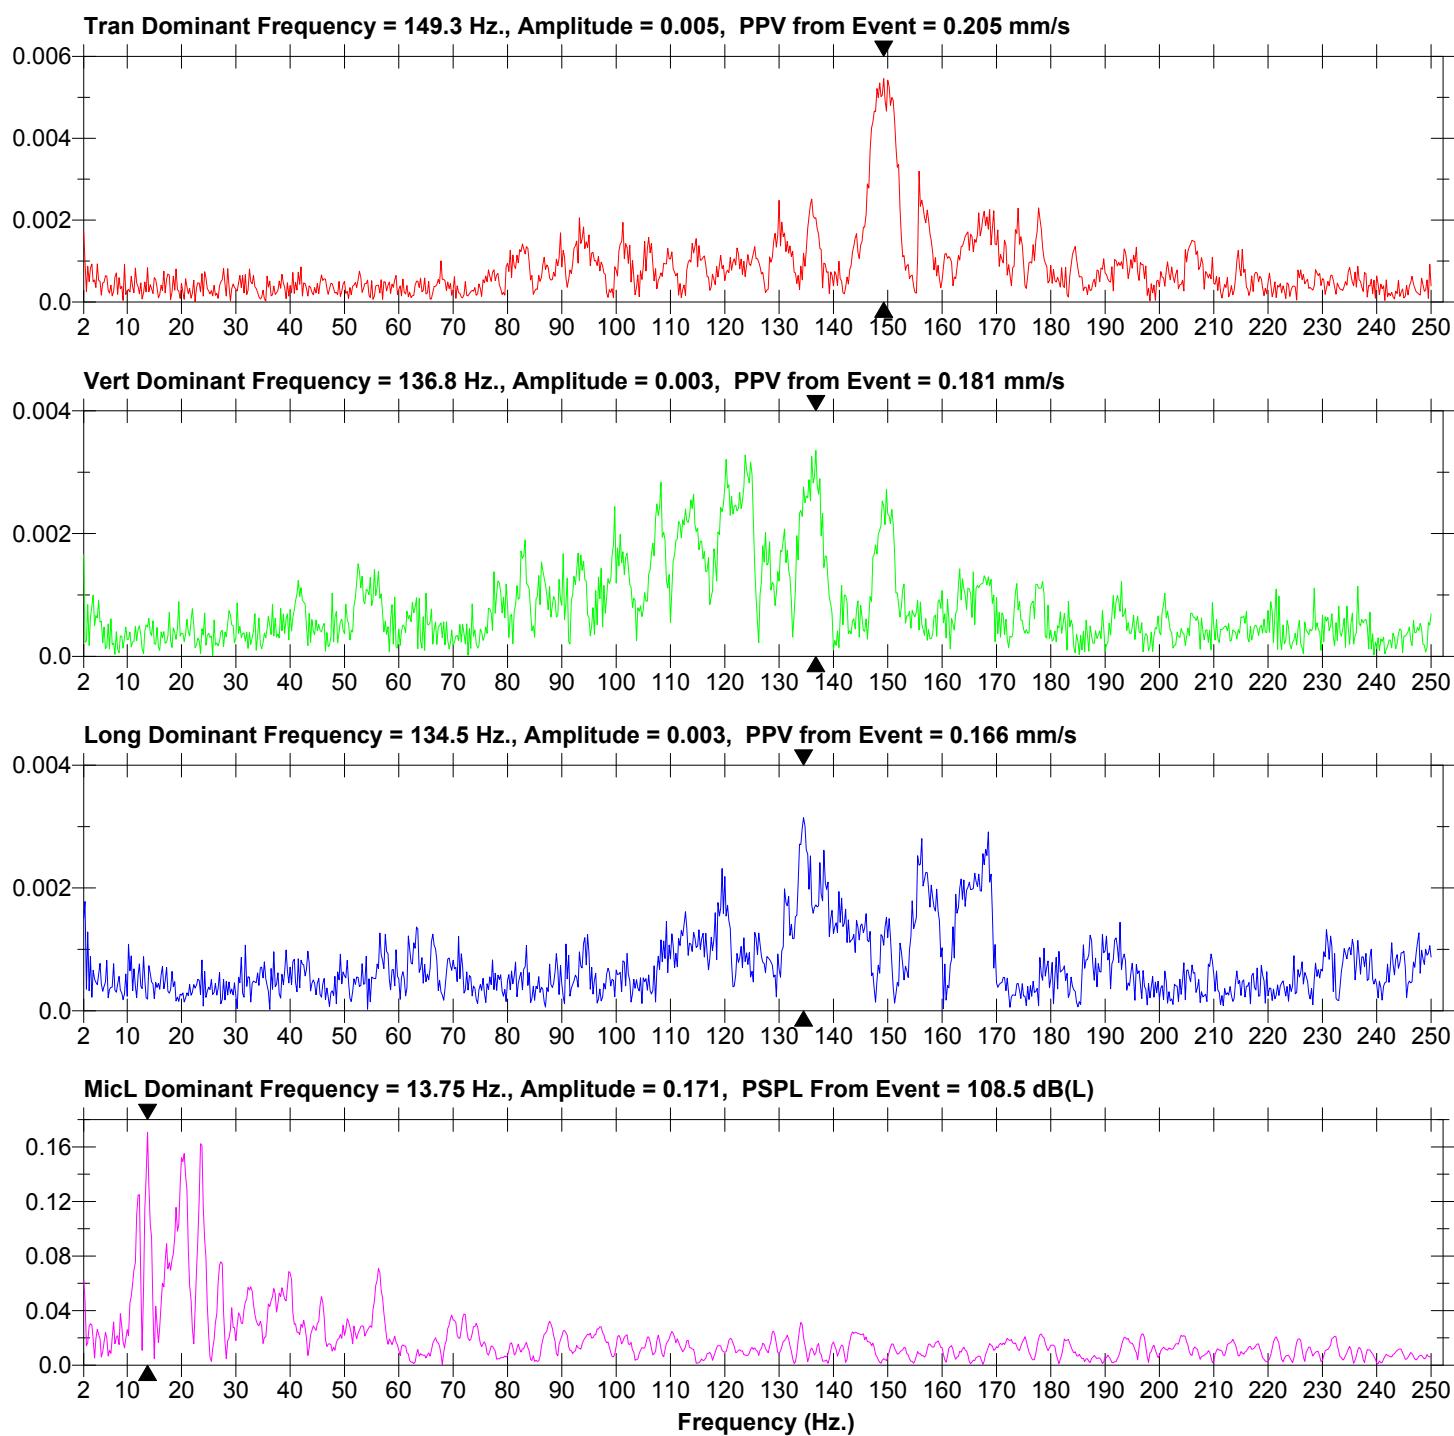

Date/Time MicL at 12:37:26 March 7, 2025
Trigger Source Geo: 0.127 mm/s, Mic: 100.00 dB(L)
Range Geo: 254.0 mm/s
Record Time 3.0 sec at 2048 sps
Job Number: 1
Operator/Setup: Operator/factory.MMB



Serial Number UM18455 V 10-90FB Micromate ISEE
Battery Level 3.8 Volts
Unit Calibration January 6, 2025 by UES New Delhi
File Name UM18455_20250307123726.IDFW
Scaled Distance 265.6 (168.0 m, 0.4 kg)

Notes
Location: STATION- 4
Client: GEORGE KOCHUPARAMBIL
User Name: GLOBAL ENVIRONMENT AND MINING SERVICES
General:

Microphone Linear Weighting
PSPL 108.2 dB(L) at 0.747 sec
ZC Freq 51 Hz
Channel Test Passed (Freq = 19.7 Hz Amp = 1172 mv)

	Tran	Vert	Long	
PPV	0.307	0.181	0.268	mm/s
ZC Freq	171	114	>200	Hz
Time (Rel. to Trig)	0.232	0.192	0.290	sec
Peak Acceleration	0.041	0.026	0.031	g
Peak Displacement	0.000	0.000	0.000	mm
Sensor Check	Passed	Passed	Passed	
Frequency	7.3	7.5	7.3	Hz
Overswing Ratio	4.1	4.1	4.2	

Peak Vector Sum 0.327 mm/s at 0.276 sec

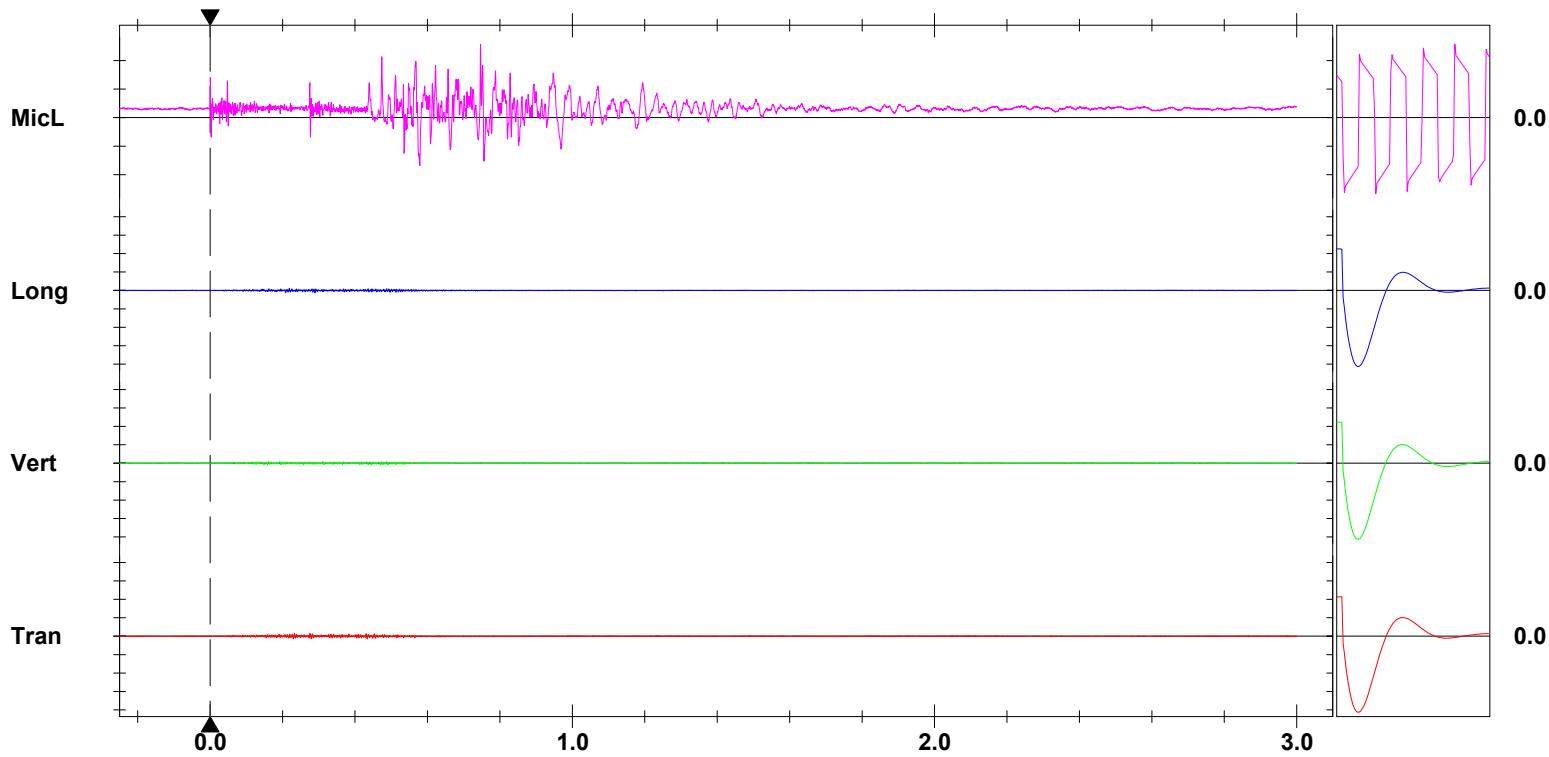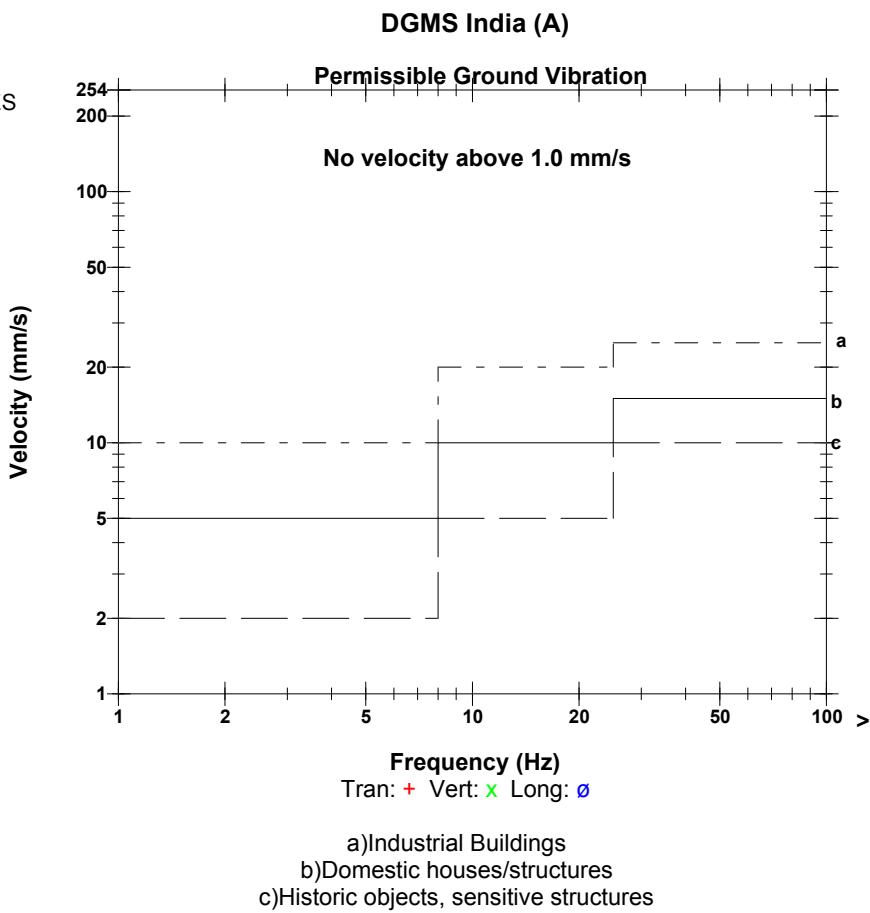

Time Scale: 0.20 sec/div **Amplitude Scale:** Geo: 2.000 mm/s/div Mic: 2.000 pa.(L)/div
Trigger = ► ←

Sensor Check


Date/Time MicL at 12:37:26 March 7, 2025
Trigger Source Geo: 0.127 mm/s, Mic: 100.00 dB(L)
Range Geo: 254.0 mm/s
Record Time 3.0 sec at 2048 sps
Job Number: 1
Operator/Setup: Operator/factory.MMB

Serial Number UM18455 V 10-90FB Micromate ISEE
Battery Level 3.8 Volts
Unit Calibration January 6, 2025 by UES New Delhi
File Name UM18455_20250307123726.IDFW
Scaled Distance 265.6 (168.0 m, 0.4 kg)


Notes

Location: STATION- 4
Client: GEORGE KOCHUPARAMBIL
User Name: GLOBAL ENVIRONMENT AND MINING SERVICES
General:


Tran Dominant Frequency = 160.8 Hz., Amplitude = 0.008, PPV from Event = 0.307 mm/s

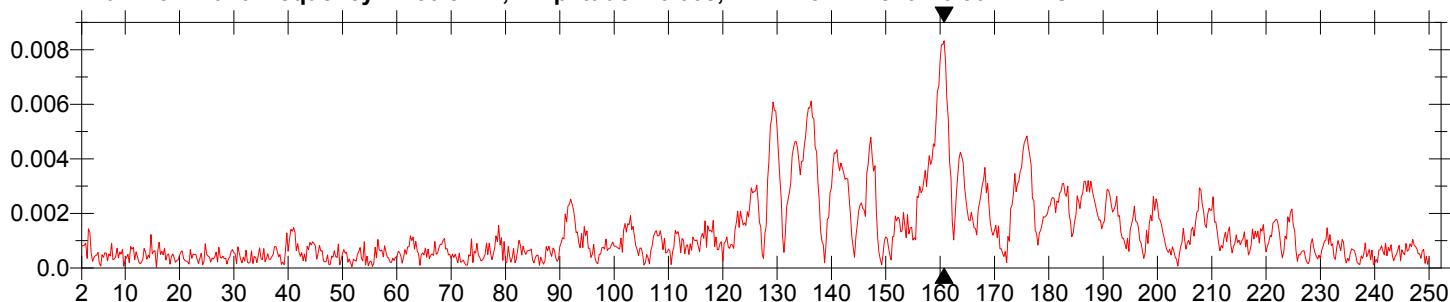

Vert Dominant Frequency = 129.0 Hz., Amplitude = 0.006, PPV from Event = 0.181 mm/s

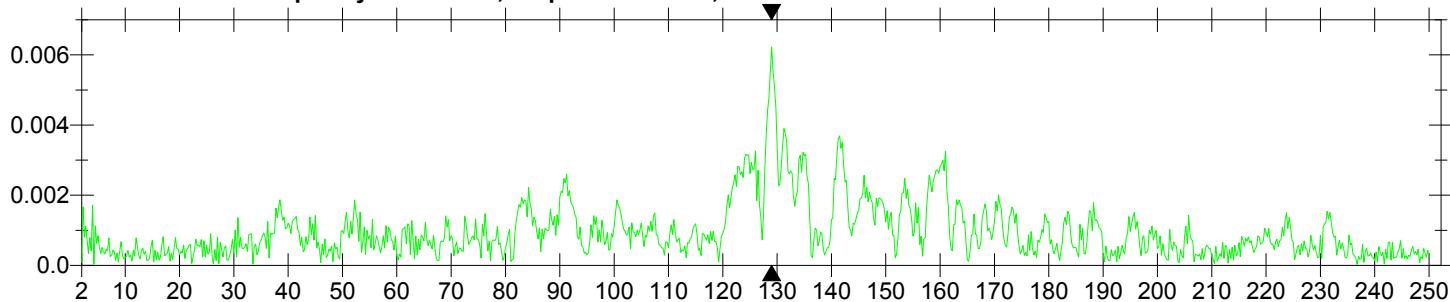

Long Dominant Frequency = 135.3 Hz., Amplitude = 0.005, PPV from Event = 0.268 mm/s

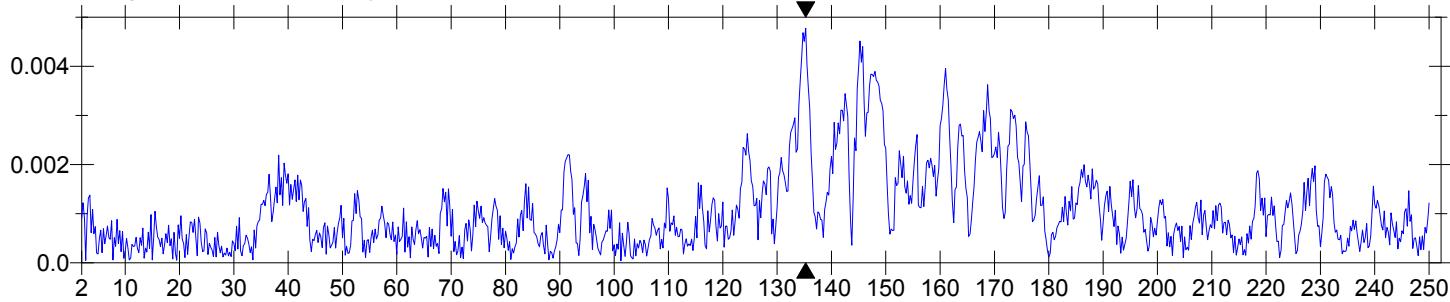

MicL Dominant Frequency = 25.25 Hz., Amplitude = 0.148, PSPL From Event = 108.2 dB(L)

